


BYIBA
L I G H T

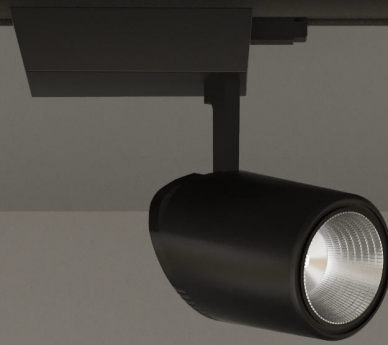

BLACK TIE
(track)

BY-43-TR

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The Black Tie Non-Magnetic Track system features 1-Circuit and 3-Circuit profiles available in three lengths: 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). Operating on 110-277V, the track comes in white or black finishes, crafted from aluminum with electrostatic powder coating for durability.

Included is a spotlight model measuring Ø 3.85" (10 cm) x W 5.9" (15 cm), with a 20W LED light source. It offers CCT options of 3000K or 4000K, CRI choices of 80 or 90, and is available in white, black, or gray finishes, providing versatile lighting solutions for indoor spaces.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black, Gray

LIGHTING:

LED

VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS




CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

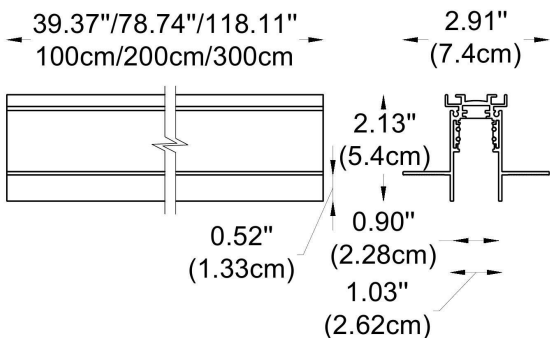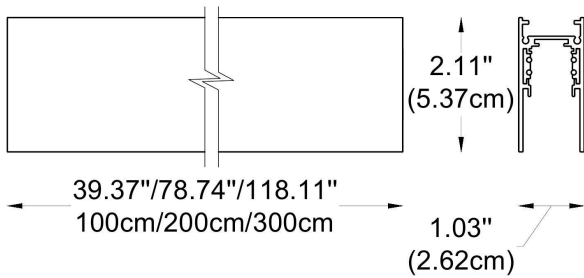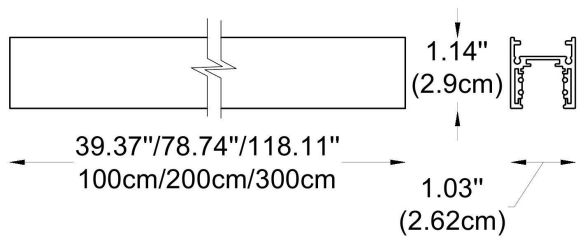

HOW TO ORDER:


CODE:

Example:
CODE: BY-43-TR-1-01-BL-63732-03-K30-C80-B1-WL

BY-43-TR-
BL1-01-63732-0
1-K30-C80-WL

1 CHOOSE TRACK MODEL:

1-Circuit Track Profile

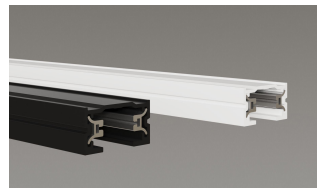


-1-01 L: 39.4" (100 cm)

-1-02 L: 78.7" (200 cm)

-1-03 L: 118" (300 cm)

3-Circuit Track Profile

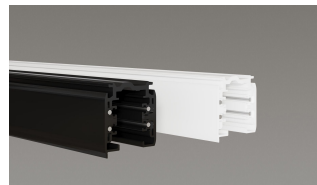

-2-01 L: 39.4" (100 cm)

-2-02 L: 78.7" (200 cm)

-2-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

-BL Black
-WH White

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

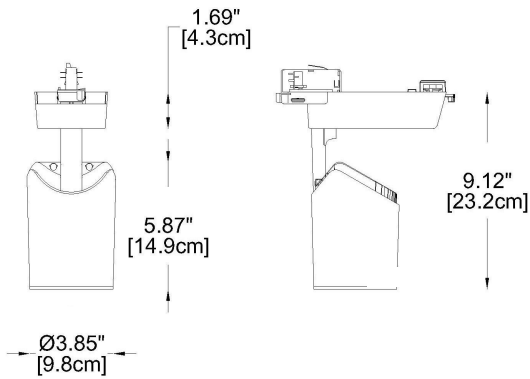

HOW TO ORDER:

CODE:

Example:
CODE: BY-43-TR-1-01-BL-63732-K30-C80-B1-WL

BY-43-TR-
BL1-01-63732-
K30-C80-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -63732
 Dimensions: Ø: 3.85" (10 cm) x W: 5.9" (15 cm)
 Housing: AL. Extrude, Electrostatic Powder Coating
 Reflector: PC (Vacuum Coating)
 Gear Box: AL. Die-Casting, Electrostatic Powder Coating
 Light Source: LED (COB)
 Power: 20W
 Output Current 500 mA

CCT: -K30 - 3000K
 -K40 - 4000K


CRI: -C80 - 80
 -C90 - 90

Beam Angle and lumens: -B1 - 17.7° = 2277 lm
 -B2 - 25.5° = 2244 lm
 -B3 - 38.9° = 2284 lm

Finish options: -WL - White
 -BL - Black
 -GR - Gray


Operating temperature range - -20 to +40°C
 Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

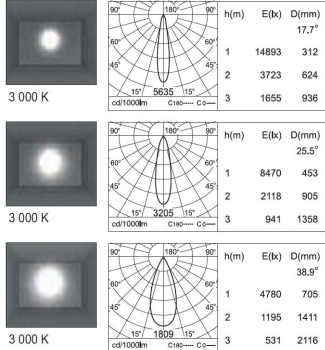


ACCESSORIES FOR 1 CIRCUIT TRACK:


-105
Feed-in Cap
 -BL - Black
 -WH - White





-106
End Cap
 -BL - Black
 -WH - White





-107
Straight Connector
 -BL - Black
 -WH - White





-108
L Connector
 -BL - Black
 -WH - White

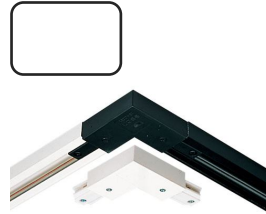



-110
T Connector
 -BL - Black
 -WH - White

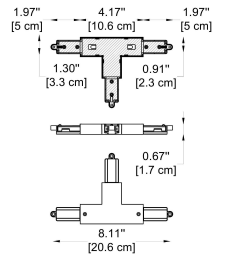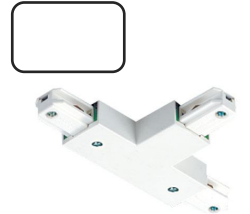

-111
X Connector
 -BL - Black
 -WH - White



-153
Adapter
 -BL - Black
 -WH - White



HOW TO ORDER:

Example:
 CODE: 105-WH

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE




WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com
www.byiba.com
 1 877-964-4646

ACCESSORIES FOR 3CIRCUIT TRACK:


-305
Feed-in Cap
 -BL - Black
 -WH - White

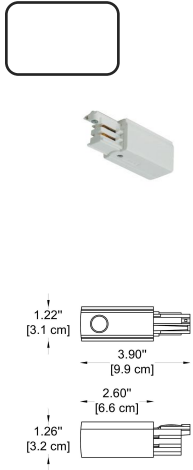


-306
End Cap
 -BL - Black
 -WH - White

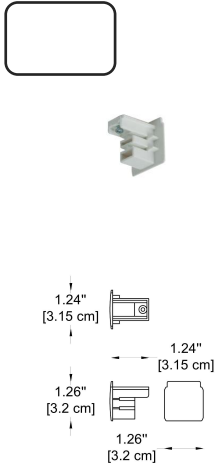


-307
Straight Connector
 -BL - Black
 -WH - White

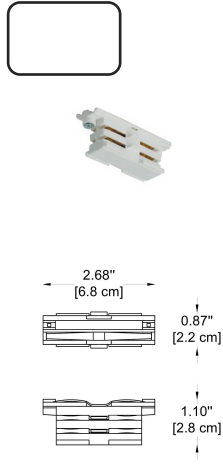


-308
L Connector
 -BL - Black
 -WH - White

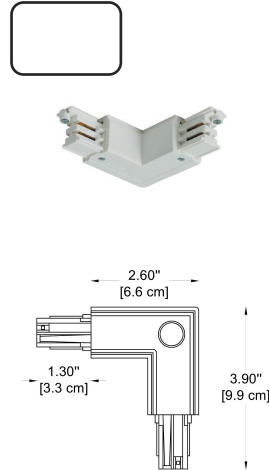


-310
T Connector
 -BL - Black
 -WH - White

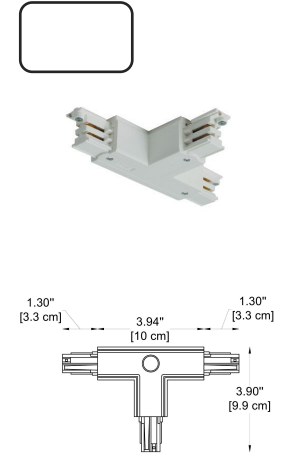

-311
X Connector
 -BL - Black
 -WH - White

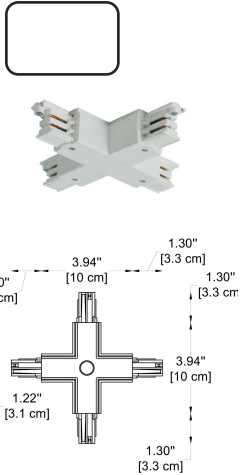

-351
Adapter
 -BL - Black
 -WH - White

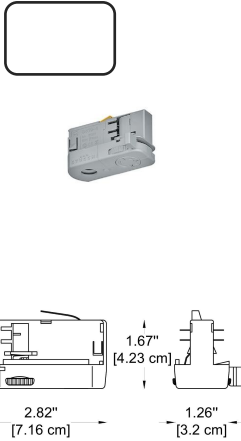

HOW TO ORDER:

Example:
 CODE: -305-BL

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



CONTACT US:

sales@gordonbullard.com
www.byiba.com
 1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS