

BYIBA
L I G H T



TWINKLE COLLECTION
(track)

BY-43-TR

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The Twinkle Non-Magnetic Track Collection features 1-Circuit and 3-Circuit surface-mounted track profiles in three lengths—39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm)—with a voltage of 110-277V. Available in White or Black, the aluminum profiles are coated with electrostatic powder.

The collection includes three spotlight models:

- Ø 2.56" x H 6"
- Ø 2.56" x H 9.21"
- Ø 3.27" x H 6.5"

The spotlights, also made from durable aluminum with an electrostatic powder coating, come with CCT options of 3000K, 4000K, and 5000K, and CRI ratings of 80 or 90 for optimal color rendering. Available in White or Black finishes, the Twinkle Non-Magnetic Track Collection offers a refined and customizable solution for indoor lighting.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black

LIGHTING:

LED

VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



CONTACT US:


sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS

PROJECT

SPEC TYPE

NOTES

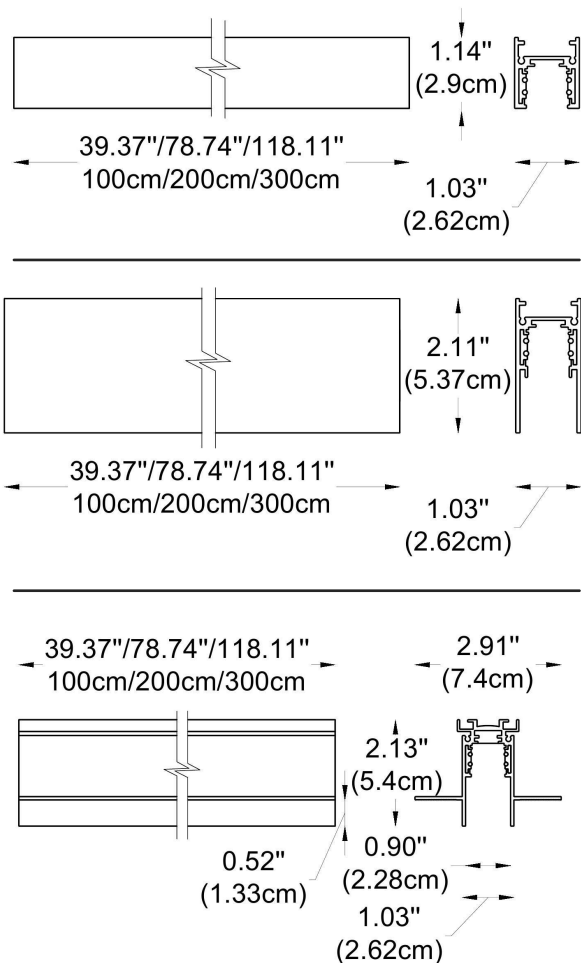

HOW TO ORDER:

CODE:

Example:
CODE: BY-50-TR-1-01-BL-65070-03-K30-C80-B1-WL

BY-50-TR-
BL1-01-65560-0
1-K30-C80-WL


1 CHOOSE TRACK MODEL:

1-Circuit Track Profile



- 1-01 L: 39.4" (100 cm)
- 1-02 L: 78.7" (200 cm)
- 1-03 L: 118" (300 cm)

3-Circuit Track Profile

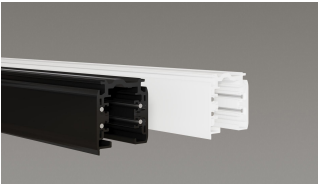

- 2-01 L: 39.4" (100 cm)
- 2-02 L: 78.7" (200 cm)
- 2-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

- BL Black
- WH White

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



CONTACT US:



sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS

PROJECT

SPEC TYPE

NOTES

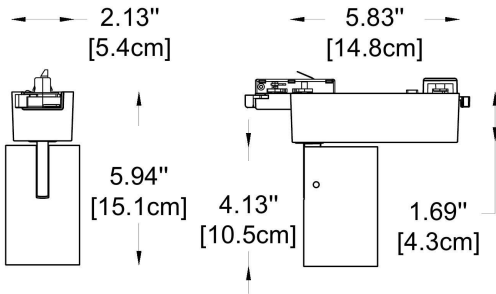

HOW TO ORDER:

CODE:

Example:
CODE: BY-50-TR-1-01-BL-65070-03-K30-C80-B1-WL

BY-50-TR-
BL1-01-65560-0
1-K30-C80-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65070-01**

Dimensions: Ø: 2.56" (6.5 cm) x H: 6" (15 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Reflector: PC (Vacuum Coating)
Light Source: LED (COB)
Power: 14W
Output Current 350 mA

CCT: **-K30 - 3000K**
-K40 - 4000K
-K50 - 5000K


CRI: **-C80 - 80**
-C90 - 90

Beam Angle and lumens: **-B1 - 15.5° = 1450 lm**
-B2 - 28.2° = 1344 lm
-B3 - 39.5° = 1357 lm

Finish options: **-WL - White**
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

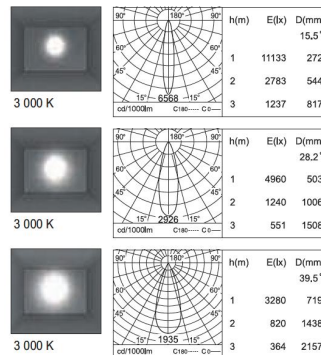

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



CONTACT US:


sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS

PROJECT

SPEC TYPE

NOTES

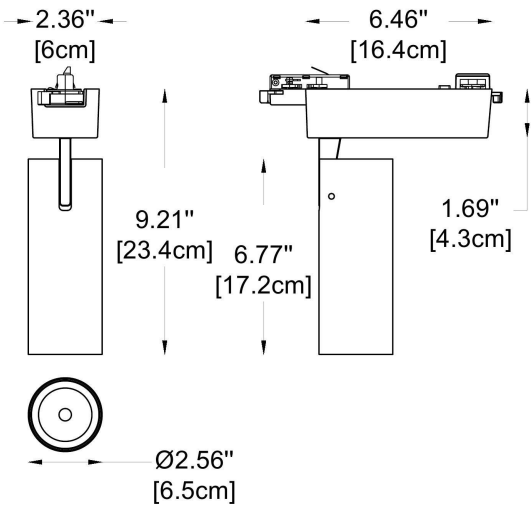

HOW TO ORDER:

CODE:

Example:
CODE: BY-50-TR-1-01-BL-65070-03-K30-C80-B1-WL

BY-50-TR-
BL1-01-65070-0
1-K30-C80-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65070-02
 Dimensions: Ø: 2.56" (6.5 cm) x H: 6" (23.4 cm)
 Housing: AL. Extrude, Electrostatic Powder Coating
 Reflector: PC (Vacuum Coating)
 Light Source: LED (COB)
 Power: 28W
 Output Current 350 mA

CCT: -K30 - 3000K
 -K40 - 4000K
 -K50 - 5000K


CRI: -C80 - 80
 -C90 - 90

Beam Angle and lumens: -B1 - 25.1° = 2583 lm
 -B2 - 35.1° = 2555 lm

Finish options: -WL - White
 -BL - Black

Operating temperature range - -20 to +40°C
 Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

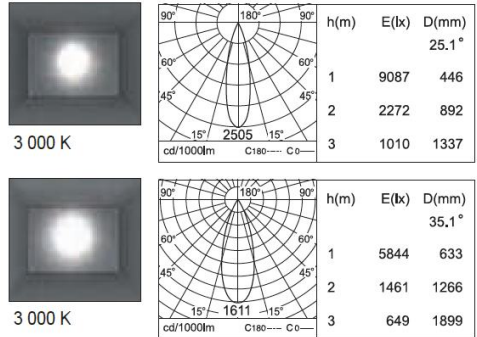

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:
CODE: BY-50-TR-1-01-BL-65070-03-K30-C80-B1-WL

CODE:

BY-50-TR-
BL1-01-65070-0
1-K30-C80-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65070-02
 Dimensions: Ø: 3.27" (8.3 cm) x H: 6.5" (16.5 cm)
 Housing: AL. Extrude, Electrostatic Powder Coating
 Reflector: Lens
 Light Source: LED (COB)
 Power: 23W
 Output Current 600 mA

CCT: -K30 - 3000K
 -K40 - 4000K
 -K50 - 5000K



CRI: -C80 - 80
 -C90 - 90

Beam Angle and lumens: -B1 - 20.1° = 2513 lm
 -B2 - 35.1° = 2536 lm
 -B3 - 46.3° = 2593 lm

Finish options: -WL - White
 -BL - Black

Operating temperature range - -20 to +40°C
 Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

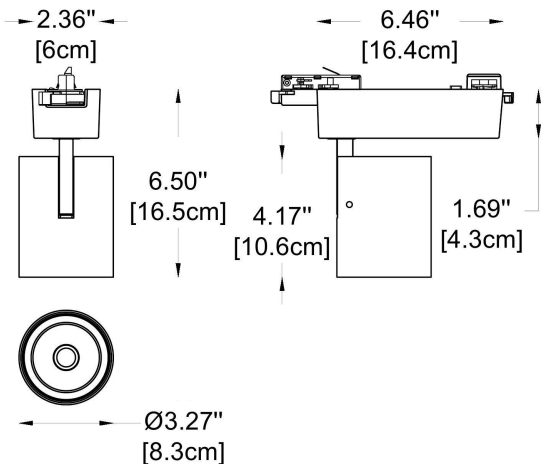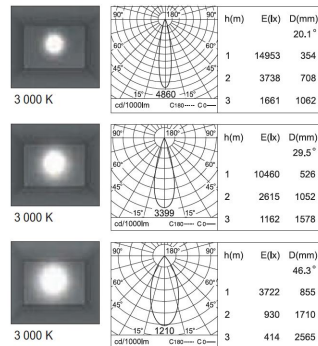

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE




WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com
www.byiba.com
 1 877-964-4646

ACCESSORIES FOR 1 CIRCUIT TRACK:


-105
Feed-in Cap
 -BL - Black
 -WH - White

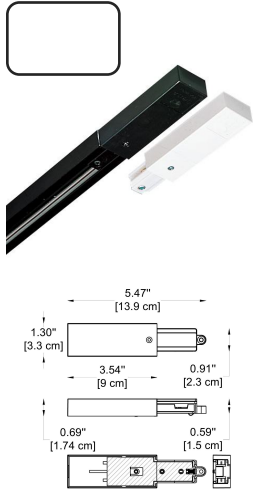


-106
End Cap
 -BL - Black
 -WH - White

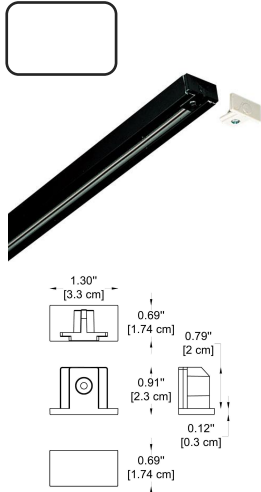


-107
Straight Connector
 -BL - Black
 -WH - White

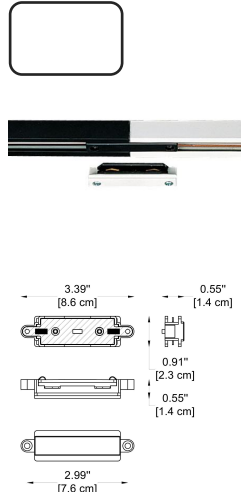


-108
L Connector
 -BL - Black
 -WH - White

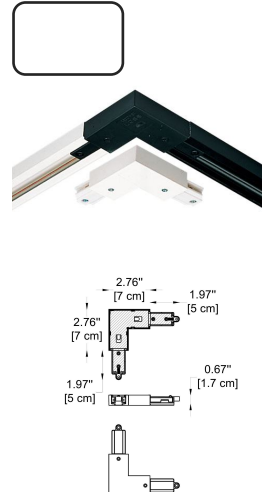

-110
T Connector
 -BL - Black
 -WH - White

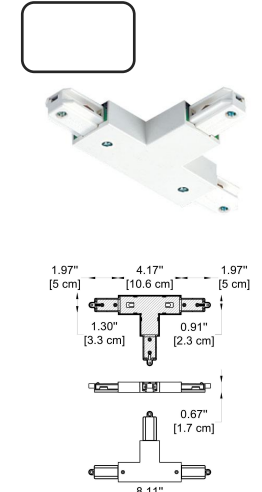

-111
X Connector
 -BL - Black
 -WH - White

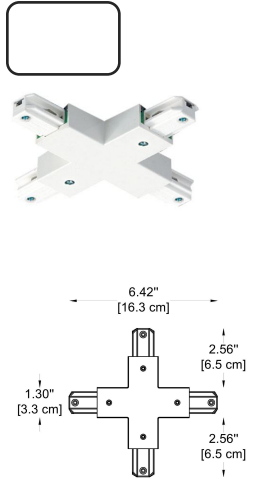

-153
Adapter
 -BL - Black
 -WH - White




HOW TO ORDER:


Example:
 CODE: 105-WH

ACCESSORIES FOR 3CIRCUIT TRACK:


-305
Feed-in Cap
 -BL - Black
 -WH - White

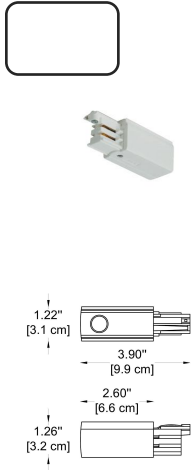


-306
End Cap
 -BL - Black
 -WH - White

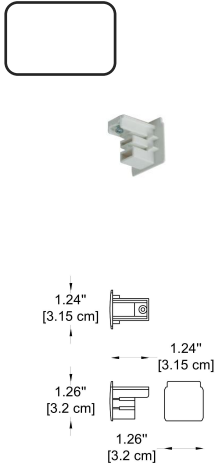


-307
Straight Connector
 -BL - Black
 -WH - White

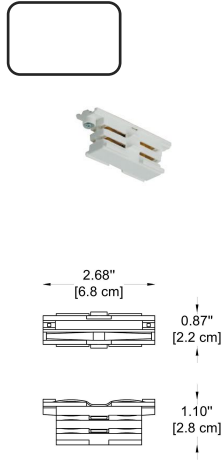


-308
L Connector
 -BL - Black
 -WH - White

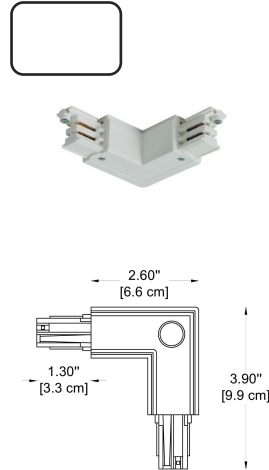


-310
T Connector
 -BL - Black
 -WH - White

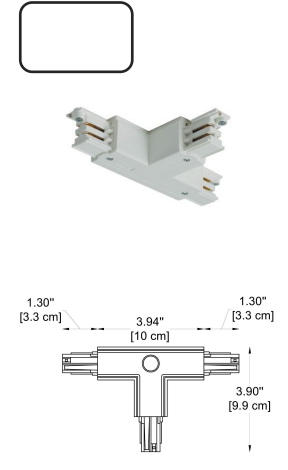

-311
X Connector
 -BL - Black
 -WH - White

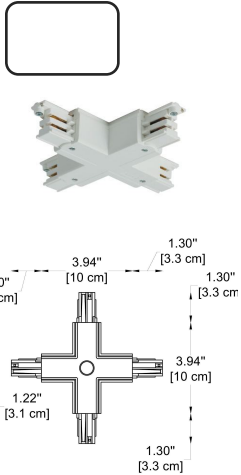

-351
Adapter
 -BL - Black
 -WH - White

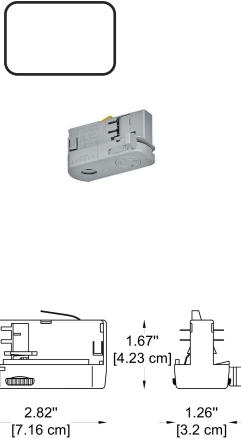

HOW TO ORDER:

Example:
 CODE: -305-BL

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



CONTACT US:

sales@gordonbullard.com
www.byiba.com
 1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS