

DEKO FRAME (wall)

BY-DF-ARC



PROJECT

SPEC TYPE

NOTES





GENERAL INFORMATION:

The DEKO FRAME (wall) is a decorative lighting fixture designed for both aesthetic and functional applications. Constructed from durable Porokast material with a natural finish, it features integrated LED lighting, remote driver positioning, and operates on 110–277V with an IP20 rating. It offers a high color rendering index (CRI 90) and functions in temperatures ranging from -4°F to 122°F. Available in multiple sizes (S to XL) and beam angles (60° or 120°), it supports various light outputs, CCTs (ranging from 2400K to 5000K), dimming options (0-10V, DALI, Lutron, Casambi, Wi-Fi), and custom finishes upon request.

MATERIAL:

Porotex

FINISHING:

Natural

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

IP RATING:

 2Δ

DRIVER POSITION:

Remote

CRI:

CRI 90

OPERATING TEMPERATURE:

Ta min: -4°F to Ta max: +122°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL OUTDOOR

DECORATIVE




CONTACT US:

sales@gordonbullard.com www.byiba.com 1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS



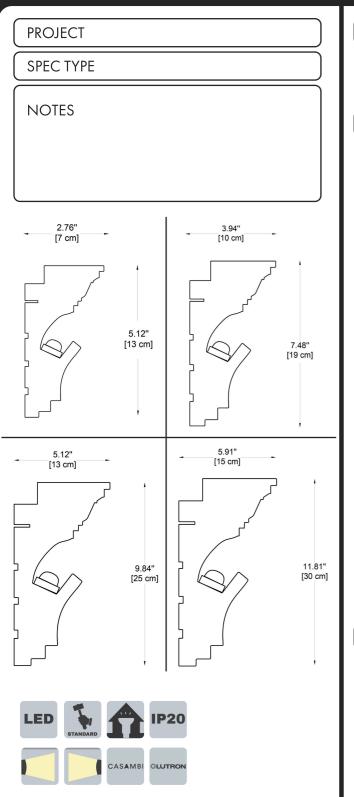

HOW TO ORDER:

Example:

CODE: BY-DF-ARC-S-BL1-B6-L1-K28-DIM-NT

CODE:

BY-DF-ARC-S-BL1-B6-L1-K28-DIM-NT

1 MODELS:

-S

DIMENSIONS:

A) Height - H: 2.76" (7 cm) B) Width - W: 5.1" (13 cm)

-M

DIMENSIONS:

A) Height - H: 7.5" (19 cm) B) Width - W: 3.94" (10 cm)

-L

DIMENSIONS:

A) Height - H: 9.84" (25 cm) B) Width - W: 5.12" (13 cm)

-XL

DIMENSIONS:

A) Height - H: 11.8" (30 cm) B) Width - W: 5.91" (15 cm)

2 BODY LENGHT:

11.8" (30 cm) -BL1 L: -BL2 L: 19.7" (50 cm) 39.4" (100 cm) -BL3 L: 59" (150 cm) -BL4 L: 78.7" (200 cm) -BL5 L: -CUS Custom on request*

WWW.BULLARDCOLLECTION.COM

TECHNICAL OUTDOOR


<u>DECORATIVE</u>



CONTACT US:

sales@gordonbullard.com www.byiba.com 1 877-964-4646



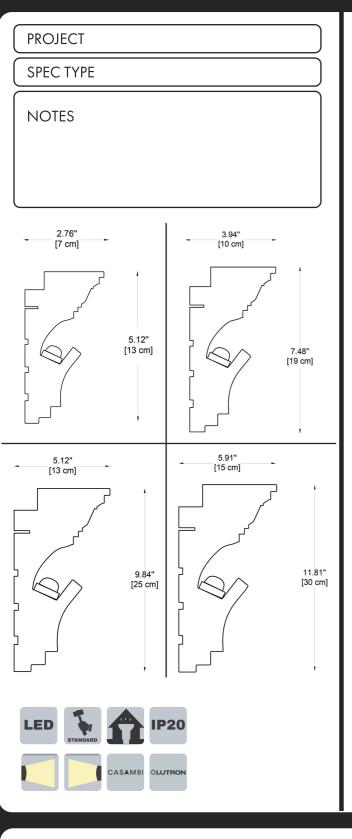

HOW TO ORDER:

CODE:

Example:

CODE: BY-DF-ARC-S-BL1-B6-L1-K28-DIM-NT

BY-DF-ARC-S-BL1-B6-L1-K28-DIM-NT

3 BEAM ANGLE:

-**B6** 60° 120°

4 LIGHT SOURCE:

-L1 LED / 3W per ft. / 110-277V / 25,75 lm per W

-L2 LED / 4,2W per ft. / 110-277V / 30 lm per W

-L3 LED RGB / 4,2W per ft. / 110-277V

-L4 LED / 5,8W per ft. / 110-277V / 32 lm per W

5 CCT:

-K24 2400K

-K28 2800K

-K35 3500K

-K45 4500K

-K50 5000K

6 DIMMING OPTIONS:

-DIM 0-10V

-DALI DALI

-LT Lutron

-CS Casambi

-WF WI-FI

-NON Non-Dimmable

7 FINISH OPTIONS:

-NT Natural

-CUS Custom on request*

WWW.BULLARDCOLLECTION.COM

<u>TECHNICAL</u>

<u>OUTDOOR</u>

<u>DECORATIVE</u>



CONTACT US:

sales@gordonbullard.com www.byiba.com 1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS