

LST
(linear)

BY-LST-ARC

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The LST is a minimalist, high-performance linear lighting system tailored for contemporary interiors. Its sleek form allows it to disappear into the architecture, delivering clean lines of light that enhance spaces without dominating them. Whether recessed, surface-mounted, or suspended, LST adapts seamlessly to various installation needs. Engineered with high-efficiency LEDs, it offers bright, uniform illumination while maintaining low energy consumption. Its modular design supports endless configurations, making it ideal for offices, retail, museums, or residential projects.

MATERIAL:

Aluminum + Extruded silicon

FINISHING:

Natural Aluminum

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

IP RATING:

68

DRIVER POSITION:

Remote

CRI:

CRI 90

OPERATING TEMPERATURE:

Ta min: -4°F to Ta max: +122°F

LIGHTING DISTRIBUTION:

120°

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com




www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

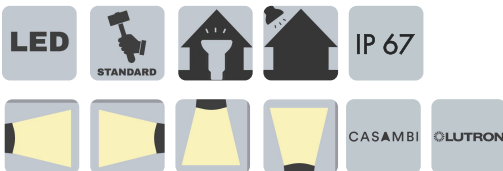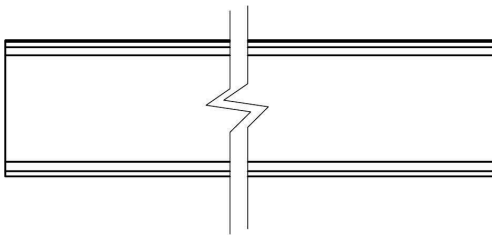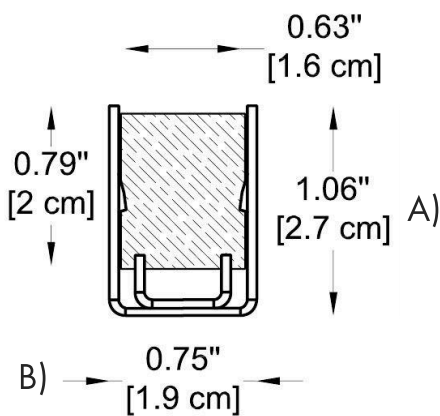

HOW TO ORDER:

Example:
CODE: BY-LST-ARC-BL1-K30-DIM

CODE:

BY-LST-ARC-
BL1-K30-DIM

1 BODY LENGTH:

-BL1	L:	11.8" (30 cm)
-BL2	L:	19.7" (50 cm)
-BL3	L:	39.4" (100 cm)
-BL4	L:	59" (150 cm)
-BL5	L:	78.7" (200 cm)
-CUS	L:	Custom on request*

2 BODY HEIGHT & WIDTH:

A) H: 1,06" (2,7 cm) x B) W: 0,75" (1,9 cm)

3 LIGHT SOURCE:

LED | 3 W/ft | 110-277V | CRI 90


4 CCT & LUMENS:

-K30	3000K = 190 lm/ft
-K40	4000K = 212 lm/ft
-K50	5000K = 230 lm/ft

5 DIMMING OPTIONS:

-DIM	0-10V
-DALI	DALI
-LT	Lutron
-CS	Casambi
-WF	WI-FI
-NON	Non-Dimmable

6 PHOTOMETRIC:



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

HOW TO ORDER:


Example:
CODE: BY-LST-ARC-BL1-K30-DIM

CODE:

BY-LST-ARC-
BL1-K30-DIM


7

ACCESSORIES: (optional)




-AC1

Direct entry connector



-AC2

Side entry connector



-AC3

Bottom entry connector




-AC5

Direct entry connector



-AC6

Side entry connector



-AC7

Bottom entry connector

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

HOW TO ORDER:

CODE:


Example:

CODE: BY-LST-ARC-BL1-K30-DIM

BY-LST-ARC-BL1-K30-DIM

7

ACCESSORIES: (optional)



-AC8

Aluminum profile

Standard length:

1,37" / 39,37" / 78,74"

Installation Way:



Surface-Mounted



Recessed



-AC11

Aluminum profile

Standard length:

1,37" / 39,37" / 78,74"


Installation Way:



Surface-Mounted



Recessed



-AC9

Aluminum profile

Standard length:

1,37" / 39,37" / 78,74"


Installation Way:



Surface-Mounted



Recessed



-AC12

Aluminum profile

Standard length:

1,37" / 39,37" / 78,74"


Installation Way:



Surface-Mounted



Recessed



-AC10

Flexible aluminum profile

Standard length:

19,68" / 39,37"

Installation Way:



Surface-Mounted



-AC13

Plastic profile

Standard length:

39,37"

Installation Way:



Surface-Mounted



Recessed

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

HOW TO ORDER:


Example:
CODE: BY-LST-ARC-BL1-K30-DIM

CODE:

BY-LST-ARC-
BL1-K30-DIM

7

ACCESSORIES: (optional)




-AC14 Plastic clip

Standard length:
1,18"

Installation Way:



Surface-Mounted




-AC17 Plastic profile

Standard length:
1,37" / 39,37" / 78,74"

Installation Way:



Surface-Mounted



-AC15 Stainless steel clip

Standard length:
2"


Installation Way:



Surface-Mounted



Recessed



-AC18 Stainless steel flexible profile

Standard length:
3,9" / 11,8" / 78,74" / 39,4"

Installation Way:



Surface-Mounted



-AC16 Stainless steel profile

Standard length:
39,4"

Installation Way:



Surface-Mounted



Recessed

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646