

TWIN  
(pendant)

BY-51100-02-P

PROJECT

SPEC TYPE

NOTES



LED



IP20



2.0 kg

## GENERAL INFORMATION:

Our modern and minimalist pendant lighting fixtures come in two models (small and big), offering versatile lighting solutions for contemporary interiors. Crafted with precision, these fixtures feature shades made from aluminum via spinning processing and finished with electrostatic powder coating. The gear box is constructed from die-cast aluminum with electro powder coating, and the reflector is anodized specular silver aluminum.

## MATERIAL:

SHADE - AL. Spinning Processing, Electrostatic Powder Coating

GEAR BOX - AL. Die-Casting, Electro Powder Coating

REFLECTOR - AL. Anodized Specular Silver

## FINISHING:

White, Black, Grey

## LIGHTING:

SMD (55 LED)

## INPUT VOLTAGE:

110-277V

## IP RATING:

20

## OPERATING TEMPERATURE RANGE:

-20 to +40 C

## WIRE:

STS / PVC

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


[sales@gordonbullard.com](mailto:sales@gordonbullard.com)[www.byiba.com](http://www.byiba.com)

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

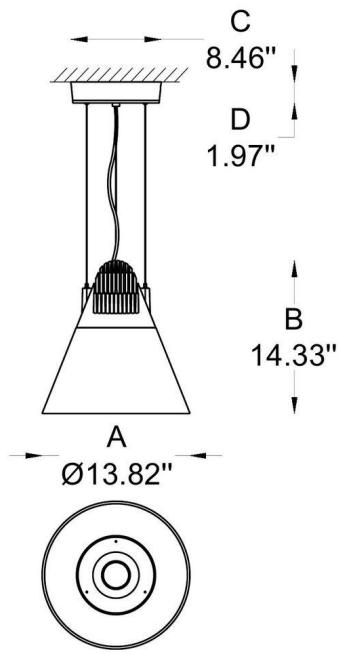

## HOW TO ORDER:

Example:

CODE: BY-51100-02-P-19W-K30-80-BL-RE

CODE:

BY-51100-02-P-19W-K30-80-BL-RE

## 1 DIMENSIONS:

- A) Diameter- Ø: 13.8" (35 cm)
- B) Height - H: 14.3" (36.3 cm)
- C/D) Canopy - L: 8.45" (21.45 cm) x H: 2" (5.1 cm)

## 2 LIGHT SOURCE:

- 19W LED - 19W - 500 mA - 1 980 lm
- 27W LED - 27W - 700 mA - 2 680 lm

## 3 CCT SPECIFY:

- K30 3000K
- K40 4000K

## 4 CRI:

- 80 CRI 80
- 90 CRI 90

## 5 FINISH OPTIONS:


- BL Black
- GR Grey
- WH White

## 6 DRIVER POSITION:


- RE Remove

## 7 PHOTOMETRICS:

BY-51100-02-P (19W)



BY-51100-02-P (27 W)

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)[www.byiba.com](http://www.byiba.com)

1 877-964-4646