



BLUFF IN
(ceiling-mounted)

BY-4110-PL

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The BYIBA Bluff In is a recessed ceiling lamp crafted from CRISTALY®, featuring a modern design with a glass diffuser that emits a soft, diffused light suitable for various indoor applications. This handmade Italian luminaire has a circular recessed hole with a smooth edge. It is available with different integrated LED options, typically around 6.5W or 13W, with various color temperatures such as 2700K, 3000K, or 4000K, and corresponding lumen outputs. The lamp requires a driver that is installed in the counter ceiling and is not included. Depending on the driver used, dimming may be possible. It generally has an IP20 or IP44 rating, making it suitable for dry or humid indoor environments.

MATERIAL:

CRISTALY® (Paintable)

FINISHING:

White

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

IP RATING:

IP20/IP44

DRIVER POSITION:

Remote

INSULATION CLASS:

III

CRI:

CRI 90



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com




www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

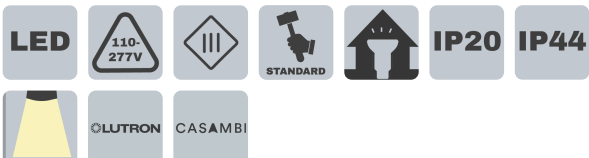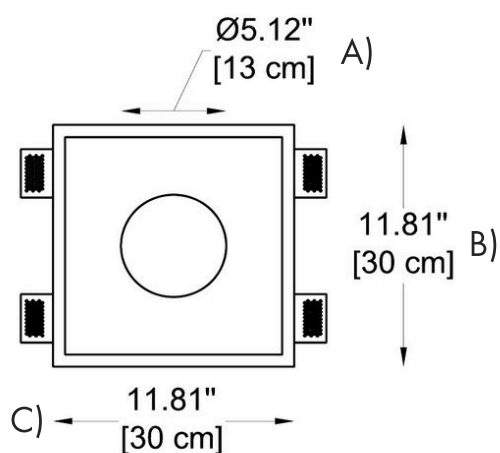

HOW TO ORDER:

Example:
CODE: BY-4110-PL-L1-K40-IP2-DALI

CODE:

BY-4110-PL
-L1-K40-IP2-
DALI

1 DIMENSIONS:

- A) Diameter - Ø: 5.12" (13 cm)
- B) Height - H: 11.81" (30 cm)
- C) Length - L: 11.81" (30 cm)
- D) Depth - P: 5.31" (13.5 cm)

2 LIGHT SOURCE:

- L1 LED / 6,5W / 110-277V / CRI 90 / 350mA
- L2 LED / 13W / 110-277V / CRI 90 / 700mA

3 CCT and LUMENS:

- K27 2700K = 800 lm
 - K30 3000K = 850 lm
 - K40 4000K = 900 lm
- FOR L1 MODEL
- KK27 2700K = 1500 lm
 - KK30 3000K = 1600 lm
 - KK40 4000K = 1700 lm
- FOR L2 MODEL

4 IP RATING:

- IR2 IP20
- IR4 IP44

5 DIMMING OPTIONS:

- DIM 0-10V
- DALI DALI
- LT Lutron
- CS Casambi
- WF WI-FI
- NON Non-Dimmable

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646