




SILVANO (down-lights)

BY-SLV-DL

PROJECT

SPEC TYPE

NOTES

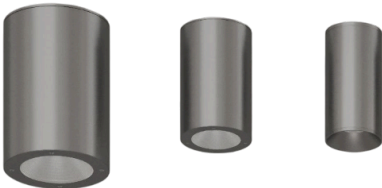

GENERAL INFORMATION:

Ceiling-mounted cylindrical luminaire made of high-quality stainless steel, available in mirrored or brushed finish. Designed for modern residential, commercial, or public interiors, it offers both accent and general lighting solutions. The luminaire supports a wide power range from 5W to 30W, making it adaptable for various lighting needs. Available in multiple diameters and heights, it can be customized to suit different ceiling heights and spatial requirements. Beam angles include 12°, 24°, 36°, and 60°, allowing for precise light distribution. Compatible with various LED modules, this fixture combines durability, minimalist aesthetics, and functional performance in a sleek, contemporary design.

MATERIAL:

Stainless Steel

FINISHING:

Stainless Steel

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

BEAM ANGLE:

12° / 24° / 36° / 60°

IP RATING:

IP 20 / IP 65

OPERATING TEMPERATURE RANGE:

-10 to +45 C

APPLIANCE CLASS:

I

DRIVER POSITION:

Remote

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com
www.byiba.com
 1 877-964-4646

PROJECT

SPEC TYPE

NOTES

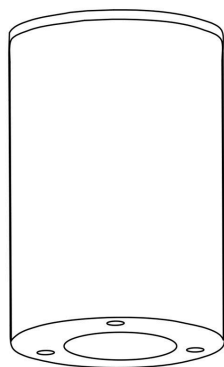

Variable

Ø3.94"
[10 cm]

LED



IP20

IP65

CASAMBI

CLUTRON

HOW TO ORDER:

Example:

CODE: BY-SLV-DL-P66-H1-W5-B12-K30-C80-DL-BR

CODE:

BY-SLV-DL-P66-
H1-W5-B12-
K30-C80-DL-BR

1

MODELS:

GENERAL INFORMATION

CODE - P66

Material:	Aluminum	Driver:	Remote
Light Source:	LED / 110-277V	Driver type:	Electronic
Lighting type:	Direct	Emergency:	Without
Optical type:	Spot	Insulation class:	I

Diameter: H: 3.94" (10 cm)

Height -
-H1 - H: 3.94" (10 cm)
-H2 - H: 5.91" (15 cm)
-H3 - H: 7.87" (20 cm)

Power:
-W5 - 5W / 448lm
-W10 - 10W / 895lm
-W15 - 15W / 1232lm

Beam Angle:
-B12 - 12°
-B34 - 24°
-B48 - 36°
-B60 - 60°

CCT:
-K30 - 3000K
-K40 - 4000K
-K60 - 6000K

CRI:
-C80 - 80
-C90 - 90

Dimming Options:
-DIM - 0-10V
-DL - DALI
-TR - TRIAC
-LT - Lutron
-CS - Casambi

Finish Options:
-MR - Mirrored
-BR - Brushed

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

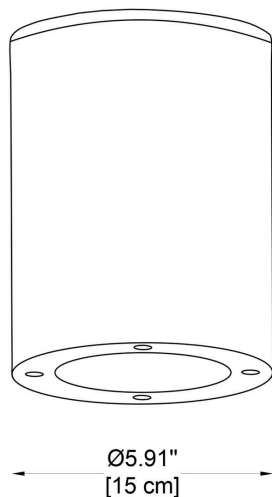

Variable

LED



IP20

IP65

CASAMBI

CLUTRON

HOW TO ORDER:

CODE:

Example:

CODE: BY-SLV-DL-P67-H2-W15-B34-K40-C80-DL-BR

BY-SLV-DL-P67-
H2-W15-B34-
K40-C80-DL-BR

1

MODELS:

GENERAL INFORMATION

CODE - P67

Material:	Aluminum	Driver:	Remote
Light Source:	LED / 110-277V	Driver type:	Electronic
Lighting type:	Direct	Emergency:	Without
Optical type:	Spot	Insulation class:	I

Diameter: H: 5.91" (15 cm)

Height -
-H1 - H: 5.91" (15 cm)
-H2 - H: 7.87" (20 cm)
-H3 - H: 11.81" (30 cm)

Power:
-W15 - 15W / 1556lm
-W20 - 20W / 2039m
-W30 - 30W / 3058lm

Beam Angle:
-B12 - 12°
-B34 - 24°
-B48 - 36°
-B60 - 60°

CCT:
-K30 - 3000K
-K40 - 4000K
-K60 - 6000K

CRI:
-C80 - 80
-C90 - 90

Dimming Options:
-DIM - 0-10V
-DL - DALI
-TR - TRIAC
-LT - Lutron
-CS - Casambi

Finish Options:
-MR - Mirrored
-BR - Brushed

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

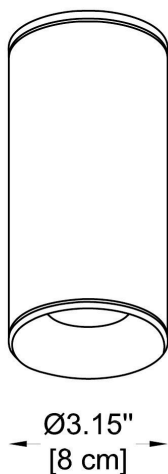

Variable

LED



IP20

IP65

CASAMBI

CLUTRON

HOW TO ORDER:

CODE:

Example:

CODE: BY-SLV-DL-P69-H2-W10-B34-K40-C80-DIM-MR

BY-SLV-DL-P69-
H2-W10-B34-
K40-C80-DIM-
MR

1

MODELS:

GENERAL INFORMATION

CODE - -P69

Material:	Aluminum	Driver:	Remote
Light Source:	LED / 110-277V	Driver type:	Electronic
Lighting type:	Direct	Emergency:	Without
Optical type:	Spot	Insulation class:	I

Diameter: H: 3,15" (8 cm)

Height -
-H1 - H: 4,72" (12 cm)
-H2 - H: 5,91" (15 cm)
-H3 - H: 7,87" (20 cm)

Power:
-W5 - 5W / 554lm
-W10 - 10W / 1112lm
-W15 - 15W / 1508lm

Beam Angle:
-B12 - 12°
-B34 - 24°
-B48 - 36°
-B60 - 60°

CCT:
-K30 - 3000K
-K40 - 4000K
-K60 - 6000K

CRI:
-C80 - 80
-C90 - 90

Dimming Options:
-DIM - 0-10V
-DL - DALI
-TR - TRIAC
-LT - Lutron
-CS - Casambi

Finish Options:
-MR - Mirrored
-BR - Brushed

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

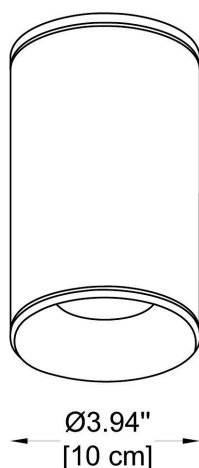

Variable

LED



IP20

IP65

CASAMBI

CLUTRON

HOW TO ORDER:

Example:
CODE: BY-SLV-DL-P70-H2-W15-B34-K40-C90-DL-MR

CODE:

BY-SLV-DL-P70-
H2-W15-B34-
K40-C90-DL-MR

1

MODELS:

GENERAL INFORMATION

CODE - -P70

Material:	Aluminum	Driver:	Remote
Light Source:	LED / 110-277V	Driver type:	Electronic
Lighting type:	Direct	Emergency:	Without
Optical type:	Spot	Insulation class:	I

Diameter: H: 3.94" (10 cm)

Height -
-H1 - H: 4.72" (12 cm)
-H2 - H: 5.91" (15 cm)
-H3 - H: 7.87" (20 cm)

Power:
-W15 - 5W / 577lm
-W20 - 10W / 1152lm
-W30 - 15W / 1625lm

Beam Angle:
-B12 - 12°
-B34 - 24°
-B48 - 36°
-B60 - 60°

CCT:
-K30 - 3000K
-K40 - 4000K
-K60 - 6000K

CRI:
-C80 - 80
-C90 - 90

Dimming Options:
-DIM - 0-10V
-DL - DALI
-TR - TRIAC
-LT - Lutron
-CS - Casambi

Finish Options:
-MR - Mirrored
-BR - Brushed

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

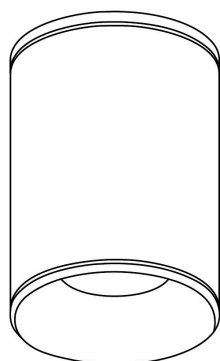

Ø4.72"
[12 cm]

Variable

LED



IP20

IP65

CASAMBI

LUTRON

HOW TO ORDER:

Example:

CODE: BY-SLV-DL-P71-H1-W15-B34-K40-C90-DIM-MR

CODE:

BY-SLV-DL-P71-
H1-W15-B34-
K40-C90-DIM-
MR

1

MODELS:

GENERAL INFORMATION

CODE - -P71

Material:	Aluminum	Driver:	Remote
Light Source:	LED / 110-277V	Driver type:	Electronic
Lighting type:	Direct	Emergency:	Without
Optical type:	Spot	Insulation class:	I

Diameter: H: 4,72" (12 cm)

Height - -H1 - H: 5.91" (15 cm)
-H2 - H: 7.87" (20 cm)

Power: -W10 - 10W / 1182lm
-W15 - 15W / 1643lm
-W20 - 20W / 2185lm
-W25 - 25W / 2578lm

Beam Angle: -B12 - 12°
-B34 - 24°
-B48 - 36°
-B60 - 60°

CCT: -K30 3000K
-K40 4000K
-K60 6000K

CRI: -C80 - 80
-C90 - 90

Dimming Options: -DIM - 0-10V
-DL - DALI
-TR - TRIAC
-LT - Lutron
-CS - Casambi

Finish Options: -MR - Mirrored
-BR - Brushed

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

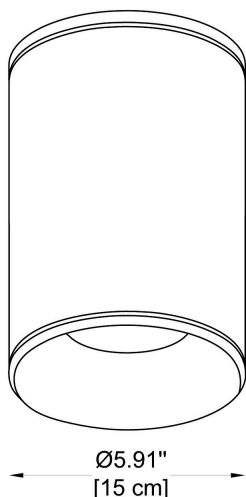

Variable

LED



IP20

IP65

CASAMBI

LUTRON

HOW TO ORDER:

Example:

CODE: BY-SLV-DL-P72-H2-W20-B48-K40-C80-DIM-BR

CODE:

BY-SLV-DL-P72-
H2-W20-B48-
K40-C80-DIM-
BR

1

MODELS:

GENERAL INFORMATION

CODE - P72

Material:	Aluminum	Driver:	Remote
Light Source:	LED / 110-277V	Driver type:	Electronic
Lighting type:	Direct	Emergency:	Without
Optical type:	Spot	Insulation class:	I

Diameter: H: 5.91" (15 cm)

Height -	-H1 -	H: 5.91" (15 cm)	
	-H2 -	H: 7.87" (20 cm)	
	-H3 -	H: 11.81" (30 cm)	

Power:	-W15 -	15W / 1723lm	
	-W20 -	20W / 2335lm	
	-W30 -	30W / 3508lm	

Beam Angle:	-B12 -	12°	
	-B34 -	24°	
	-B48 -	36°	
	-B60 -	60°	

CCT:	-K30	3000K	
	-K40 -	4000K	
	-K60 -	6000K	

CRI:	-C80 -	80	
	-C90 -	90	

Dimming Options:	-DIM -	0-10V	
	-DL -	DALI	
	-TR -	TRIAC	
	-LT -	Lutron	
	-CS -	Casambi	

Finish Options:	-MR -	Mirrored	
	-BR -	Brushed	

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646