




MILLI ROUND (ceiling-mounted/wall)

BY-4194-9010

PROJECT

SPEC TYPE

NOTES

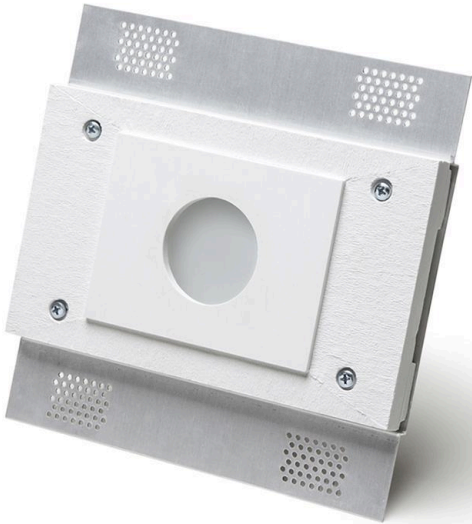

GENERAL INFORMATION:

The MILLI ROUND is a sleek and essential recessed spotlight crafted to fit tight installation spaces without compromising on light quality. Slim, precise and elegant, the is designed to be both functional and visually subtle. If you need a recessed light that blends seamlessly into architecture, while offering high-quality light and strong build integrity, the is an excellent choice. Its slim profile makes it ideal for modern interiors, where minimalism and functionality go hand in hand. The stable fixing system and quality materials mean it will perform reliably even in more challenging situations.

MATERIAL:

CRISTALY®

FINISHING:

White / Paintable

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

IP RATING:

IP 20 / IP 44

INSULATION CLASS:

III

DRIVER POSITION:

Remote

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

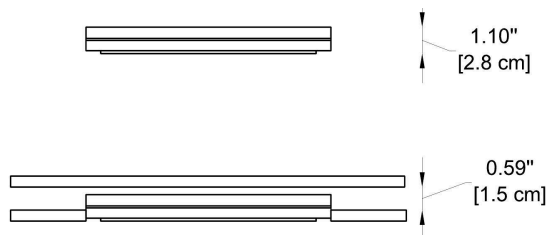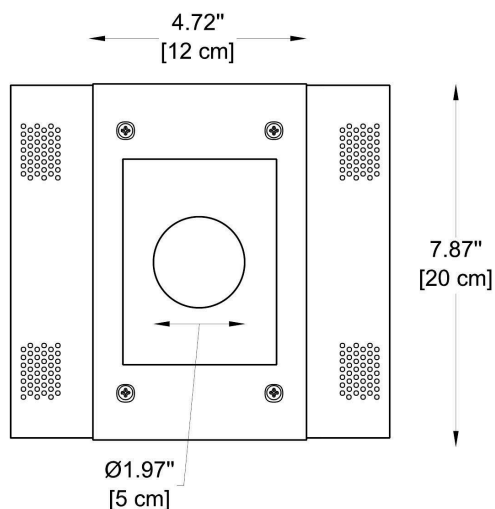

HOW TO ORDER:

Example:

CODE: BY-4194-9010-L1-K27-P20-DIM

CODE:

BY-4194-9010-L1-K27-P20-DIM

1 DIMENSIONS:

- A) Width - W: 1.10" (2.8 cm)
- B) Length - L: 4.72" (12 cm)
- C) Height - H: 7.87" (20 cm)

2 LIGHT SOURCE:

- L1 LED / max. 6.5W / 110-277V / CRI 90
- L2 LED / max. 13W / 110-277V / CRI 90

3 CCT and LUMENS:

- | | | |
|-------|-----------------|-----------------------|
| -K27 | 2700K = 800 lm | } for L1 model |
| -K30 | 3000K = 850 lm | |
| -K40 | 4000K = 900 lm | |
| -KK27 | 2700K = 1500 lm | } for L2 model |
| -KK30 | 3000K = 1600 lm | |
| -KK40 | 4000K = 1700 lm | |

4 IP RATING:

- P20 IP 20
- P44 IP 40

5 DIMMING OPTIONS:

- DIM 0-10V
- DALI DALI
- LT Lutron
- CS Casambi
- NON Non-Dimmable

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646