




MILLI ROUND

INSTALLATION TYPE:
CEILING - MOUNTED / WALL

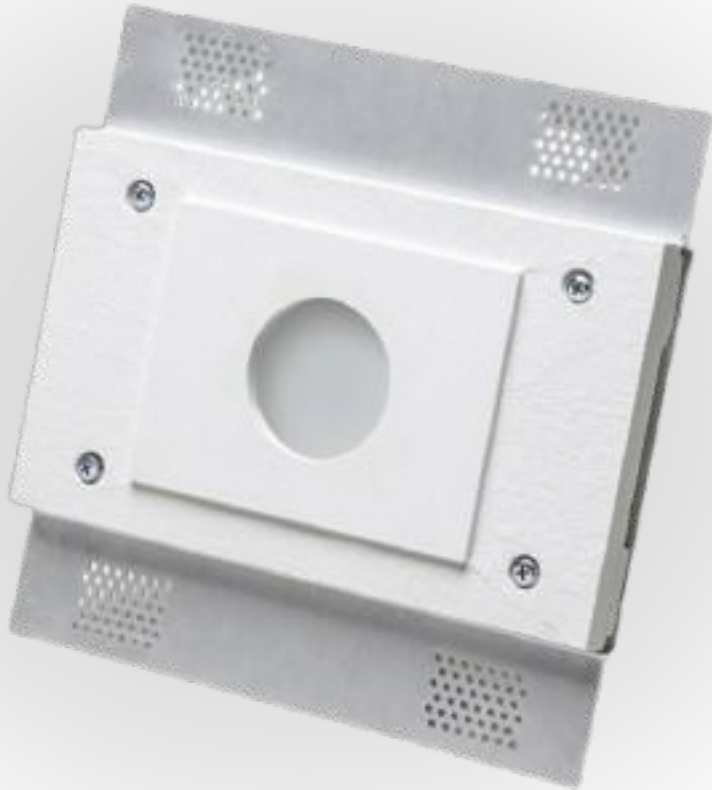

025.409 (REV05)

MADE IN ITALY

4193

4193B

4193C

4193D

4193E

4193F

4193G

4194

4194B

LED:

6.5W 350 mA

13W 700 mA

8W 350 mA

16W 700 mA

32W 700mA

III

IP 20/ IP44

C.C.

[m.A.]

NO!

X

1

Art.	4193	4193B	4193C	4193D	4193E	4193F	4193G	4194	4194B
4.9" x 8.1"	8.1" x 10.0"	8.1" x 10.0"	11.6" x 10.0"	11.6" x 10.0"	10.0" x 8.1"	11.6" x 10.0"	4.9" x 8.1"	8.1" x 10.0"	
0.59"	0.59"	0.59"	0.59"	0.59"	0.59"	0.59"	0.59"	0.59"	

Terminal block is not included.

For the installation qualified personnel may be required. (we recommend MAMMUT/FORBOX 0.0023in²)

3a for 4193- 4194

UP

3b for 4193B-4193C-4193D-4193E-4194B

4

5

6

7

8

P.2

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

ETL

LISTED

US

991 South Gull Lake Dr.


Richland, MI 49083

USA


Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Comany 2025 All Rights Reserved

FOR INSTALLATION IN 0.59"



* Art.	Size	Depth
4193	4.9" x 8.1"	0.59"
4193B	8.1" x 10.0"	0.59"
4193C	8.1" x 10.0"	0.59"
4193D	11.6" x 10.0"	0.59"
4193E	11.6" x 10.0"	0.59"
4194	4.9" x 8.1"	0.59"
4194B	8.1" x 10.0"	0.59"

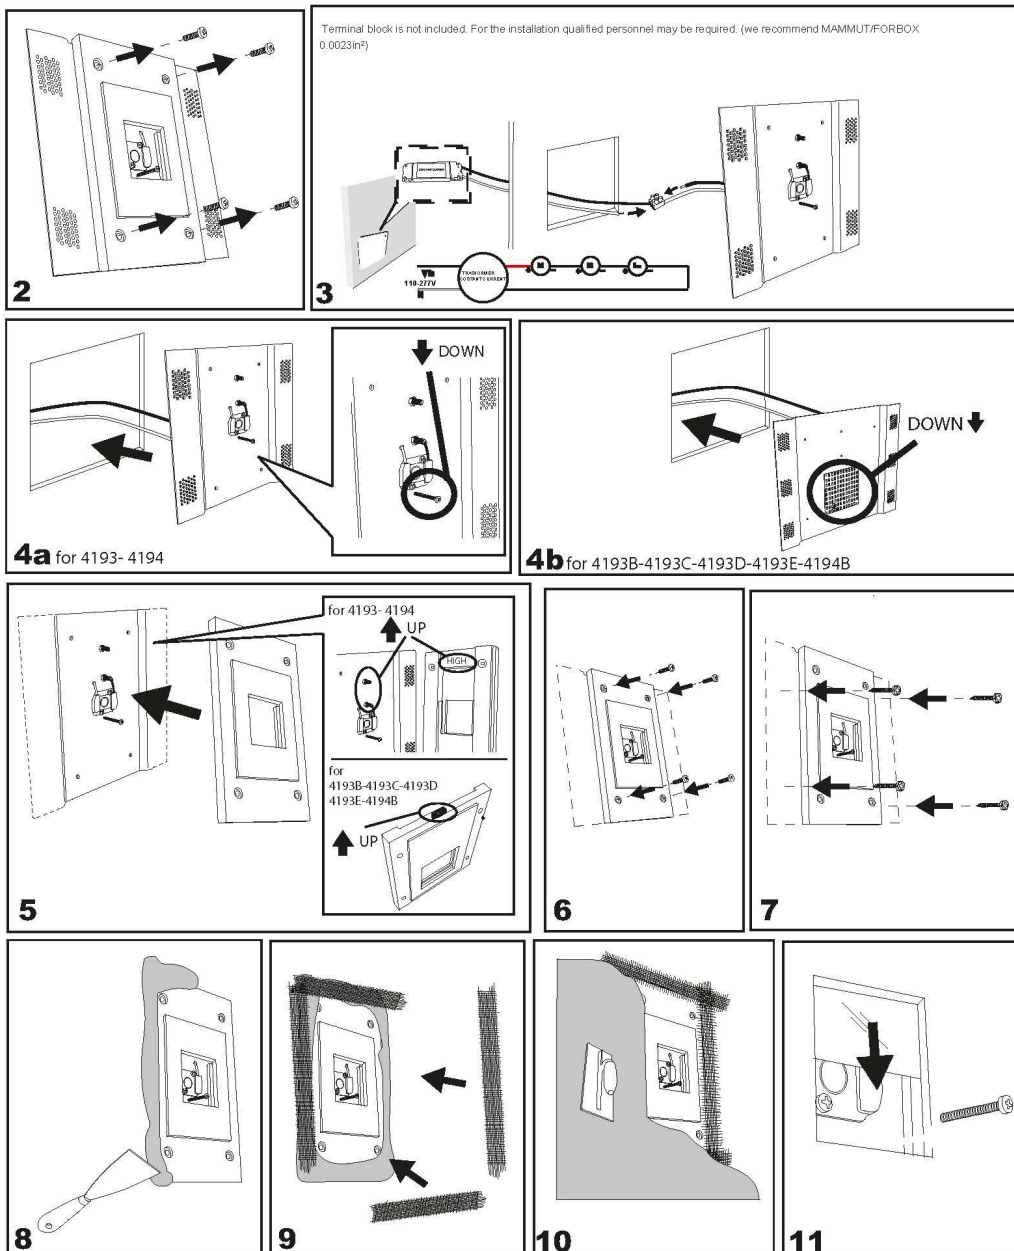



IMPORTANT

To ensure equipment safety you must carefully follow the instructions below. This leaflet must be kept handy by personnel entrusted with all ordinary and extraordinary maintenance.

- Before any installation or maintenance operation on the bulb, make sure it is disconnected from power
- Fit the correct bulbs, according to the type and power indicated on the lamp data label.
- Make sure the lamp technical features are compatible with the use you are going to make of it.
- Should you have any doubt, refer to the dealer or ask an electrician.
- When connecting to the mains, follow the correct colour code for power cables: (N) blue, (L) brown or black and, only for class I equipment, (T) yellow/green.
- When lamps are to be fitted to the wall directly through their ceramic parts, fasten the fixing screws lightly, to avoid breaking the ceramic.
- To clean the lamp on the outside, use a soft cloth, possibly wet. Do not use solvents or abrasive products. No liquid must get in contact with the lamp interior parts.
- Do not touch the equipment with dirty hands.



= Class I equipment, must be connected to an earth terminal.



= Double insulated lamp, does not need earthing.



= Electrical equipment in class III, electrical safety guaranteed by low voltage tension, does not require grounding



= Minimum distance to be observed from all lit up objects.



= Replace immediately the safety glass, if damaged, with the original part.



= The lamp uses low pressure bulbs, and needs no protection glass.



= The equipment at the end of its life must be collected separately from other waste.