




RAGO SMALL

INSTALLATION TYPE:
WALL-MOUNTED

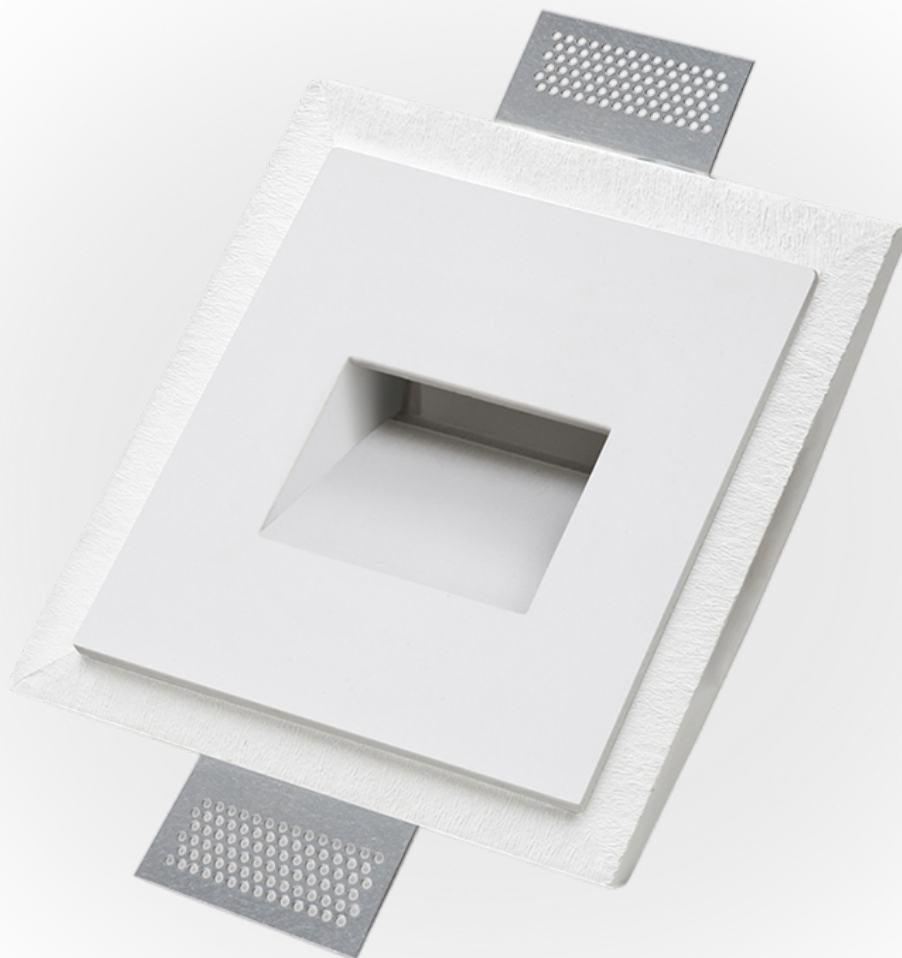

			025.553 _(REV03)		4154B 4155B
			MADE IN ITALY		
C.V. [V]	LED 1,1W 2,2W		IP 20	110-277V	

* Art.	5.512" x 5.512"	1.969"
4154B	5.512" x 5.512"	1.969"
4155B	7.874" x 5.512"	1.969"

* in

The diagram consists of four panels, numbered 5 through 8, illustrating the removal of a square object from a frame:

- Panel 5:** A square object is centered within a square frame. Dashed lines extend from the corners of the square object to the corners of the frame. Two arrows point from the corners of the square object towards the corners of the frame, indicating the direction of movement.
- Panel 6:** The square object is now slightly offset from the center of the frame. A hand is shown holding the square object, and a small white rectangular piece is visible at the bottom right corner of the square object.
- Panel 7:** The square object is further offset from the center of the frame. A hand is shown holding the square object, and a small white rectangular piece is visible at the bottom right corner of the square object.
- Panel 8:** The square object is now completely removed from the frame. A hand is shown holding the square object, and a small white rectangular piece is visible at the bottom right corner of the square object.

Diagram 10 illustrates the connection of the transformer to the power source. The transformer is shown with a primary winding connected to a 110-277V AC source and a secondary winding connected to a terminal block. A callout shows a terminal block being inserted into a wall outlet. Another callout shows a terminal block being inserted into a terminal block. A warning note states: "Terminal block is not included. For the installation qualified personnel may be required. (we recommend MAMMUT/FORBOX 0.00233 in²)".

11



IMPORTANT

To ensure equipment safety you must carefully follow the instructions below. This leaflet must be kept handy by personnel entrusted with all ordinary and extraordinary maintenance.

- Before any installation or maintenance operation on the bulb, make sure it is disconnected from power
- Fit the correct bulbs, according to the type and power indicated on the lamp data label.
- Make sure the lamp technical features are compatible with the use you are going to make of it.
- Should you have any doubt, refer to the dealer or ask an electrician.
- When connecting to the mains, follow the correct colour code for power cables: (N) blue, (L) brown or black and, only for class I equipment, (T) yellow/green.
- When lamps are to be fitted to the wall directly through their ceramic parts, fasten the fixing screws lightly, to avoid breaking the ceramic.
- To clean the lamp on the outside, use a soft cloth, possibly wet. Do not use solvents or abrasive products. No liquid must get in contact with the lamp interior parts.
- Do not touch the equipment with dirty hands.



= Class I equipment, must be connected to an earth terminal.



= Double insulated lamp, does not need earthing.



= Electrical equipment in class III, electrical safety guaranteed by low voltage tension, does not require grounding



= Minimum distance to be observed from all lit up objects.



= Replace immediately the safety glass, if damaged, with the original part.



= The lamp uses low pressure bulbs, and needs no protection glass.



= The equipment at the end of its life must be collected separately from other waste.