



AURORA
(track)

BY-ARR-TC

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The Aurora Non-Magnetic Track system includes both 1-Circuit and 3-Circuit profiles, available in lengths of 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). Operating at 110-277V, it features a durable aluminum construction with electrostatic powder coating, offered in white or black finishes.

The spotlight model measures Ø 5.75" (14.6 cm) x H 6.9" (17.6 cm) and is available in 31W or 42W options. The reflector is made of anodized specular silver, or can feature a lens. The spotlight offers CCT options of 3000K or 4000K and CRI ratings of 80 or 90, available in white, black, or gray finishes.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black, Gray

LIGHTING:

LED

VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com




www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

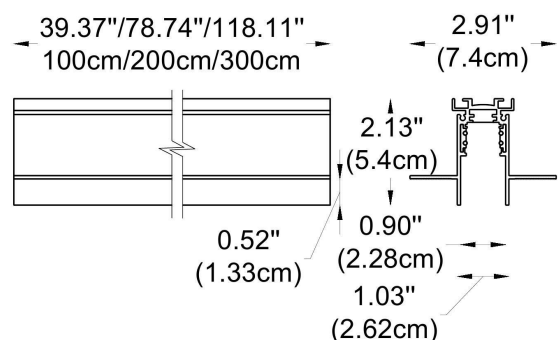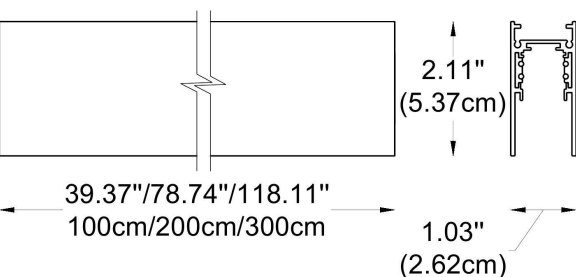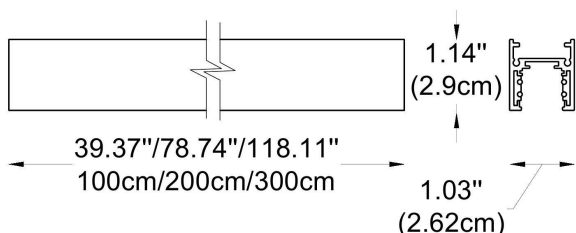

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-ARR-TC-1-01-BL

CODE FOR TRACK HEAD: 65060-02-W3-K30-C80-B1-WL


CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

BY-ARR-TC-1-01-BL

1 CHOOSE TRACK MODEL:

1-Circuit Track Profile




-1-01 L: 39.4" (100 cm)

-1-02 L: 78.7" (200 cm)

-1-03 L: 118" (300 cm)

3-Circuit Track Profile



-2-01 L: 39.4" (100 cm)

-2-02 L: 78.7" (200 cm)

-2-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

-BL Black
-WH White

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



Reflector

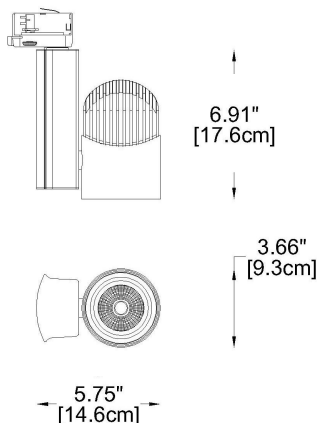

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-ARR-TC-1-01-BL

CODE FOR TRACK HEAD: 65060-02-W3-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

65060-02-W3-
K30-C80-B1-
WL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65060-02**

Dimensions: Ø: 5.75" (14.6 cm) x H: 6.9" (17.6 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: AL. Anodized Specular Silver

Gear Box: AL. Die-Casting, Electrostatic Powder Coating

Light Source: LED (COB)

Power & Currents: **-W3** - 32W / 800 mA

-W4 - 41W / 1050 mA

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle & lumens: For 32W model:

-B1 - 18.5° = 3517 lm

-B2 - 26.4° = 3411 lm

-B3 - 34.6° = 3421 lm

For 42W model:

-B1 - 18.3° = 4168 lm

-B2 - 26.4° = 4185 lm

-B3 - 34.5° = 4132 lm

Finish options: **-WL** - White

-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



Lens

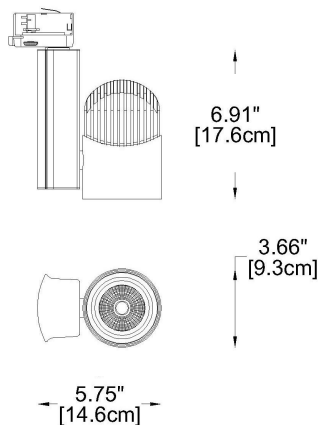

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-ARR-TC-1-01-BL

CODE FOR TRACK HEAD: 65060-02-W3-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65060-02-W3-
K30-C80-B1-
WL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65061-02

Dimensions: Ø: 5.75" (14.6 cm) x H: 6.9" (17.6 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Gear Box: AL. Die-Casting, Electrostatic Powder Coating

Light Source: LED (COB)

Power & Currents: -W3 - 32W / 800 mA

-W4 - 41W / 1050 mA

CCT: -K30 - 3000K

-K40 - 4000K

CRI: -C80 - 80

-C90 - 90

Beam Angle & lumens: For 32W model:

-B1 - 20.7° = 3517 lm

-B2 - 29.8° = 3411 lm

-B3 - 46.0° = 3421 lm

For 42W model:

-B1 - 21.0° = 4168 lm

-B2 - 29.8° = 4185 lm

-B3 - 45.9° = 4132 lm

Finish options: -WL - White

-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



Reflector



Lens



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-ARR-TC-1-01-BL

CODE FOR TRACK HEAD: 65060-02-W3-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65060-02-W3-
K30-C80-B1-
WL

PHOTOMETRICS:

FOR REFLECTOR TYPE:



h(m)	E(lx)	D(mm)
		20.7°
1	20455	365
2	5114	730
3	2273	1096



h(m)	E(lx)	D(mm)
		29.8°
1	14872	533
2	3718	1066
3	1652	1599



h(m)	E(lx)	D(mm)
		46.0°
1	5425	849
2	1356	1698
3	603	2548

FOR LENS TYPE:



h(m)	E(lx)	D(mm)
		20.7°
1	20455	365
2	5114	730
3	2273	1096



h(m)	E(lx)	D(mm)
		29.8°
1	14872	533
2	3718	1066
3	1652	1599



h(m)	E(lx)	D(mm)
		46.0°
1	5425	849
2	1356	1698
3	603	2548

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com

www.byiba.com


1 877-964-4646

ACCESSORIES FOR 1 CIRCUIT TRACK:


-105
Feed-in Cap
-BL - Black
-WH - White

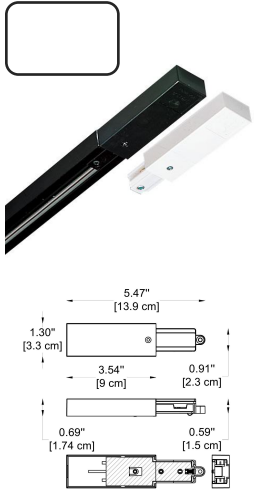


-106
End Cap
-BL - Black
-WH - White

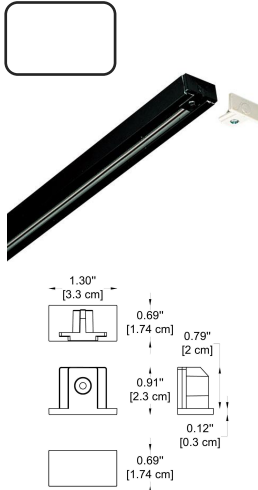


-107
Straight Connector
-BL - Black
-WH - White

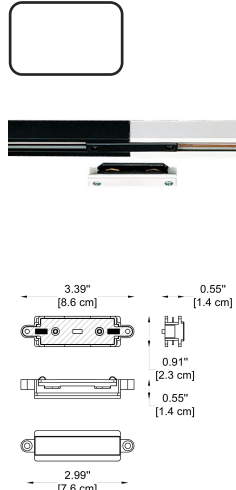


-108
L Connector
-BL - Black
-WH - White

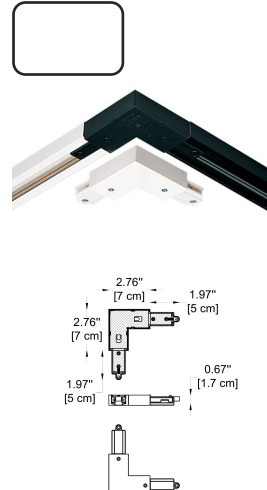

-110
T Connector
-BL - Black
-WH - White

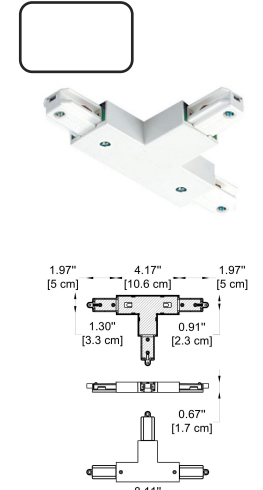

-111
X Connector
-BL - Black
-WH - White

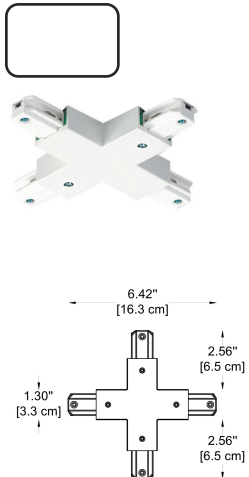

-153
Adapter
-BL - Black
-WH - White



HOW TO ORDER:

Example:
CODE: 105-WH

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE




WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com
www.byiba.com
1 877-964-4646

ACCESSORIES FOR 3CIRCUIT TRACK:


-305
Feed-in Cap
-BL - Black
-WH - White

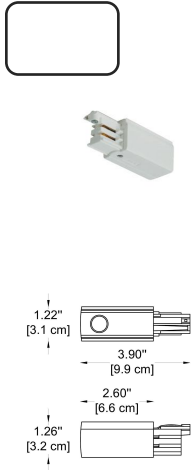


-306
End Cap
-BL - Black
-WH - White

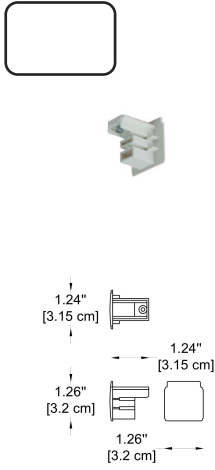


-307
Straight Connector
-BL - Black
-WH - White

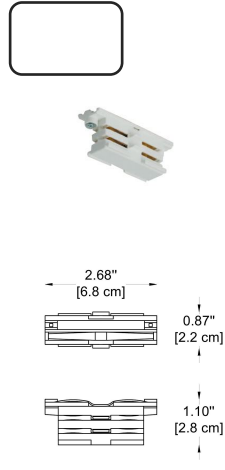


-308
L Connector
-BL - Black
-WH - White

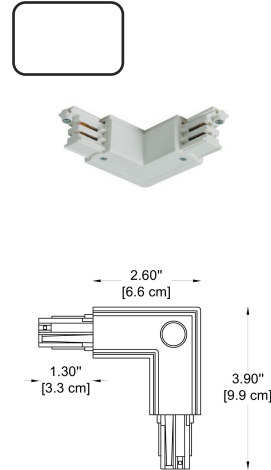


-310
T Connector
-BL - Black
-WH - White

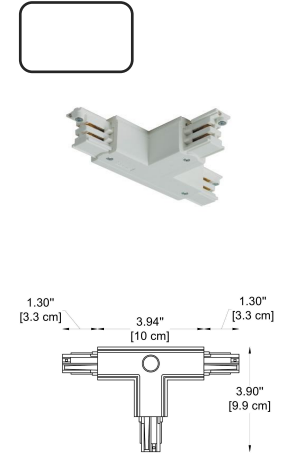

-311
X Connector
-BL - Black
-WH - White

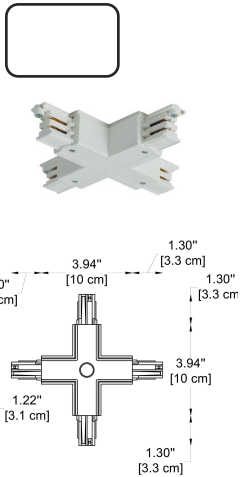

-351
Adapter
-BL - Black
-WH - White

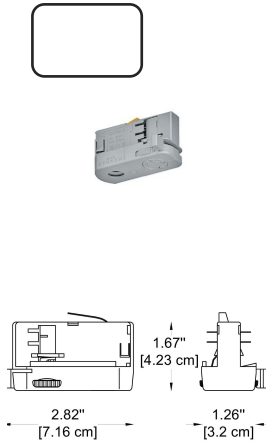

HOW TO ORDER:

Example:
CODE: -305-BL

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646