



BELL COLLECTION (magnetic track)

BY-BLLC-TC

PROJECT

SPEC TYPE

NOTES

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

GENERAL INFORMATION:

The Bell Track Collection offers a modern DC Track System with three profile options: Surface-Mounted S, Surface-Mounted L, and Recessed. Available in black and white finishes, the system comes in lengths of 39.4", 78.7", and 118". It features spotlights and pendant lights from the Bell series, with up to 10 customizable pieces. LED lighting options include CCT of 3000K, 4000K, or 5000K, with CRI of 80 or 90. Crafted from durable aluminum with an electrostatic powder coating, this collection is perfect for versatile and stylish indoor lighting.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black

LIGHTING:

LED

VOLTAGE:

Low Voltage Track (48V)

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:




sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

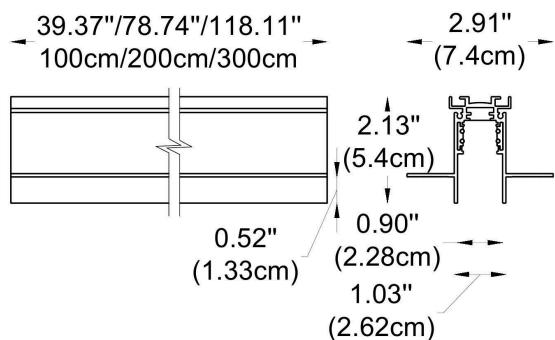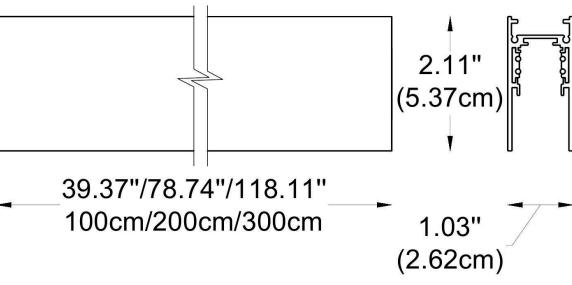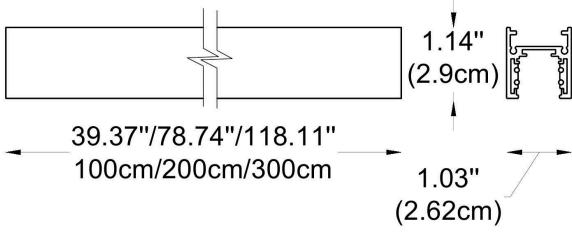

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

BY-BLLC-TC-1-01-BL

1 CHOOSE TRACK MODEL:

Surface-Mounted S profile



-1-01 L: 39.4" (100 cm)

-1-02 L: 78.7" (200 cm)

-1-03 L: 118" (300 cm)

Surface-Mounted L profile



-2-01 L: 39.4" (100 cm)

-2-02 L: 78.7" (200 cm)

-2-03 L: 118" (300 cm)

Recessed profile



-3-01 L: 39.4" (100 cm)

-3-02 L: 78.7" (200 cm)

-3-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

-BL Black
-WH White

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

65020-03-
K30-C80-B1-
WL

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65020-03**

Dimensions: Ø: 1.4" (3.5 cm) x H: 3.74" (9.5 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED





Power: 9W

CCT: **K30** - 3000K**K40** - 4000K**K50** - 5000KCRI: **C80** - 80**C90** - 90Beam Angle and lumens: **B1** - 12.5° = 419 lm**B2** - 17.5° = 396 lm**B3** - 25.5° = 394 lmFinish options: **-WL** - White**-BL** - Black

Operating temperature range - -20 to +40°C


Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

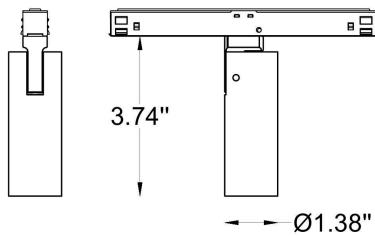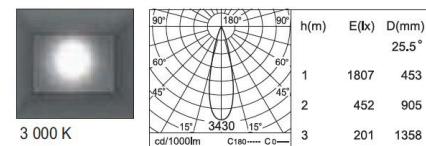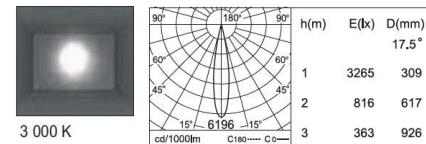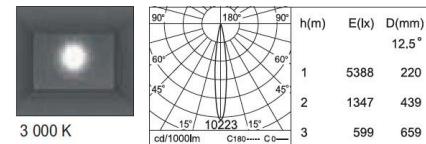


3.74"

Ø1.38"



3.74"

Ø1.38"



White
Black

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

65020-03-
K30-C80-B1-
WL

Example:
CODE FOR TRACK: BY-BLLC-TC-1-01-BL
CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL
CODE FOR ACCESSORIES: 505-BL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65020-08**

Dimensions: Ø: 2" (5 cm) x H: 4.33" (11 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Reflector: Lens
Light Source: LED (COB)
Power: 15W
CCT: **K30** - 3000K
K40 - 4000K






CRI: **C80** - 80
C90 - 90

Beam Angle and lumens: **B1** - 13.8° = 1 184 lm
B2 - 23.3° = 1 252 lm
B3 - 38.5° = 1 032 lm

Finish options: **-WL** - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

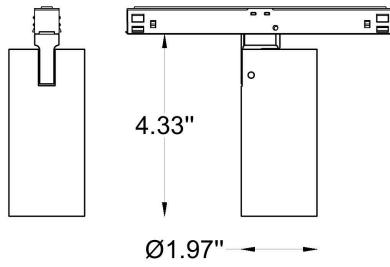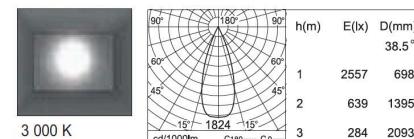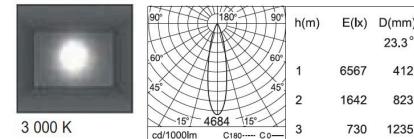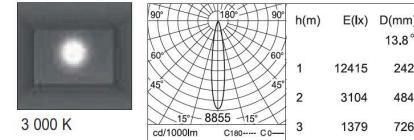

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **65020-11**

Dimensions: Ø: 2.16" (5.5 cm) x H: 1.8" (4.8 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: LENS & ABS (Chrome _Non Glare Reflector)

Light Source: LED

Power: 9W

CCT: **-K30** - 3000K

-K40 - 4000K

-K50 - 5000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle: **-B1** - 12.5° = 419 lm

and lumens: **-B2** - 17.5° = 396 lm

-B3 - 25.5° = 394 lm






Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

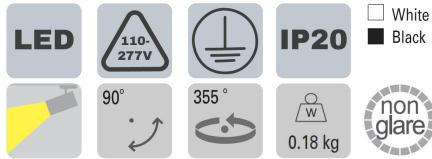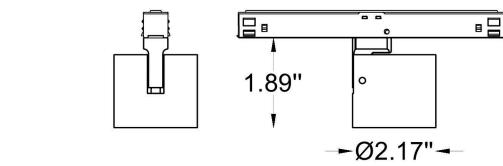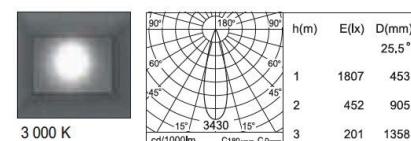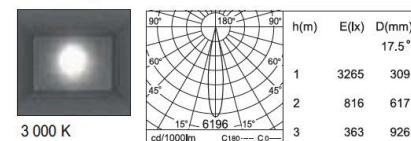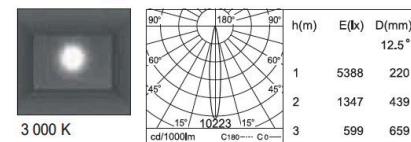

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65030-03**

Dimensions: Ø: 2.36" (6 cm) x H: 5.35" (13.6 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED (COB)

Power: 24W

CCT: **K30** - 3000K

K40 - 4000K

CRI: **C80** - 80

C90 - 90

Beam Angle and lumens: **B1** - 23.5° = 2 610 lm

B2 - 31° = 2 623 lm

B3 - 47.2° = 2 676 lm





Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

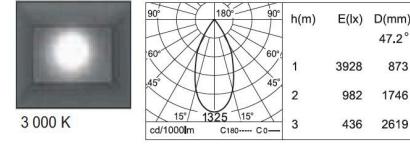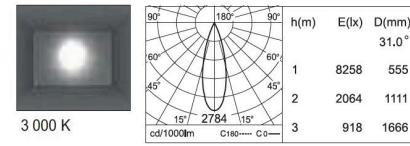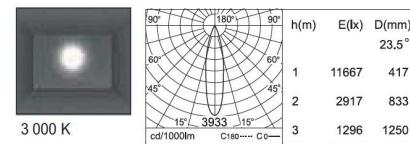

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE -

-65030-11

Dimensions: Ø: 2.55" (6.5 cm) x H: 4.13" (10.5 cm)

Housing: AL. Die-Casting, Electrostatic Powder Coating

Reflector: PC (Vacuum Coating)

Light Source: LED (COB)

Power: 14W

CCT: **-K30** - 3000K

-K40 - 4000K

CRI:

-C80 - 80

-C90 - 90

Beam Angle

-B1 - 15.5° = 1 450 lm

and lumens:

-B2 - 28.2° = 1 344 lm

-B3 - 39.5° = 1 357 lm

Finish options:

-WL - White

-BL - Black

Operating temperature range - **-20 to +40°C**

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



3000K

h(m)	E(lx)	D(mm)
1	11133	272
2	2783	544
3	1237	817

15.5°



3000K

h(m)	E(lx)	D(mm)
1	4960	503
2	1240	1006
3	551	1508


28.2°



3000K

h(m)	E(lx)	D(mm)
1	3280	719
2	820	1438
3	364	2157

39.5°

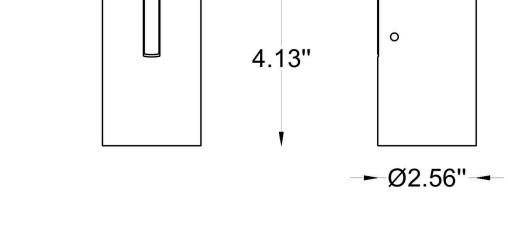

LED White Black

110-277V

90°

355°

IP20

0.7 kg

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



White
 Black

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - **-51220-03**

Dimensions: Ø: 2.36" (6 cm) x H: 7.87" (25 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED (COB)




Power: 14W

CCT: **-K30** - 3000K**-K40** - 4000KCRI: **-C80** - 80**-C90** - 90Beam Angle and lumens: **-B1** - 15.5° = 1 318 lm**-B2** - 27.2° = 1 281 lm**-B3** - 37.8° = 1 309 lmFinish options: **-WL** - White**-BL** - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

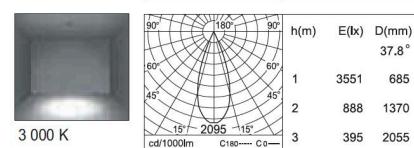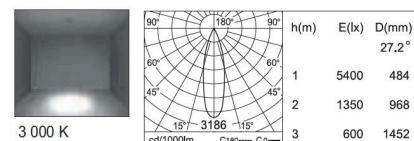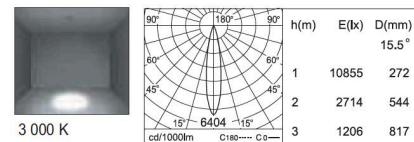

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

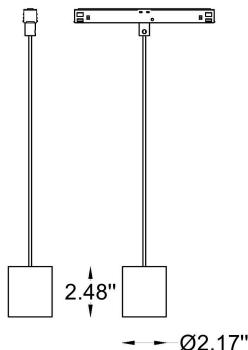

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - **-51240-11**

Dimensions: Ø: 2.16" (5.5 cm) x H: 2.1" (5.3 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: LENS & ABS (Chrome _Non Glare Reflector)

Light Source: LED

Power: 9W

CCT: **-K30** - 3000K

-K40 - 4000K

-K50 - 5000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle: **-B1** - 12.5° = 419 lm

-B2 - 17.5° = 396 lm

-B3 - 25.5° = 394 lm




Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

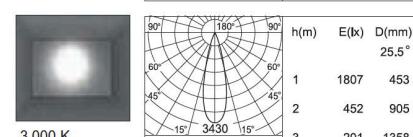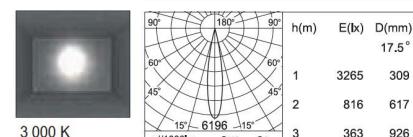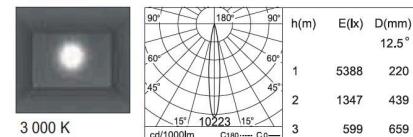

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

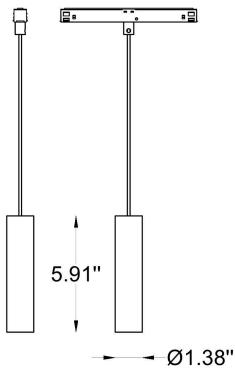

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - **-51240-03**

Dimensions: Ø: 1.37" (3.5 cm) x H: 5.9" (15 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED

Power: 9W

CCT: **-K30** - 3000K

-K40 - 4000K

-K50 - 5000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle and lumens: **-B1** - 12.5° = 419 lm

-B2 - 17.5° = 396 lm

-B3 - 25.5° = 394 lm




Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

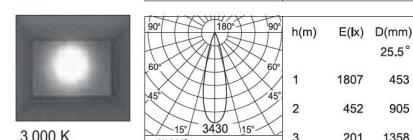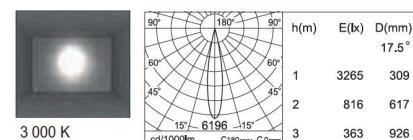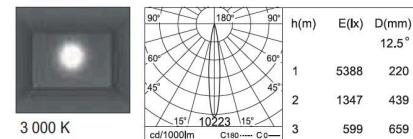

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

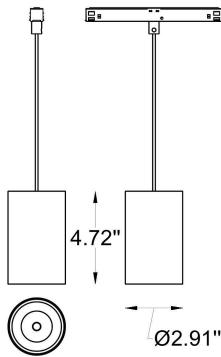

White
 Black

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - **-51400-11**

Dimensions: Ø: 2.9" (7.4 cm) x H: 4.7" (12 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: ABS (Chrome)

Wire: PVC

Light Source: LED (COB)

Power: 20W

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle and lumens: **-B1** - 21.8° = 1 535 lm

-B2 - 28.5° = 1 526 lm

-B3 - 40.0° = 1 708 lm




-WL - White

Finish options: **-BL** - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

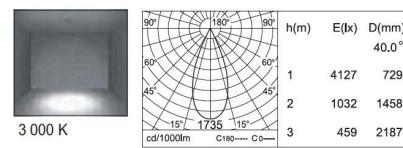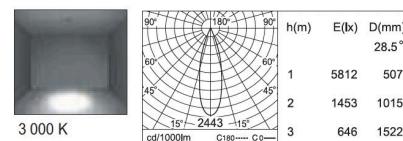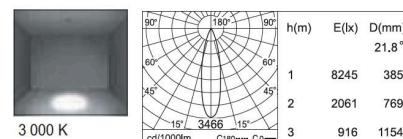

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

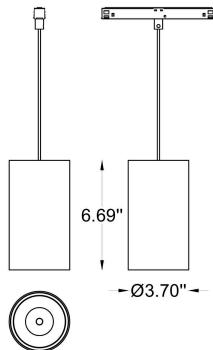
WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLLC-TC-1-01-BL

CODE FOR TRACK HEAD: 65020-03-K30-C80-B1-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - **-51410-11**

Dimensions: Ø: 3.7" (9.4 cm) x H: 4.7" (12 cm)

Housing: AL. Die-Casting, Electrostatic Powder Coating

Reflector: ABS (Chrome)

Wire: PVC

Light Source: LED (COB)

Power: 30W

CCT: **-K30** - 3000K**-K40** - 4000KCRI: **-C80** - 80**-C90** - 90

Beam Angle 28.9°


Lumens 2 303 lm

Finish options: **-WL** - White**-BL** - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

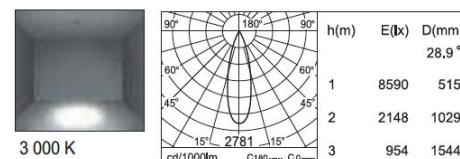

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

HOW TO ORDER (accessories):

CODE:


505-BL

4

ACCESSORIES:


-505
Feed-in Cap

-BL - Black
-WH - White




-506-02
End Cap

-BL - Black
-WH - White




-508
L Connector

-BL - Black
-WH - White




-551
Adapter

-BL - Black
-WH - White




-506-01
End Cap

-BL - Black
-WH - White




-507
Straight Connector

-BL - Black
-WH - White




-512
Flexible Connector

-BL - Black
-WH - White



-552
Adapter

-BL - Black
-WH - White



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646