



BYIBA LINEAR ST (magnetic track system)

BY-BLST-VND

PROJECT

SPEC TYPE

NOTES



Surface- Mounted / Recessed / Suspension

LED

24Vdc

IP20

GENERAL INFORMATION:

The BYIBA LINEAR ST (Standard Version) is a versatile magnetic track lighting system designed to bring flexibility and elegance to modern interiors. Built from high-quality aluminum with refined finishing options —Black, White, Bronze, or Gold—it adapts seamlessly to diverse architectural styles. This system offers multiple installation types, including surface-mounted, recessed, and suspension setups, making it suitable for residential, commercial, and hospitality applications. The LED-powered track ensures efficient, long-lasting illumination, while the magnetic connection provides effortless repositioning and customization of fixtures.

MATERIAL:

Aluminum

FINISHING:

Black / White / Bronze / Gold

LIGHTING:

LED

INPUT VOLTAGE:

24VDC

IP RATING:

20

MAXIMUM POWER:

200W

CONNECTION:

Terminal

INSTALLATION TYPE:

Surface / Suspended / Recessed

APPLIANCE CLASS:

I

WWW.BYIBA.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com
www.byiba.com
 1 877-964-4646


PROJECT

SPEC TYPE

NOTES

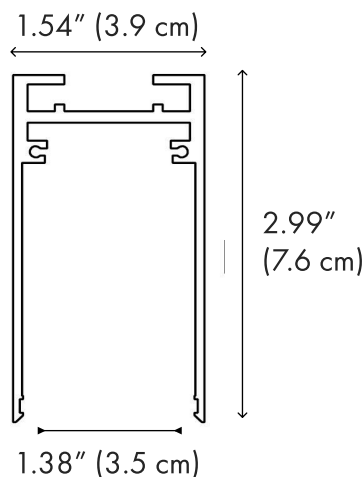

Surface-Mounted / Suspended

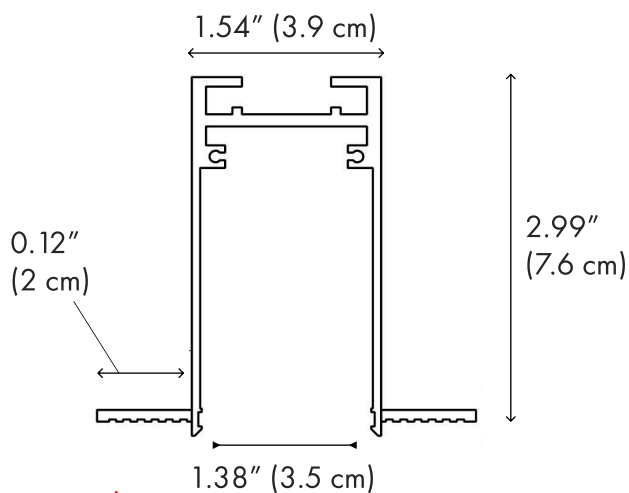

Recessed



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

BY-BLST-
VND-S-
L1-BL-BL

1 INSTALLATION TYPE:

- S Suspension
- R Recessed
- SM Surface-Mounted

2 PROFILE DIMENSIONS:

- Width - W: 1,54" (3.9 cm)
- Height - H: 2,99" (7.6 cm)

3 LENGHT:

- L1 Lenght - L: 39,37" (100 cm)
- L2 Lenght - L: 78,74" (200 cm)
- L3 Lenght - L: 118,11" (300 cm)

4 TRACK FINISH OPTIONS:

- BL Black
- BR Bronze
- WH White
- GL Gold

5 CANOPY FINISH OPTIONS: (for suspension version)

- BL Black
- BR Bronze
- WH White
- GL Gold

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-L16

Dimensions:

A) Diameter - 6.46" (16,4 cm)

B) Height - 4.02" (10,2 cm)

C) Width - 1.22" (3.1 cm)

Material:

Aluminum

Light Source:

LED / 18W / 830 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS - Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI



-TR - TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

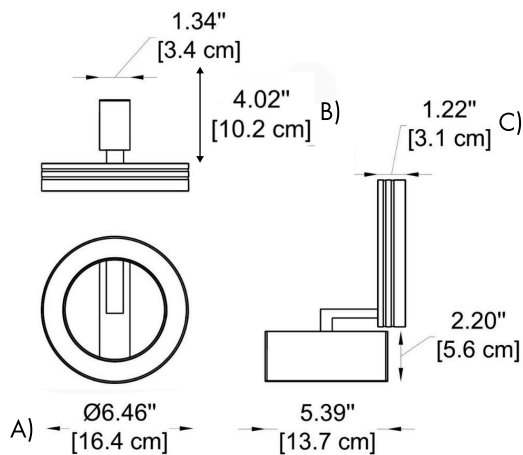

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-D18**

Dimensions: A) Diameter - 6.46" (16,4 cm)
B) Height - 4.02" (10,2 cm)
C) Width - 1.22" (3.1 cm)

Material: Aliminum
Light Source: LED / 18W / 830 lm / 24Vdc
Lighting type: Direct
Lighting distribution: Symmetric
Optical type: Spot
Dimmable: Yes
Driver: Remote
Driver type: Electronic
Emergency: Without
Insulation class: III

Beam Angle: **-B12** - 12°
-B34 - 34°
-B48 - 48°



CCT: **-K30** - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: **-C80** - 80
-C90 - 90

Finish Options: **-WL** - White (RAL9003)
-BL - Black (RAL9005)
-CUS - Custom on request*

Dimming Options: **-DIM** - 0-10V
-DL - DALI
-TR - TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -4°F to +104°F
Maintenance of lumen - L80 - 50,000 hours at 77°F

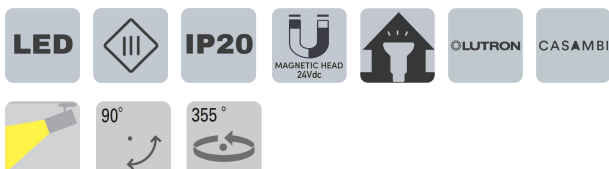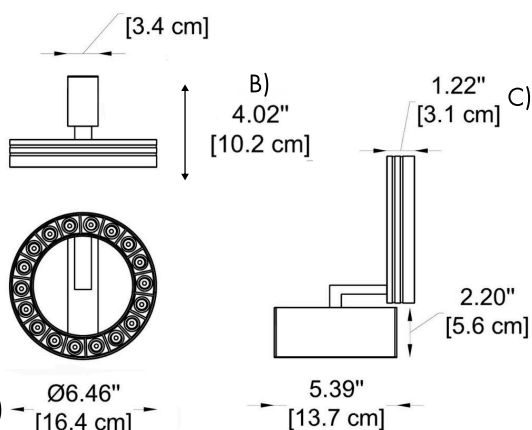

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

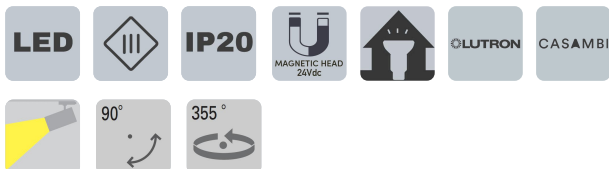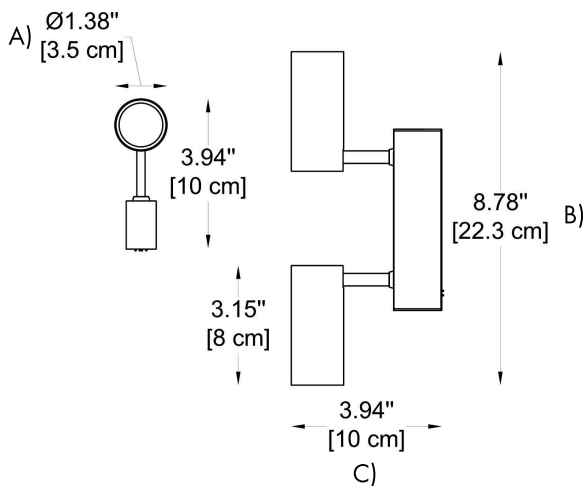

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-35-T

Dimensions:

A) Diameter - 1.38" (3.5 cm)

B) Max. Height - 3.94" (10 cm)

C) Length - 8.78" (22.3 cm)

Material:

Aluminum

Light Source:

LED / 2 x 5W / 700 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B20 - 20°

-B30 - 30°

-B40 - 40°

-B60 - 60°

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

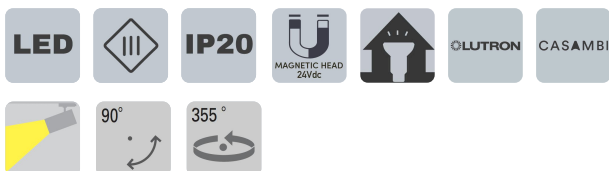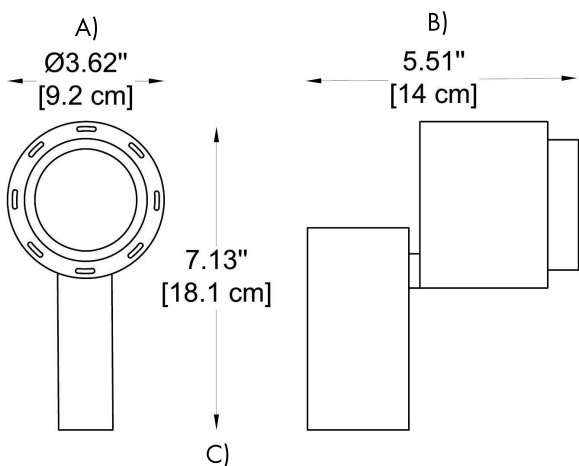

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-S92

Dimensions:

A) Diameter - 3.62" (9.2 cm)

B) Max Height - 5.51" (14 cm)

C) Length - 7.13" (18.1 cm)

Material:

Aluminum

Light Source:

LED / 15W / 625 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B20 - 20°

-B30 - 30°

-B40 - 40°

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

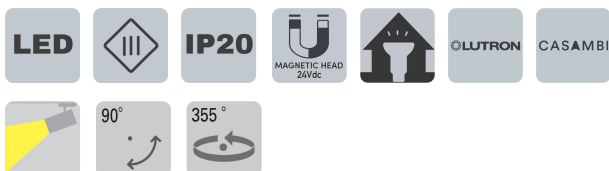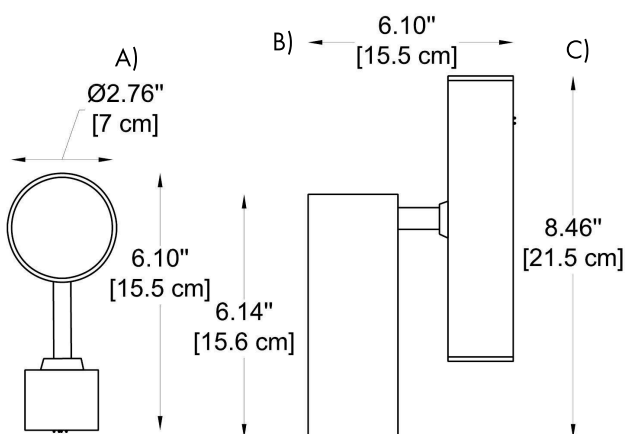

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-S70

Dimensions:

A) Diameter - 2.76" (7 cm)

B) Max Height - 5.10" (15.5 cm)

C) Length - 8.46" (21.5 cm)

Material:

Aluminum

Light Source:

LED / 20W / 1450 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B18 - 18°

-B24 - 24°

-B36 - 36°

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

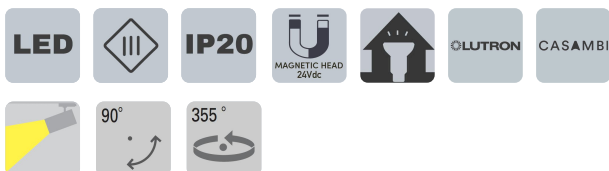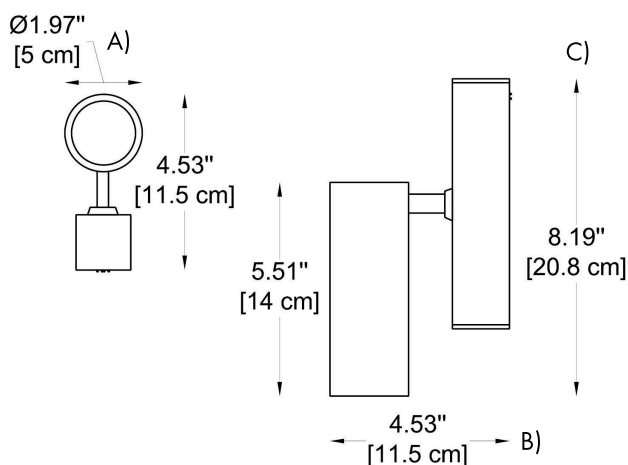

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-S65

Dimensions:

A) Diameter - 1.97" (5 cm)

B) Max. Height - 4.53" (11.5 cm)

C) Length - 8.19" (20.8 cm)

Material:

Aluminum

Light Source:

LED / 8W / 276 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B20 - 20°

-B30 - 30°

-B40 - 40°

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

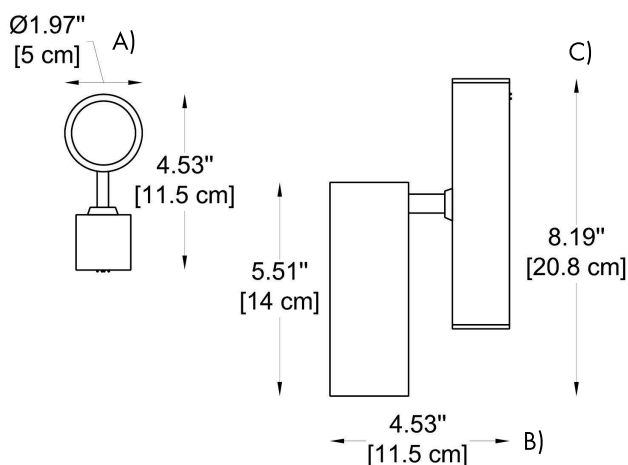

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-S50

Dimensions:

A) Diameter - 1.97" (5 cm)

B) Max. Height - 4.53" (11.5 cm)

C) Length - 8.19" (20.8 cm)

Material:

Aluminum

Light Source:

LED / 10W / 700 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B18 - 18°

-B24 - 24°

-B36 - 36°

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

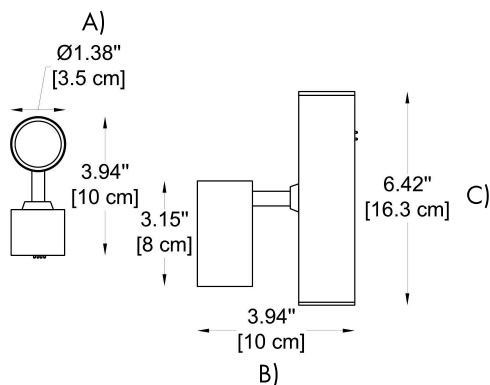

LED



IP20



CLUTRON

CASAMBI



90°

355°

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-S35

Dimensions:

A) Diameter - 1.38" (3.5 cm)

B) Max Height - 3.94" (10 cm)

C) Length - 6.42" (16.3 cm)

Material:

Aluminum

Light Source:

LED / 5W / 378 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B20 - 20°

-B30 - 30°

-B40 - 40°

-B60 - 60°

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

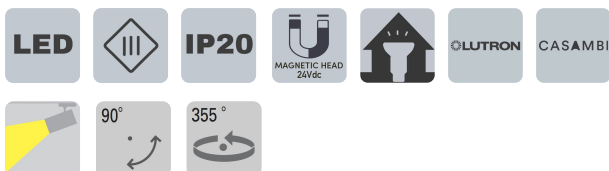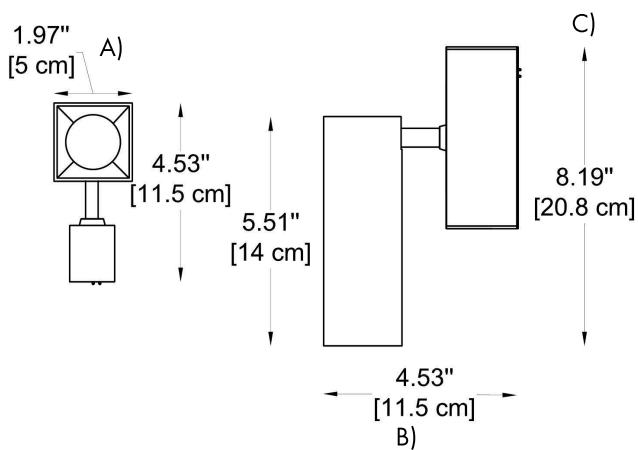

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-50-S**

Dimensions: A) Head Length / Height - 1.97" (5 cm)
B) Max Height - 4.43" (11.5 cm)
C) Max. Length - 5.41" (20.8 cm)

Material: Aliminum
Light Source: LED / 10W / 700 lm / 24Vdc
Lighting type: Direct
Lighting distribution: Symmetric
Optical type: Spot
Dimmable: Yes
Driver: Remote
Driver type: Electronic
Emergency: Without
Insulation class: III

Beam Angle: **-B18** - 18°
-B24 - 24°
-B36 - 36°

CCT: **-K27** 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: **-C80** - 80
-C90 - 90

Finish Options: **-WL** - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options: **-DIM** - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

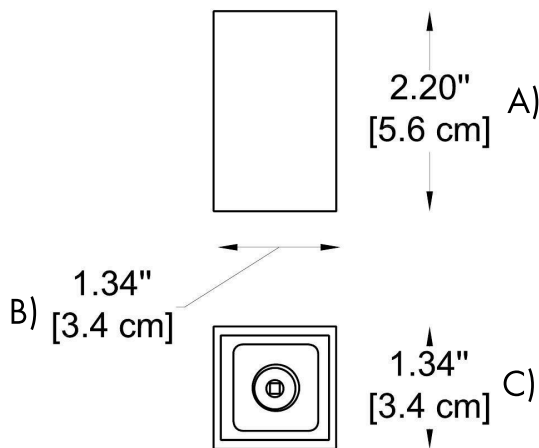

LED



IP20



LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-D01
Dimensions:	A) Height - 2.2" (5.6 cm)
	B) Length - 1.34" (3.4 cm)
	C) Width - 1.34" (3.4 cm)

Material:	Aluminum
Light Source:	LED / 1W / 80 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Diffuse
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III

Beam Angle:	-B12 - 12°
	-B34 - 34°
	-B48 - 48°

CCT:	-K27 2700K
	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K

CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White (RAL9003)
	-BL - Black (RAL9005)
	-CUS Custom on request*

Dimming Options:	-DIM - 0-10V
	-DL - DALI
	-TR - TRIAC
	-LT - Lutron
	-CS - Casambi

Operating temperature range - -4°F to +104°F
Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

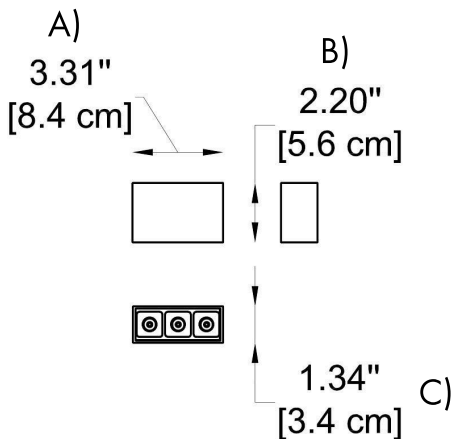

LED



IP20



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-D03

Dimensions:

A) Length - 3.31" (8.4 cm)

B) Height - 2.2" (5.6 cm)

C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 4W / 240 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B12 - 12°

-B34 - 34°

-B48 - 48°

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

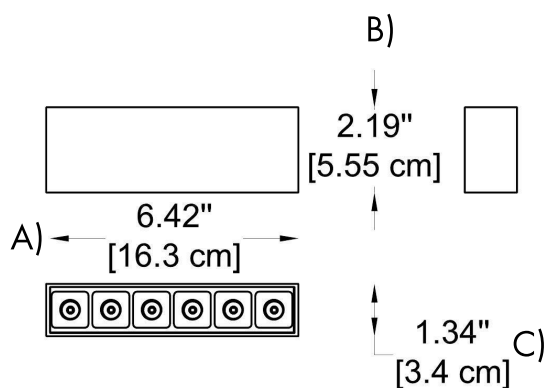

LED



IP20



LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-D06

Dimensions:

A) Length - 6.42" (16.3 cm)

B) Height - 2.19" (5.5 cm)

C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 8W / 511 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B12 - 12°

-B34 - 34°

-B48 - 48°

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-D12

Dimensions:

A) Length - 12.6" (32 cm)
B) Height - 2.20" (5.6 cm)
C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 16W / 1449 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B12 - 12°
-B34 - 34°
-B48 - 48°

CCT:

-K27 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI:

-C80 - 80
-C90 - 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F



B)

2.20"

[5.6 cm]

C)

1.34"

[3.4 cm]

B)

2.20"

[5.6 cm]

C)

1.34"

[3.4 cm]

A)

12.60"

[32 cm]

LED

III

IP20

MAGNETIC HEAD
24Vdc

CLUTRON

CASAMBI



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

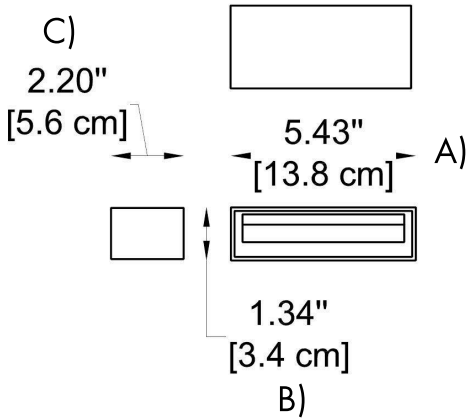

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-W13

Dimensions:

A) Length - 5.43" (13.8 cm)

B) Height - 1.34" (3.4 cm)

C) Width - 2.2" (5.6 cm)

Material:

Aluminum

Light Source:

LED / 8W / 400 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Wall washer

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

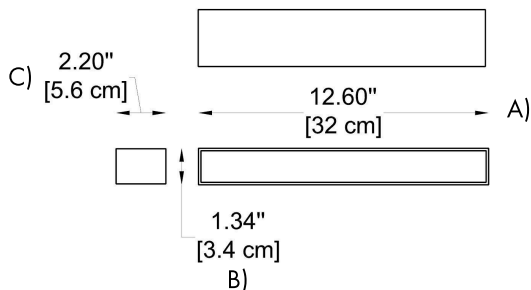

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-W27

Dimensions:

A) Length - 12.6" (32 cm)

B) Height - 1.34" (3.4 cm)

C) Width - 2.2" (5.6 cm)

Material:

Aluminum

Light Source:

LED / 16W / 611 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

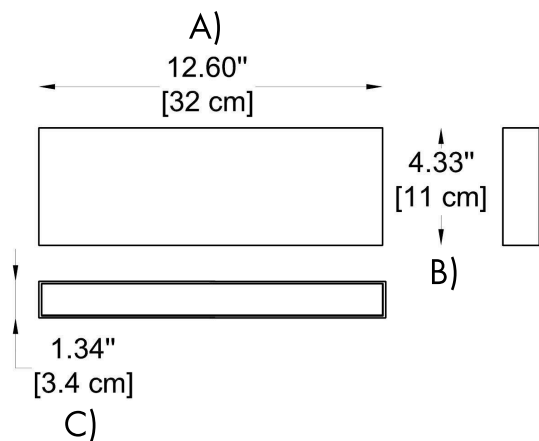

LED



IP20



LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-O32

Dimensions:

A) Length - 12.6" (32 cm)

B) Height - 4.33" (11 cm)

C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 16W / 611 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

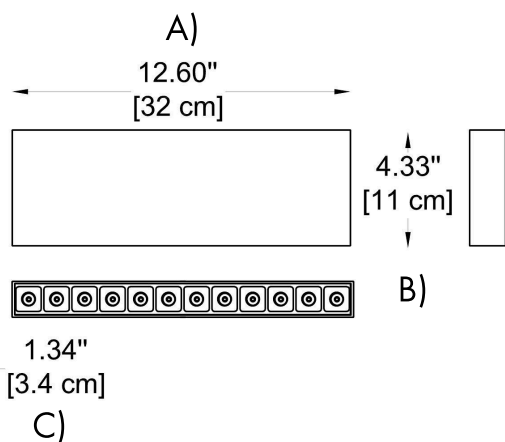

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-O12

Dimensions:

A) Length - 12.6" (32 cm)
B) Height - 4.33" (11 cm)
C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 16W / 1000 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B12 - 12°
-B34 - 34°
-B48 - 48°

CCT:

-K27 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI:

-C80 - 80
-C90 - 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

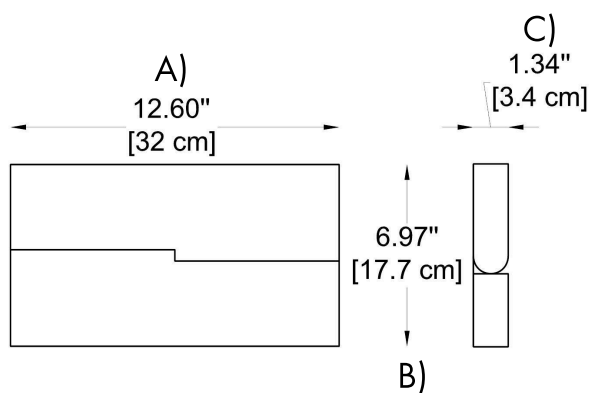

LED



IP20



MAGNETIC HEAD
24Vdc



LUTRON

CASAMBI



90°

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-C80-
WL-DIML-DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-F32

Dimensions:

A) Length - 12.6" (32 cm)
B) Height - 6.97" (17.7 cm)
C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 16W / 611 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI:

-C80 - 80
-C90 - 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

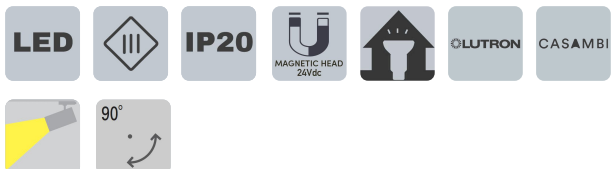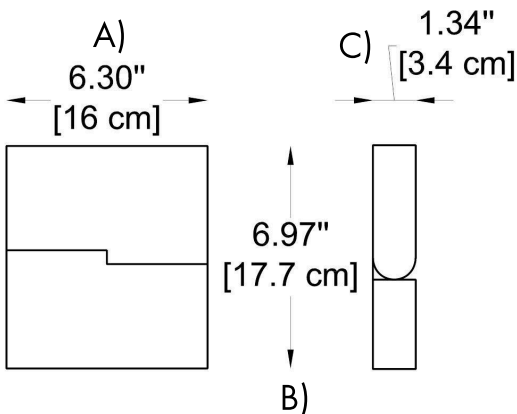

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-F16

Dimensions:

A) Length - 6.3" (16 cm)

B) Height - 6.97" (17.7 cm)

C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 7W / 262 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com




www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

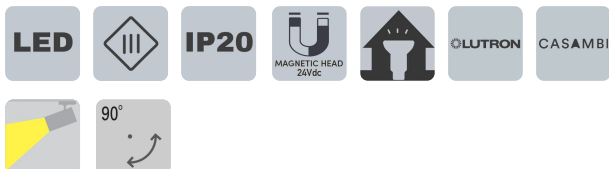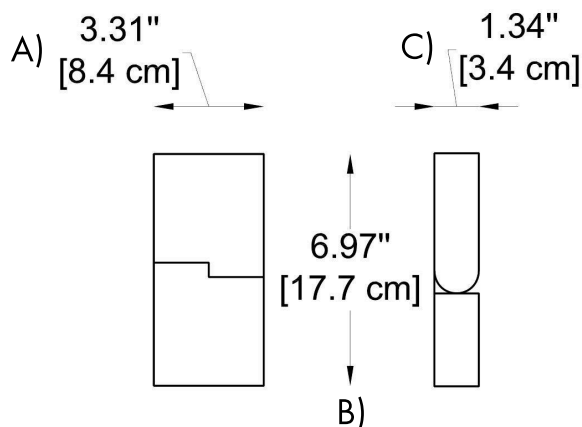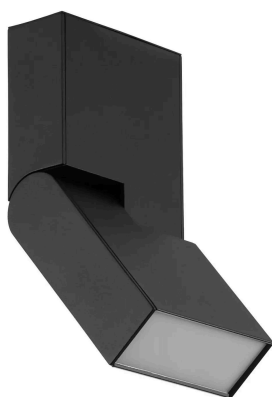

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-F08

Dimensions:

A) Length - 3.31" (8.4 cm)
B) Height - 6.97" (17.7 cm)
C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 4W / 215 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K
-K30 3000K
-K40 4000K
-K50 5000K

CRI:

-C80 80
-C90 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options:

-DIM 0-10V
-DL DALI
-TR TRIAC
-LT Lutron
-CS Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

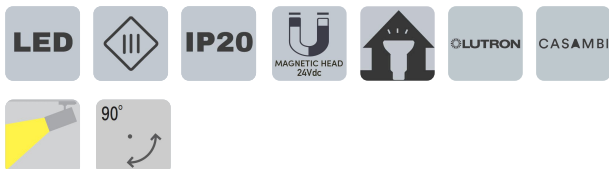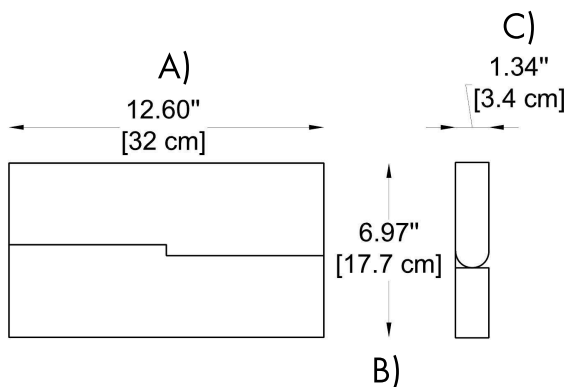

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-F12

Dimensions:

A) Length - 12.6" (32 cm)
B) Height - 6.97" (17.7 cm)
C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 16W / 1000 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B12 - 12°
-B34 - 34°
-B48 - 48°

CCT:

-K27 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI:

-C80 - 80
-C90 - 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

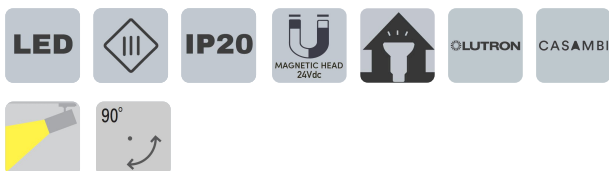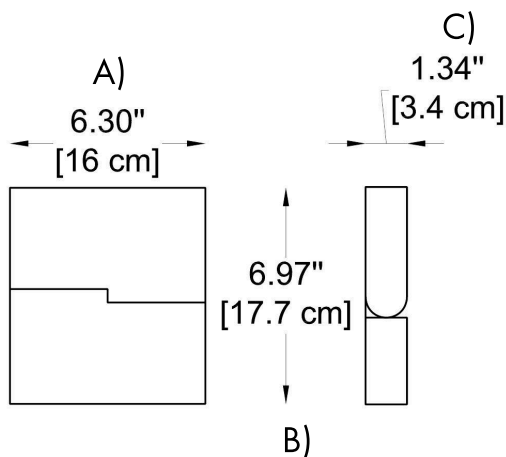

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-F06**

Dimensions: A) Length - 6.3" (16 cm)
B) Height - 6.97" (17.7 cm)
C) Width - 1.34" (3.4 cm)

Material: Aliminum
Light Source: LED / 8W / 511 lm / 24Vdc
Lighting type: Direct
Lighting distribution: Symmetric
Optical type: Spot
Dimmable: Yes
Driver: Remote
Driver type: Electronic
Emergency: Without
Insulation class: III

Beam Angle: **-B12** - 12°
-B34 - 34°
-B48 - 48°

CCT: **-K27** 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: **-C80** - 80
-C90 - 90

Finish Options: **-WL** - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options: **-DIM** - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -4°F to +104°F
Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

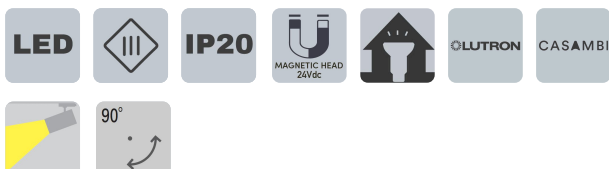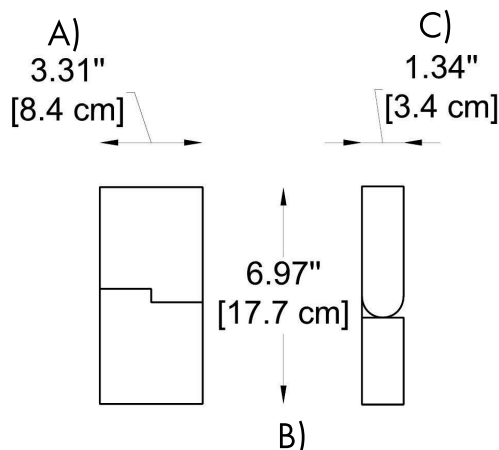

HOW TO ORDER:

Example:
CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL
CODE FOR HEAD: L16-K30-C80-WL-DIM
CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-F03**
Dimensions: A) Length - 3.31" (8.4 cm)
B) Height - 6.97" (17.7 cm)
C) Width - 1.34" (3.4 cm)

Material: Aliminum
Light Source: LED / 4W / 240 lm / 24Vdc
Lighting type: Direct
Lighting distribution: Symmetric
Optical type: Spot
Dimmable: Yes
Driver: Remote
Driver type: Electronic
Emergency: Without
Insulation class: III

Beam Angle: **-B12** - 12°
-B34 - 34°
-B48 - 48°

CCT: **-K27** 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: **-C80** - 80
-C90 - 90

Finish Options: **-WL** - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options: **-DIM** - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -4°F to +104°F
Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

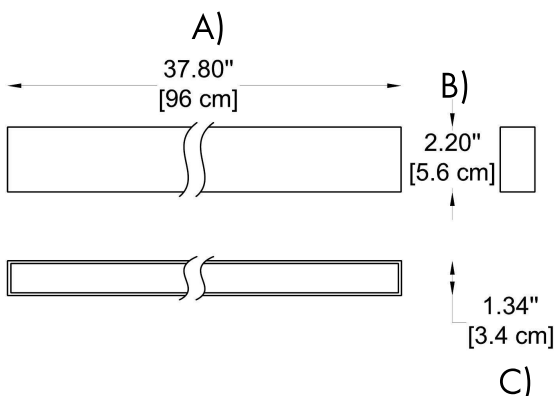

LED



IP20



MAGNETIC HEAD
24Vdc



LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-L96

Dimensions:

A) Length - 37.8" (96 cm)
B) Height - 2.2" (5.6 cm)
C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 39W / 2087 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K
-K30 3000K
-K40 4000K
-K50 5000K

CRI:

-C80 80
-C90 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options:

-DIM 0-10V
-DL DALI
-TR TRIAC
-LT Lutron
-CS Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-L64

Dimensions:

A) Length - 25.2" (64 cm)

B) Height - 2.2" (5.6 cm)

C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 26W / 1295 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI



-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

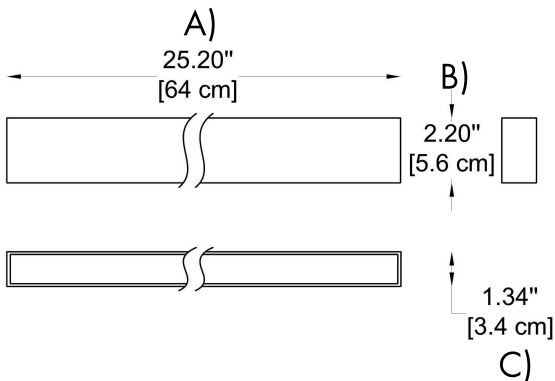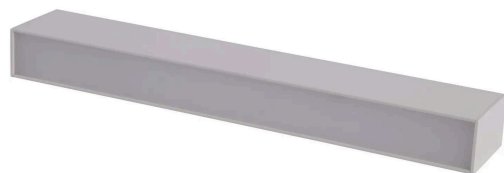

LED



IP20



LUTRON

CASAMBI



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

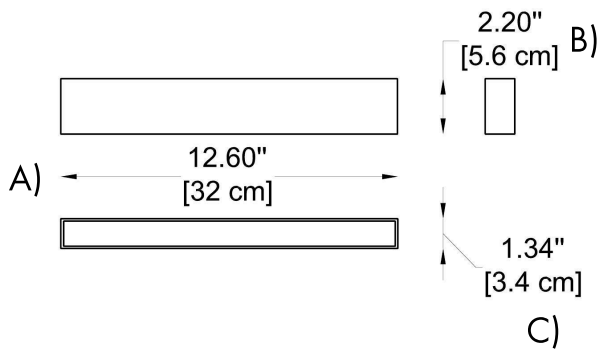

LED



IP20



MAGNETIC HEAD
24Vdc



LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-L32

Dimensions:

A) Length - 12.6" (32 cm)

B) Height - 2.2" (5.6 cm)

C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 16W / 611 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-L16

Dimensions:

A) Length - 6.46" (16.4 cm)

B) Height - 2.2" (5.6 cm)

C) Width - 1.34" (3.4 cm)

Material:

Aluminum

Light Source:

LED / 7W / 262 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI


-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

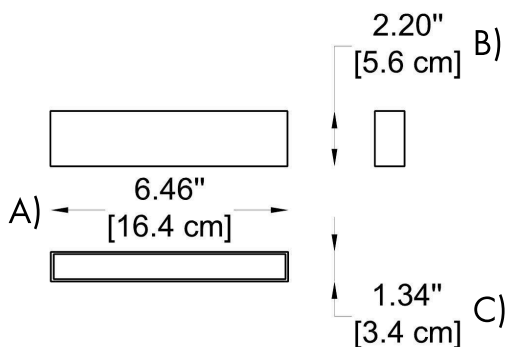

LED

III

IP20

MAGNETIC HEAD
24Vdc

LUTRON

CASAMBI



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

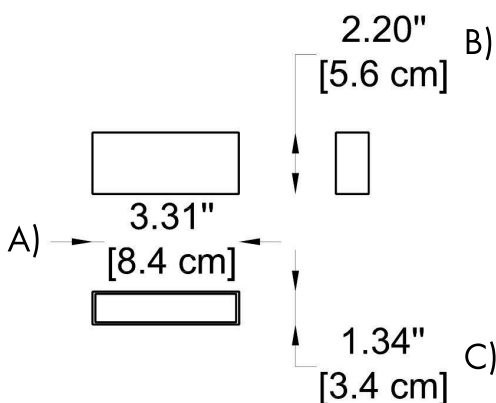

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-L08
Dimensions:	A) Length - 3.31" (8.4 cm)
	B) Height - 2.2" (5.6 cm)
	C) Width - 1.34" (3.4 cm)

Material:	Aluminum
Light Source:	LED / 4W / 215 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Diffuse
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III

CCT:	-K27 2700K
	-K30 3000K
	-K40 4000K
	-K50 5000K

CRI:	-C80 80
	-C90 90

Finish Options:	-WL White (RAL9003)
	-BL Black (RAL9005)
	-CUS Custom on request*

Dimming Options:	-DIM 0-10V
	-DL DALI
	-TR TRIAC
	-LT Lutron
	-CS Casambi

Operating temperature range - -4°F to +104°F
Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

BYIBA



LIGHT

BY-BLST-VND

PROJECT

SPEC TYPE

NOTES

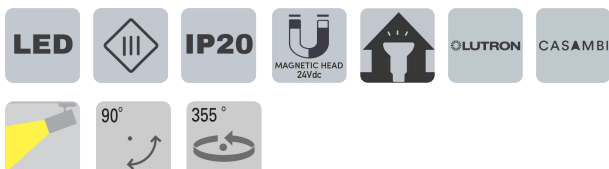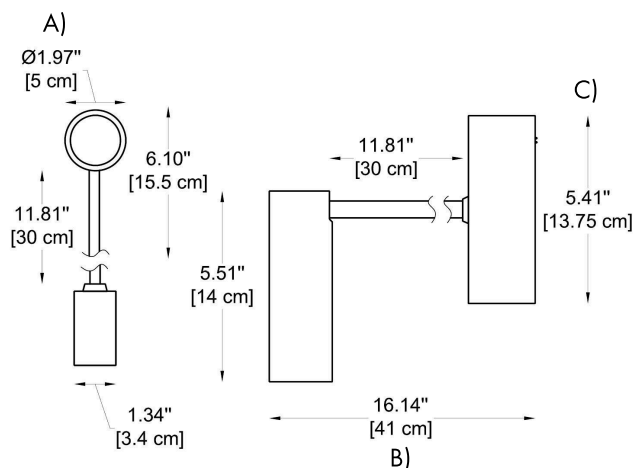

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-P50LG

Dimensions:

A) Diameter - 1.97" (5 cm)

B) Max Height - 16.14" (41 cm)

C) Length - 5.41" (13.75 cm)

Material:

Aluminum

Light Source:

LED / 20W / 1450 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B18 - 18°

-B24 - 24°

-B36 - 36°

CCT:

-K27 2700K

-K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

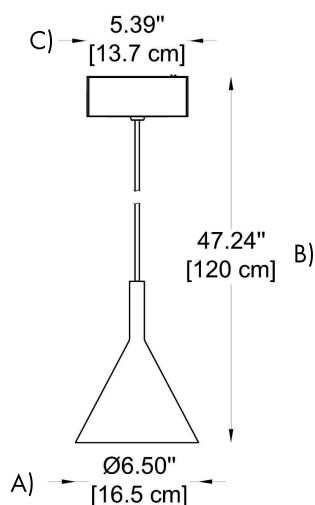

LED



IP20



LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-PGL

Dimensions:

A) Diameter - 6.5" (16,5 cm)

B) Max. Height - 4.02" (10,2 cm)

C) Canopy - 5.39" (13.7 cm)

Material:

Aluminum

Light Source:

LED / 10W / 700 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

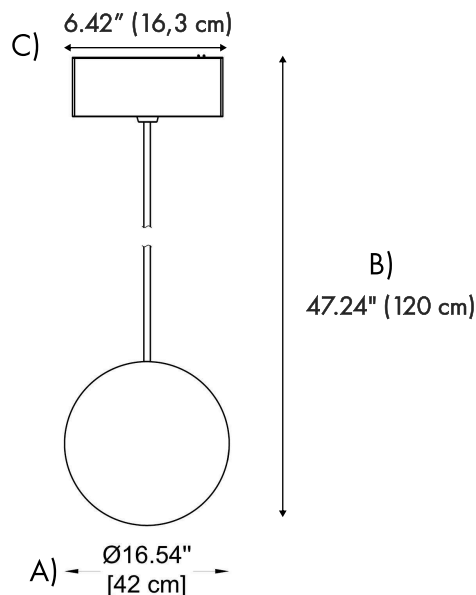

LED



IP20



LUTRON

CASAMBI

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-PG

Dimensions:

A) Diameter - 16.54" (42 cm)

B) Max Height - 47.24" (120 cm)

C) Canopy - 6.42" (16.3 cm)

Material:

Aluminum

Light Source:

LED / 5W / 278 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

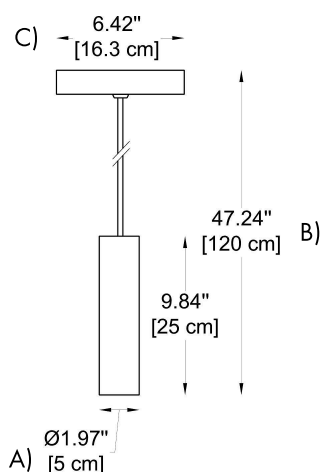

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-P50**

Dimensions: A) Diameter - 1.97" (5 cm)
B) Max Height - 47.24" (120 cm)
C) Canopy - 6.42" (16.3 cm)

Material: Aliminum
Light Source: LED / 10W / 692 lm / 24Vdc
Lighting type: Direct
Lighting distribution: Symmetric
Optical type: Spot
Dimmable: Yes
Driver: Remote
Driver type: Electronic
Emergency: Without
Insulation class: III

Beam Angle: **-B18** - 18°
-B24 - 24°
-B36 - 36°

CCT: **-K27** 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: **-C80** - 80
-C90 - 90

Finish Options: **-WL** - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options: **-DIM** - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

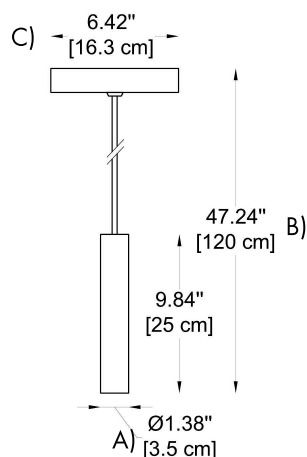

LED



IP20



CLUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-P35

Dimensions:

A) Diameter - 1.38" (3.5 cm)
B) Max Height - 47.24" (120 cm)
C) Canopy - 6.42" (16.3 cm)

Material:

Aluminum

Light Source:

LED / 5W / 378 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B20 - 20°
-B30 - 30°
-B40 - 40°
-B60 - 60°

CCT:

-K27 2700K
-K30 3000K
-K40 4000K
-K50 5000K

CRI:

-C80 - 80
-C90 - 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS - Custom on request*

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR - TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

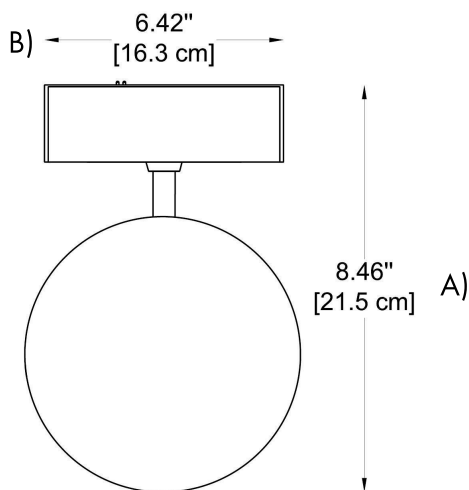

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BLST-VND-S-L1-BL-BL

CODE FOR HEAD: L16-K30-C80-WL-DIM

CODE FOR ACCESSORIES: 45D-CC-OCR-OCR-TC-IC-WH

CODE:

L16-K30-
C80-WL-
DIM

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-PGB

Dimensions:

A) Max Height - 8.46" (21.5 cm)

B) Canopy - 6.42" (16.3 cm)

Material:

Aluminum

Light Source:

LED / 5W / 278 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27 2700K

-K30 3000K

-K40 4000K

-K50 5000K

CRI:

-C80 80

-C90 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR TRIAC

-LT - Lutron

-CS - Casambi

Operating temperature range - -4°F to +104°F

Maintenance of lumen - L80 - 50,000 hours at 77°F

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

HOW TO ORDER (accessories):

Example:
CODE: 45D-CC-OCR-OCR-TC-IC-WH


CODE:

45D-CC-
OCR-OCR-
TC-IC-WH



6

ACCESSORIES:


CODE - -45D
45D Corner




CODE - -OCR
Outer Corner-R




CODE - -CC
Cross Corner




CODE - -ICR
Inner Corner-R




CODE - -TCR
T Corner-R





CODE - -OCR
L Corner-R



CODE - -TC
T Corner



CODE - -OC
Outer Corner



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

HOW TO ORDER:

Example:
CODE: 45D-CC-OCR-OCR-TC-IC-WH


CODE:

45D-CC-
OCR-OCR-
TC-IC-WH


6

ACCESSORIES:

CODE - -IC
Inner Corner

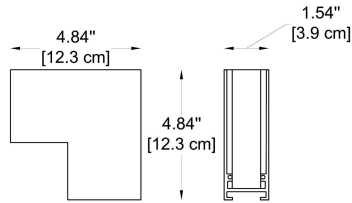

CODE - -LC
L Corner



7

ACCESSORIES FINISH OPTIONS:

- WL - White (RAL9003)
- BL - Black (RAL9005)
- CUS Custom on request*

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646