

C-SPINE (track)

BY-C-SPN-TC

PROJECT

SPEC TYPE

NOTES

WWW.BULLARDCOLLECTION.COM[TECHNICAL](#)[OUTDOOR](#)[DECORATIVE](#)**GENERAL INFORMATION:**

The C-SPINE Non-Magnetic Track system features both 1-Circuit and 3-Circuit track profiles, available in three lengths: 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). Operating at 110-277V, the tracks come in white or black finishes and are made from aluminum with an electrostatic powder coating.

This system includes four spotlight models, with dimensions ranging from Ø 2.36" (6 cm) to Ø 4" (10.2 cm), and heights from 6.93" (17.6 cm) to 9.17" (23.3 cm). Power options range from 14W to 44W, and the reflectors are made from anodized specular silver or available with a lens. CCT options are 3000K and 4000K, with CRI choices of 80 or 90. The spotlights are available in white, black, or gray finishes.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black, Gray

LIGHTING:

LED

VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:




sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

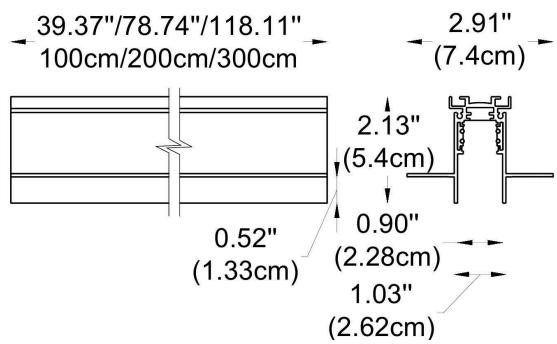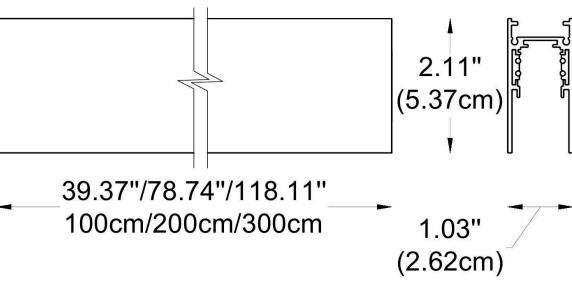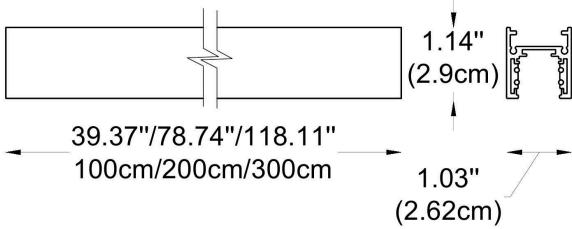WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-C-SPN-TC-1-01-BL

CODE FOR TRACK HEAD: 65160-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

BY-C-SPN-TC-1-01-BL

1 CHOOSE TRACK MODEL:

1-Circuit Track Profile



-1-01 L: 39.4" (100 cm)

-1-02 L: 78.7" (200 cm)

-1-03 L: 118" (300 cm)

3-Circuit Track Profile



-2-01 L: 39.4" (100 cm)

-2-02 L: 78.7" (200 cm)

-2-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

-BL	Black
-WH	White



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

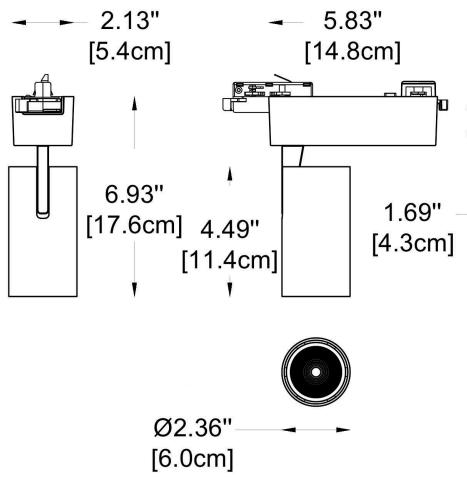WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-C-SPN-TC-1-01-BL

CODE FOR TRACK HEAD: 65160-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65160-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65160-01

Dimensions:

Ø: 2.36" (6 cm) x H: 6.93" (17.6 cm)

Housing:

AL. Extrude, Electrostatic Powder Coating

Reflector:

PC (Vacuum Coating)

Gear Box:

AL. Die-Casting, Electrostatic Powder Coating

Light Source:

LED (COB)

Power & Currents:

14W / 350 mA

CCT:

-K30 - 3000K**-K40** - 4000K

CRI:

-C80 - 80**-C90** - 90

Beam Angle &

-B1 - 15.5° = 2277 lm

lumens:

-B2 - 28.2° = 2244 lm**-B3** - 39.5° = 2284 lm

Finish Options:

-WL - White**-BL** - BlackOperating temperature range - **-20 to +40°C**

Maintenance of lumen - L80 - 50 000 hours at 25 °C

CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646




WE WELCOME ALL CUSTOM ORDERS

PROJECT

SPEC TYPE

NOTES

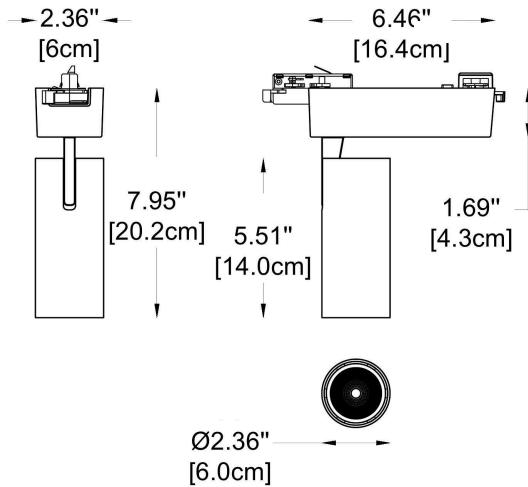WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-C-SPN-TC-1-01-BL

CODE FOR TRACK HEAD: 65160-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65160-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65160-02

Dimensions:

Ø: 2.36" (6 cm) x H: 7.95" (20.2 cm)

Housing:

AL. Extrude, Electrostatic Powder Coating

Reflector:

PC (Vacuum Coating)

Gear Box:

AL. Die-Casting, Electrostatic Powder Coating

Light Source:

LED (COB)

Power & Currents:

23W / 600 mA

CCT:

-K30 - 3000K**-K40** - 4000K

CRI:

-C80 - 80**-C90** - 90

Beam Angle &

-B1 - 27.2° = 2277 lm

lumens:

-B2 - 38.8° = 2244 lm

Finish Options:

-WL - White**-BL** - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS


PROJECT

SPEC TYPE

NOTES



REFLECTOR

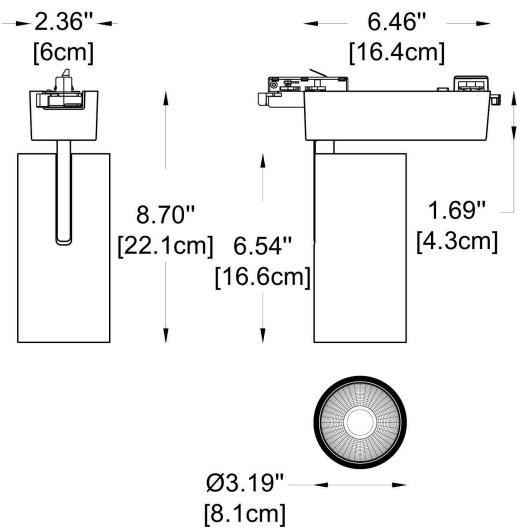WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-C-SPN-TC-1-01-BL

CODE FOR TRACK HEAD: 65160-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65160-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65170

Dimensions:

Ø: 3.20" (8.1 cm) x H: 8.7" (22 cm)

Housing:

AL. Extrude, Electrostatic Powder Coating

Reflector:

AL. Anodized Specular Silver

Gear Box:

AL. Die-Casting, Electrostatic Powder Coating

Light Source:

LED (COB)

Power & Currents:

-W2 - 20W / 500 mA**-W3** - 28W / 700 mA

CCT:

-K30 - 3000K**-K40** - 4000K

CRI:

-C80 - 80**-C90** - 90

Beam Angle & lumens:

For 20W model:

-B1 - 17.7° = 2277 lm**-B2** - 25.5° = 2244 lm**-B3** - 38.9° = 2284 lm

For 28W model:

-B1 - 17.8° = 3044 lm**-B2** - 26.0° = 3000 lm**-B3** - 39.2° = 3056 lm

Finish options:

-WL - White**-BL** - Black**-GR** - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



LENS

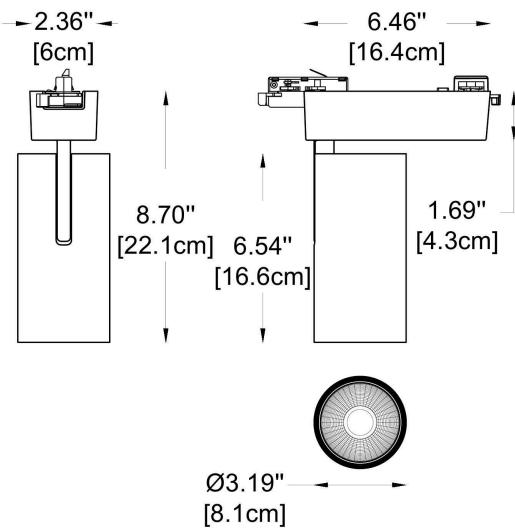WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-C-SPN-TC-1-01-BL

CODE FOR TRACK HEAD: 65160-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65160-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65171

Dimensions:

Ø: 3.20" (8.1 cm) x H: 8.7" (22 cm)

Housing:

AL. Extrude, Electrostatic Powder Coating

Reflector:

Lens

Gear Box:

AL. Die-Casting, Electrostatic Powder Coating

Light Source:

LED (COB)

Power & Currents:

-W2 - 20W / 500 mA**-W3** - 27W / 700 mA

CCT:

-K30 - 3000K**-K40** - 4000K

CRI:

-C80 - 80**-C90** - 90

Beam Angle & lumens:

For 20W model:

-B1 - 20° = 2278 lm**-B2** - 30.6° = 2299 lm**-B3** - 50.7° = 2335 lm

For 27W model:

-B1 - 20° = 2993 lm**-B2** - 30.7° = 3086 lm**-B3** - 50.9° = 3119 lm

Finish options:

-WL - White**-BL** - Black**-GR** - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

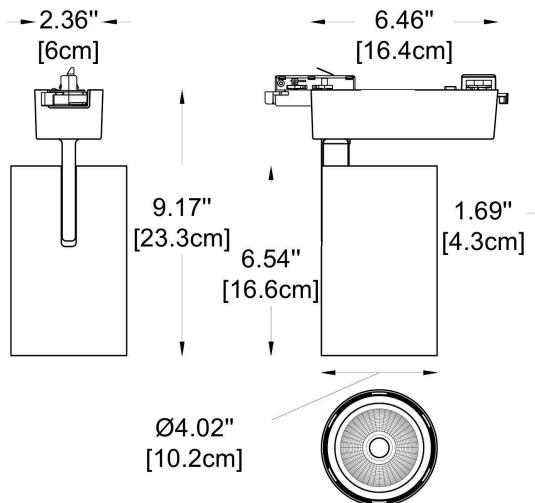

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-C-SPN-TC-1-01-BL

CODE FOR TRACK HEAD: 65160-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65160-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65180

Dimensions:

Ø: 4" (10.2 cm) x H: 9.17" (23.3 cm)

Housing:

AL. Extrude, Electrostatic Powder Coating

Reflector:

AL. Anodized Specular Silver

Gear Box:

AL. Die-Casting, Electrostatic Powder Coating

Light Source:

LED (COB)

Power & Currents:

-W2 - 27W / 700 mA

-W3 - 44W / 1150 mA

CCT:

-K30 - 3000K

-K40 - 4000K

CRI:

-C80 - 80

-C90 - 90

Beam Angle & lumens:

For 27W model:

-B1 - 25.1° = 2499 lm

-B2 - 37.4° = 2573 lm

For 44W model:

-B1 - 25.2° = 3840 lm

-B2 - 30.7° = 3923 lm

Finish options:

-WL - White

-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:




sales@gordonbullard.com

www.byiba.com



1 877-964-4646

PHOTOMETRICS:



For -65160-01 model

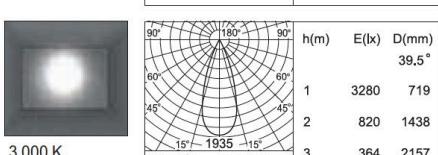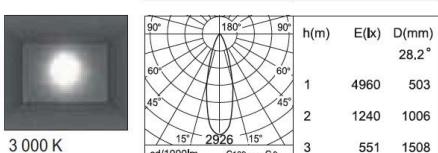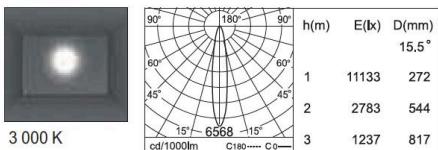



For -65160-02 model

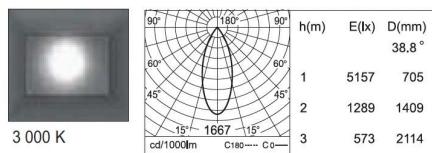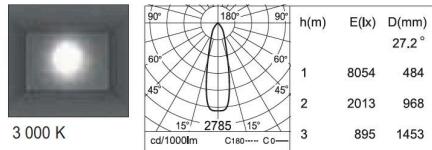




For -65180 model - 20W

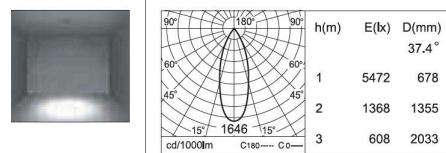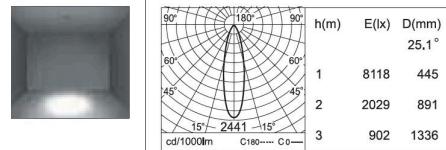




For -65180 model - 44W

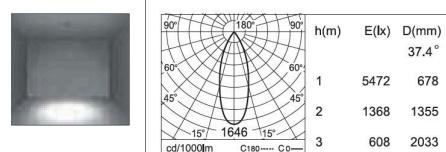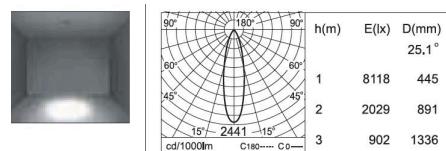




For -65170 model - 20W






For -65171 model - 20W



For -65170 model - 28W

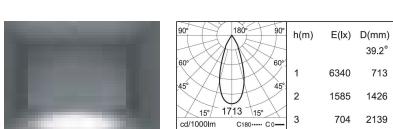

For -65171 model - 27W

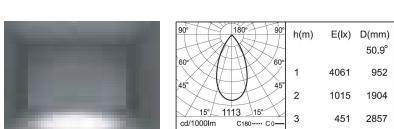

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com

www.byiba.com



1 877-964-4646

ACCESSORIES FOR 1CIRCUIT TRACK:


-105
Feed-in Cap
-BL - Black
-WH - White

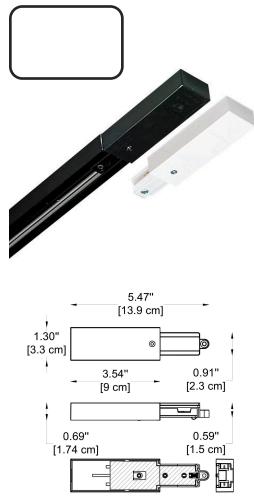

-111
X Connector
-BL - Black
-WH - White

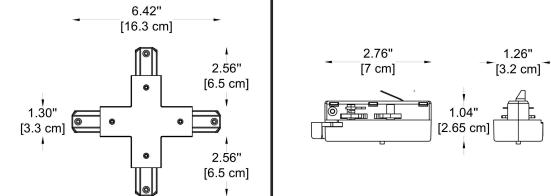


-106
End Cap
-BL - Black
-WH - White

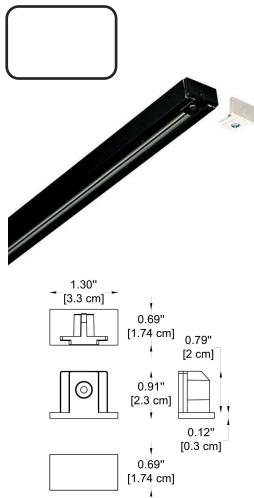


-153
Adapter
-BL - Black
-WH - White




-107
Straight Connector
-BL - Black
-WH - White

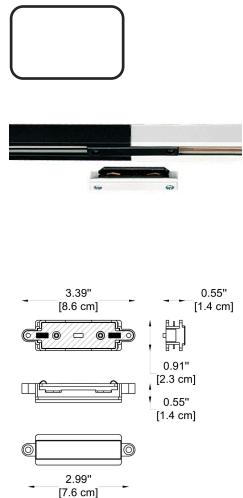

-108
L Connector
-BL - Black
-WH - White

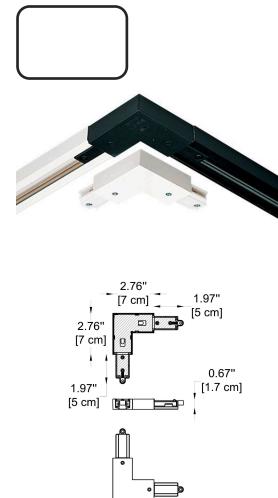

-110
T Connector
-BL - Black
-WH - White

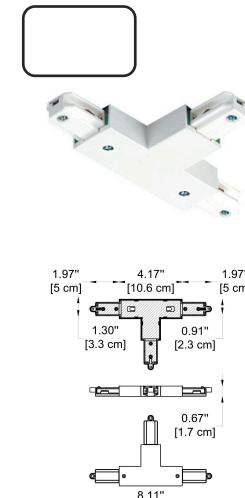

HOW TO ORDER:

Example:
CODE: 105-WH

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE




CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646


WE WELCOME ALL CUSTOM ORDERS

ACCESSORIES FOR 3CIRCUIT TRACK:


-305
Feed-in Cap
- BL - Black
- WH - White




-311
X Connector
- BL - Black
- WH - White




-306
End Cap
- BL - Black
- WH - White




-307
Straight Connector
- BL - Black
- WH - White





-308
L Connector
- BL - Black
- WH - White



-310
T Connector
- BL - Black
- WH - White



-351
Adapter
- BL - Black
- WH - White



HOW TO ORDER:

Example:
CODE: -305-BL

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS