

CAMBIO COLLECTION (magnetic track)

BY-CMBC-TC

PROJECT

SPEC TYPE

NOTES

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

GENERAL INFORMATION:

The Cambio Track Collection offers a modern DC Track System with three profile options: Surface-Mounted S, Surface-Mounted L, and Recessed. Available in black and white finishes, the system comes in lengths of 39.4", 78.7", and 118". It features pendant lights from the Ciambo series, with up to 3 customizable pieces. LED lighting options include CCT of 3000K, 4000K, or 5000K, with CRI of 80 or 90. Crafted from durable aluminum with an electrostatic powder coating, this collection is perfect for versatile and stylish indoor lighting.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black

LIGHTING:

LED

VOLTAGE:

Low Voltage Track (48V)

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:




sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

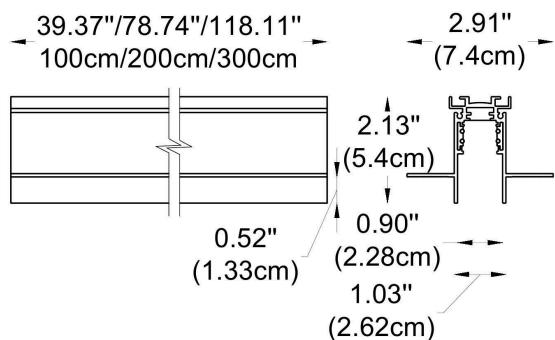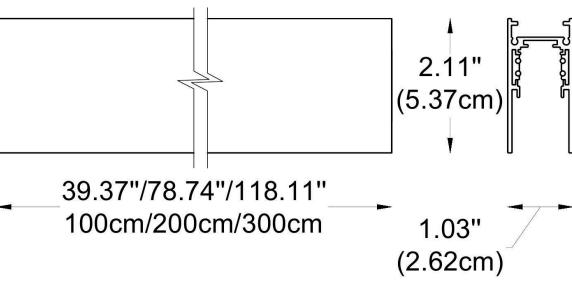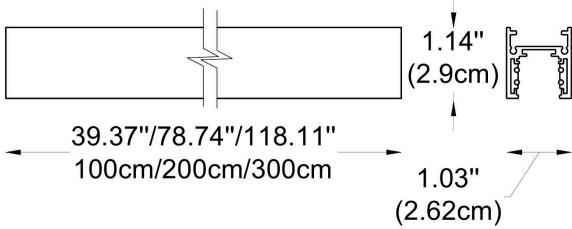

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-CMBC-TC-1-01-BL

CODE FOR TRACK HEAD: 65560-01-K30-C80-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

BY-CMBC-
TC-1-01-BL

1 CHOOSE TRACK MODEL:

Surface-Mounted S profile



-1-01 L: 39.4" (100 cm)

-1-02 L: 78.7" (200 cm)

-1-03 L: 118" (300 cm)

Surface-Mounted L profile



-2-01 L: 39.4" (100 cm)

-2-02 L: 78.7" (200 cm)

-2-03 L: 118" (300 cm)

Recessed profile



-3-01 L: 39.4" (100 cm)

-3-02 L: 78.7" (200 cm)

-3-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

-BL Black
-WH White

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

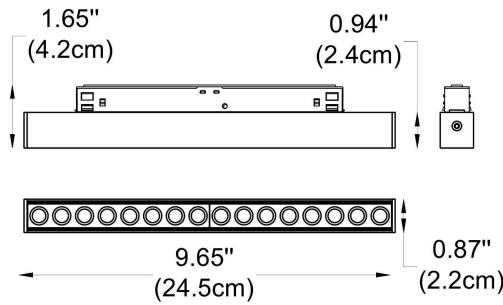
WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-CMBC-TC-1-01-BL

CODE FOR TRACK HEAD: 65560-01-K30-C80-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65560-01**

Dimensions: L: 9.65" (24.5 cm) x H: 0.87" (2.2 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Cover: Lens

Light Source: LED (SMD)

Power: 12W

Lumens: 698 lm (3000K)

Output Current: 350 mA

CCT: **K30** - 3000K**K40** - 4000K**K50** - 5000KCRI: **C80** - 80**C90** - 90Finish options: **-WL** - White**-BL** - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

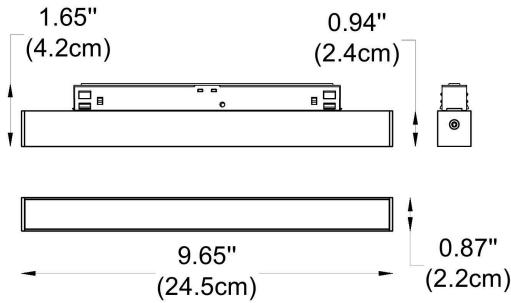

0.2 kg

White

Black

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-CMBC-TC-1-01-BL

CODE FOR TRACK HEAD: 65560-01-K30-C80-WL

CODE FOR ACCESSORIES: 505-BL

CODE:

65020-03-
K30-C80-B1-
WL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65560-02**

Dimensions: L: 9.65" (24.5 cm) x H: 0.87" (2.2 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Cover: PC

Light Source: LED (SMD)

Power: 10W

Output Current 350 mA

CCT: **K30** - 3000K**K40** - 4000K**K50** - 5000KCRI: **C80** - 80**C90** - 90Finish options: **-WL** - White**-BL** - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-CMBC-TC-1-01-BL

65560-01-K30-C80-WL

CODE FOR TRACK HEAD: 65560-01-K30-C80-WL

CODE FOR ACCESSORIES: 505-BL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **59100**

Dimensions: L: 38" (96.6 cm) x H: 0.87" (2.2 cm) x W: 0.91 (2.3cm)

Housing: AL. Extrude & AL. Die-Casting,
Electrostatic Powder Coating

Cover PC

Light Source: LED (SMD)

Power: 28W

Lumens: 1 924 lm (3000K)

CCT: **-K30** - 3000K

-K40 - 4000K

-K50 - 5000K

CRI: **-C80** - 80

-C90 - 90




Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

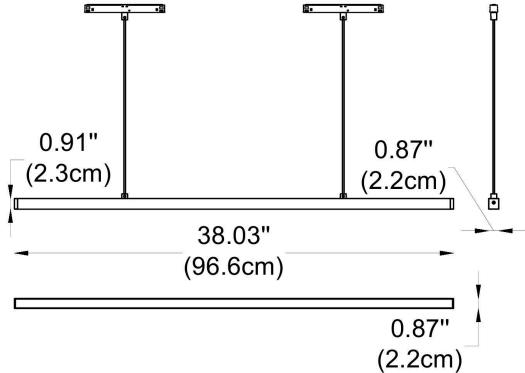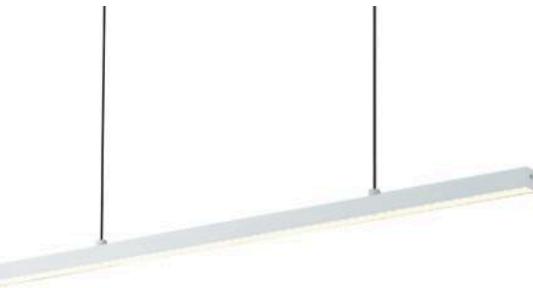

LED **110-277V** **IP20**

W 0.7 kg

White
 Black

WWW.BULLARDCOLLECTION.COM

[TECHNICAL](#)

[OUTDOOR](#)

[DECORATIVE](#)



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

HOW TO ORDER (accessories):

CODE:

Example:

CODE FOR ACCESSORIES: 505-BL-507-WH-552BL


505-BL-507-
WH-552BL

4

ACCESSORIES:


-505
Feed-in Cap

-BL - Black
-WH - White




-506-02
End Cap

-BL - Black
-WH - White




-508
L Connector

-BL - Black
-WH - White




-551
Adapter

-BL - Black
-WH - White




-506-01
End Cap

-BL - Black
-WH - White




-507
Straight Connector

-BL - Black
-WH - White



-512
Flexible Connector

-BL - Black
-WH - White



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646