



ISSIMO
(track)

BY-SSM-TC

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The ISSIMO Non-Magnetic Track system is available in 1-Circuit and 3-Circuit track profiles, with three length options: 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). It operates at 110-277V and is constructed from aluminum with an electrostatic powder coating in either white or black finishes.

The spotlight measures Ø 4.53" (11.5 cm) x H 8.95" (22.7 cm) and is available in 20W, 28W, 41W, or 56W options. The reflector is made from anodized specular silver, or it can be paired with a lens. CCT options include 3000K or 4000K, with CRI choices of 80 or 90, available in white, black, or gray finishes.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black, Gray

LIGHTING:

LED

VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

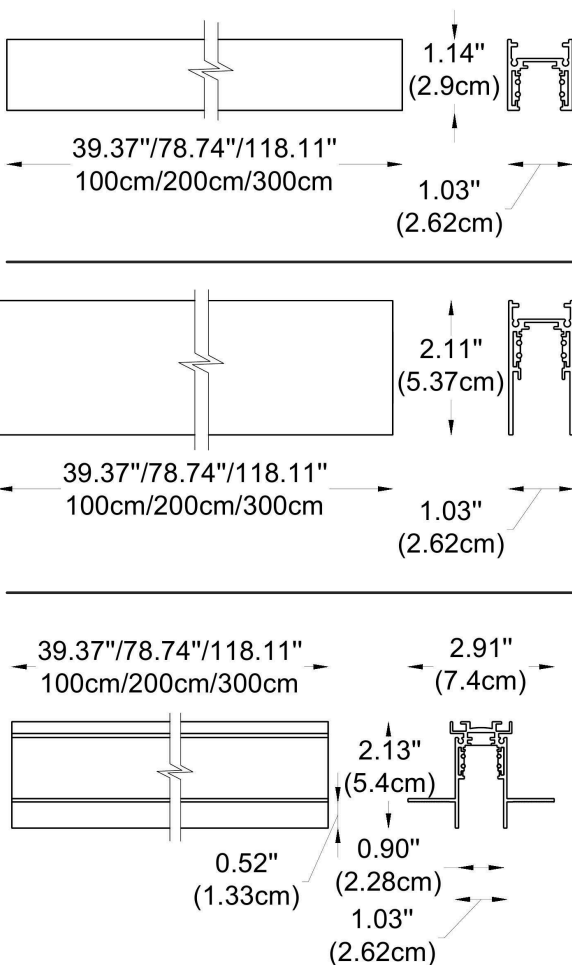

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-SSM-TC-1-01-BL

CODE FOR TRACK HEAD: 651-W0-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

BY-SSM-TC-1-01-BL

1 CHOOSE TRACK MODEL:

1-Circuit Track Profile




-1-01 L: 39.4" (100 cm)

-1-02 L: 78.7" (200 cm)

-1-03 L: 118" (300 cm)

3-Circuit Track Profile

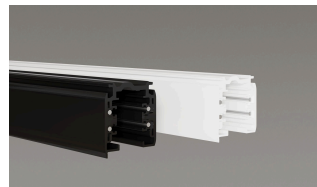

-2-01 L: 39.4" (100 cm)

-2-02 L: 78.7" (200 cm)

-2-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

-BL Black
-WH White



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

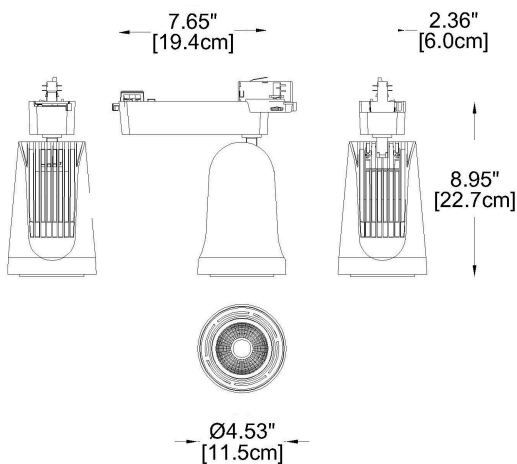

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-SSM-TC-1-01-BL

CODE FOR TRACK HEAD: 651-W0-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

651-W0-K30-C80-B1-WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-651**

Dimensions: Ø: 4.53" (11.5 cm) x H: 8.95" (22.7 cm)

Housing: AL. Die-Casting, Electrostatic Powder Coating

Reflector: AL. Anodized Specular Silver

Gear Box: AL. Die-Casting, Electrostatic Powder Coating

Light Source: LED (COB)

Power & Currents: **-W0** - 20W / 500 mA

-W1 - 28W / 700 mA

-W2 - 41W / 1050 mA

-W3 - 56W / 1400 mA

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle & lumens: For 20W model:

-B1 - 25.5° = 2244 lm

-B2 - 38.9° = 2284 lm

For 28W model:

-B1 - 26.0° = 3000 lm

-B2 - 39.0° = 3056 lm

For 41W model:

-B1 - 25.3° = 3788 lm

-B2 - 37.5° = 3880 lm

For 51W model:

-B1 - 23.3° = 4869 lm

-B2 - 39.3° = 4835 lm

Finish Options:

-WL - White

-BL - Black

-GR - Gray



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

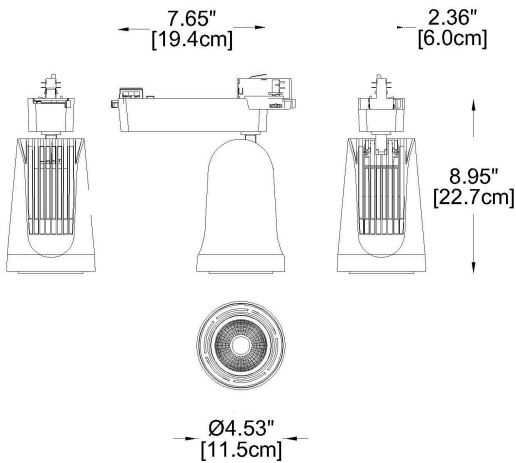

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-SSM-TC-1-01-BL

CODE FOR TRACK HEAD: 651-W0-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

651-W0-K30-C80-B1-WL

PHOTOMETRICS:

20W MODEL



	h(m)	E(lx)	D(mm)
1	8470	453	25.5°
2	2118	905	
3	941	1358	



	h(m)	E(lx)	D(mm)
1	4780	705	38.9°
2	1195	1411	
3	531	2116	

28W MODEL

	h(m)	E(lx)	D(mm)
1	10984	461	26.0°
2	2746	923	
3	1220	1384	

	h(m)	E(lx)	D(mm)
1	6340	713	39.2°
2	1585	1426	
3	704	2139	

41W MODEL



	h(m)	E(lx)	D(mm)
1	12381	449	25.3°
2	3095	898	
3	1376	1347	



	h(m)	E(lx)	D(mm)
1	8266	680	37.5°
2	2067	1359	
3	918	2039	

56W MODEL

	h(m)	E(lx)	D(mm)
1	21807	412	23.3°
2	5452	824	
3	2423	1236	

	h(m)	E(lx)	D(mm)
1	11225	713	39.3°
2	2806	1427	
3	1247	2140	

LED



IP20



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com

www.byiba.com


1 877-964-4646

ACCESSORIES FOR 1 CIRCUIT TRACK:


-105
Feed-in Cap
-BL - Black
-WH - White

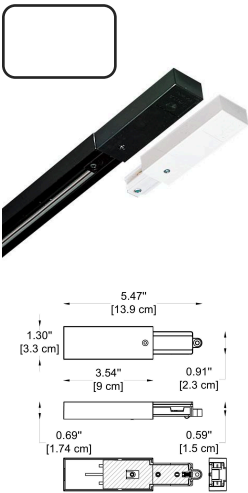


-106
End Cap
-BL - Black
-WH - White

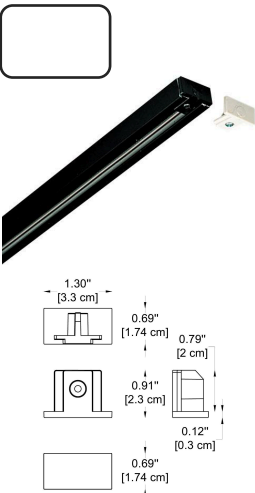


-107
Straight Connector
-BL - Black
-WH - White

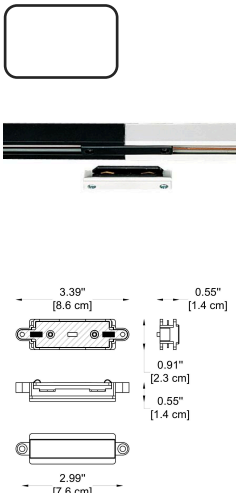


-108
L Connector
-BL - Black
-WH - White

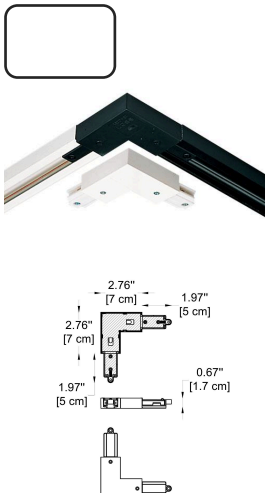

-110
T Connector
-BL - Black
-WH - White

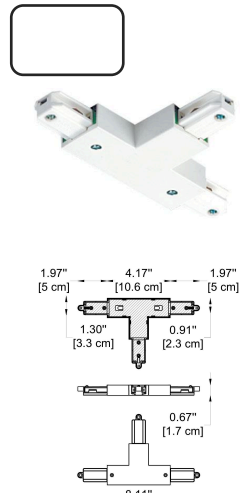

-111
X Connector
-BL - Black
-WH - White

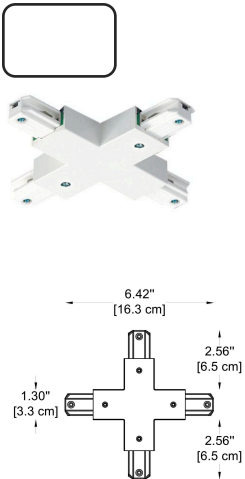

-153
Adapter
-BL - Black
-WH - White



HOW TO ORDER:

Example:
CODE: 105-WH

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE




WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com
www.byiba.com
1 877-964-4646

ACCESSORIES FOR 3CIRCUIT TRACK:


-305
Feed-in Cap
-BL - Black
-WH - White

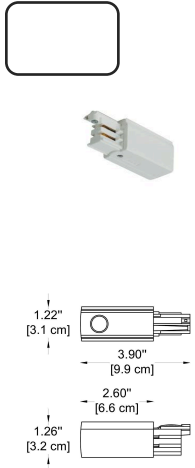


-306
End Cap
-BL - Black
-WH - White

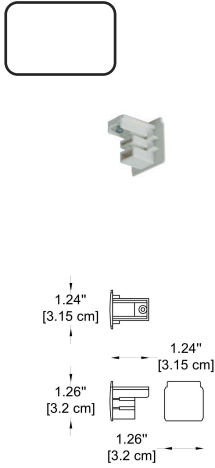


-307
Straight Connector
-BL - Black
-WH - White

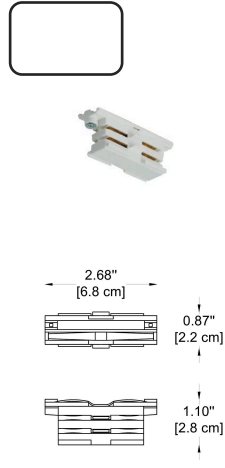


-308
L Connector
-BL - Black
-WH - White

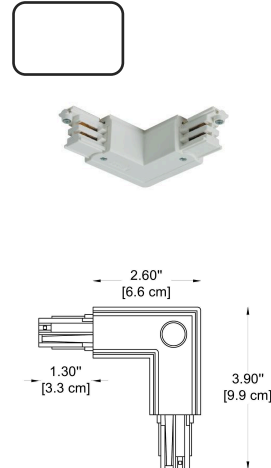


-310
T Connector
-BL - Black
-WH - White

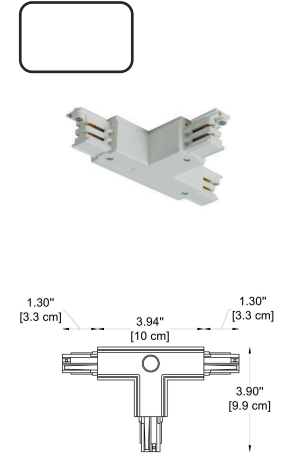

-311
X Connector
-BL - Black
-WH - White

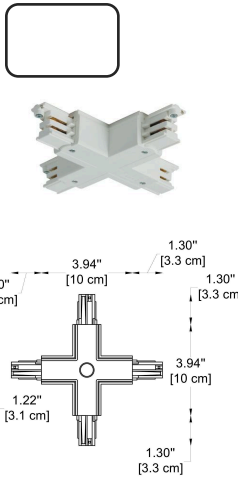

-351
Adapter
-BL - Black
-WH - White

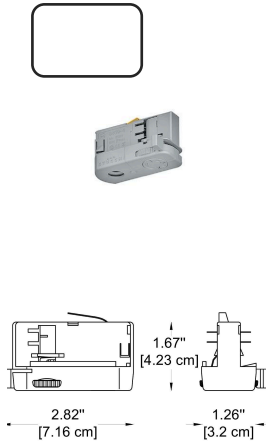

HOW TO ORDER:

Example:
CODE: -305-BL

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646