

BYIBA
L I G H T




NEON
(magnetic track system)

BY-TLSR-NMT

PROJECT

SPEC TYPE

NOTES

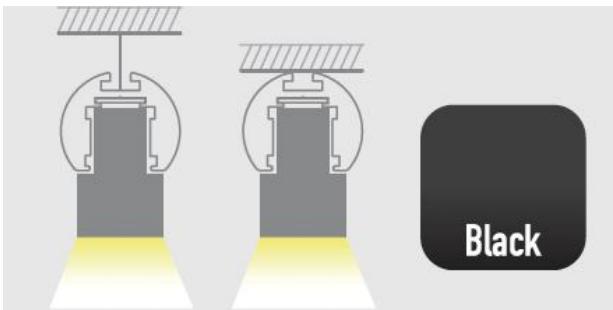**GENERAL INFORMATION:**

Neon track is available as suspended and surface-mounted versions, the track can rotate horizontally, and the system also offers the option of different linear modules include diffuser, prismatic, in addition, spotlight, downlight and neon strip. These modules can be combined freely for different applications, at the same time, the track and the neon strip module can be creatively matched to achieve various rich stylings. The track system is operated with 48VDC, 1.18" (30 mm) diameter, small and exquisite.

MATERIAL:

Metal

FINISHING:

Black

LIGHTING:

LED

INPUT VOLTAGE:

48VDC

IP RATING:

20

MAXIMUM LOAD:

350W

PROFILES FINISH OPTION:

Black

MODULES FINISH OPTION:

Black

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

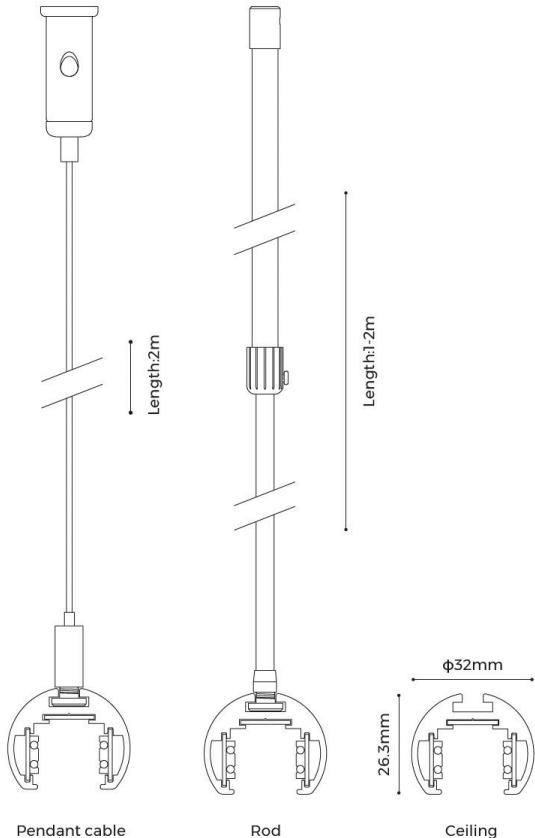

LED



IP20

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

BY-TLSR-NMT-SC-01-100P

1 INSTALLATION TYPE:

- SC Suspension with pendant cable
- SR Suspension with rod
- SM Surface-Mounted

2 DIMENSIONS:

- 01 A) Diameter - Ø: 1.20" (3 cm)
B) Length - H: 39.4" (100 cm)
- 02 A) Diameter - Ø: 1.20" (3 cm)
B) Length - H: 78.7" (200 cm)
- 03 A) Diameter - Ø: 1.20" (3 cm)
B) Length - H: 118" (300 cm)

3 POWER SUPPLY:

- 100P 100W
- 150P 150W
- 250P 250W

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com

www.byiba.com

1 877-964-4646

CODE:

SPOTLIGHTS MODULES

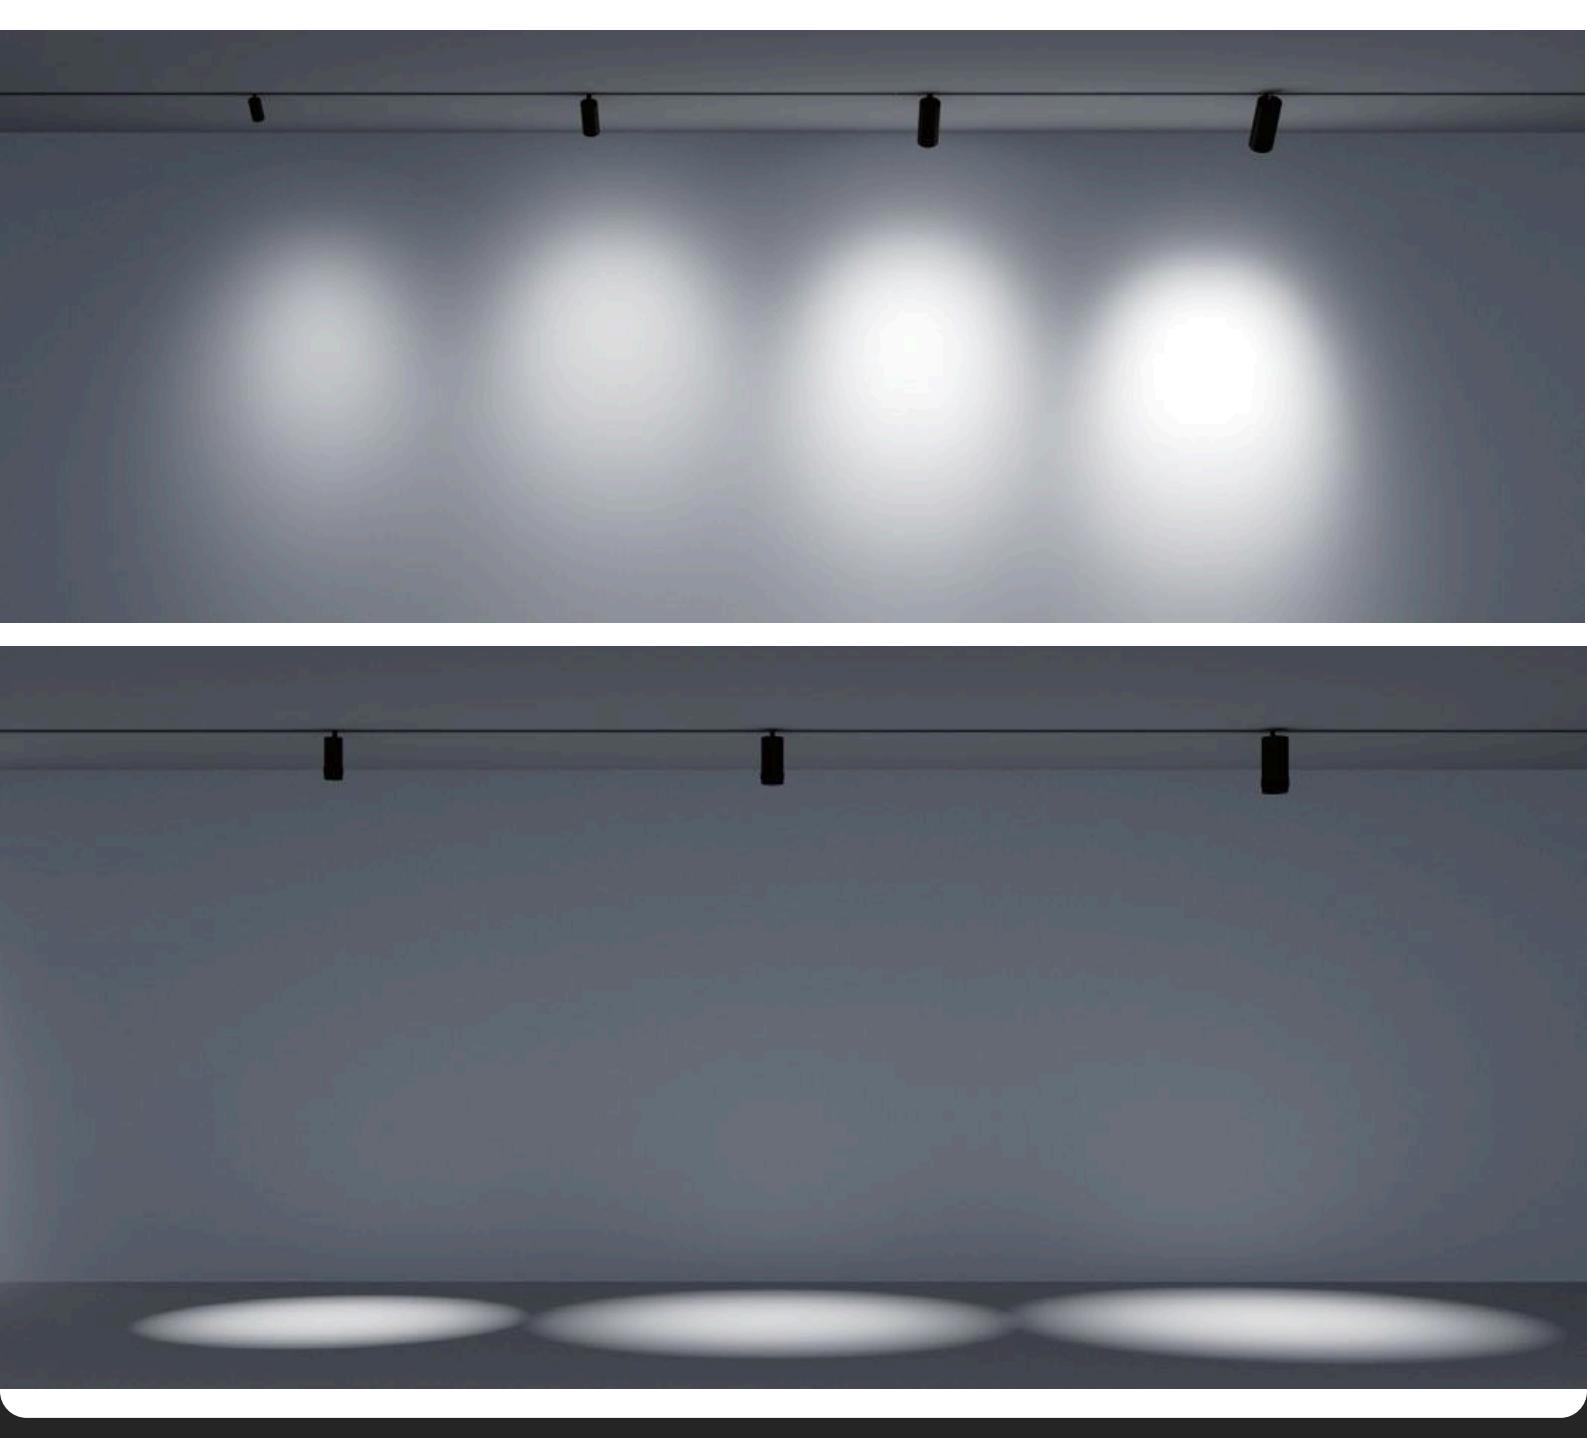

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

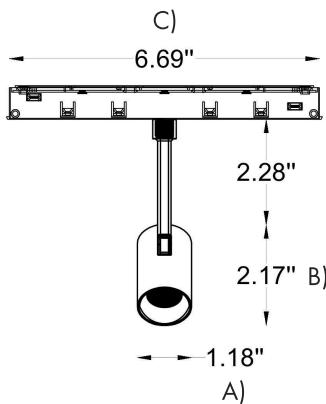

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20S-30

Dimensions:

A) Diameter - Ø: 1.18" (3 cm)

B) Height - H: 2,17" (5,5 cm)

C) Length - L: 6,7" (17 cm)

Diffuser:

Lens

Luminous flux:

225 lm

Typ. power

3W

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

-B24

24°



-B36

36°



Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable



-DL

Dali



-LU

Lutron



-CA

Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES

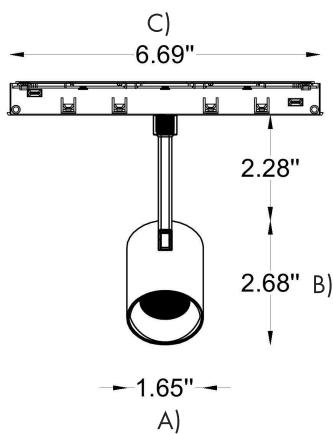

LED **48 VDC** **IP20** **LUTRON** **CASAMBI**



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20S-42

Dimensions:

A) Diameter - Ø: 1.65" (4.2 cm)

B) Height - H: 2,68" (6,8 cm)

C) Length - L: 6,7" (17 cm)

Diffuser:

Lens

Luminous flux:

500 lm

Typ. power

6W

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

-B24

24°



-B36

36°



Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable



-DL

Dali



-LU

Lutron



-CA

Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES

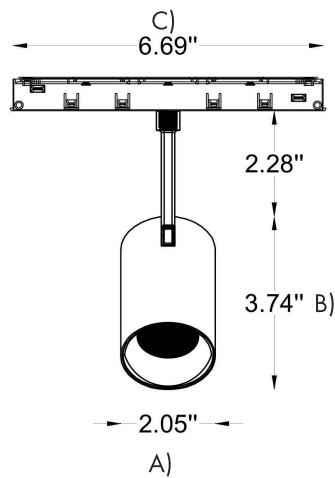

LED **48 VDC** **IP20** **LUTRON** **CASAMBI**



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20S-52

Dimensions:

A) Diameter - Ø: 2.05" (5.21 cm)

B) Height - H: 3.74" (9.5 cm)

C) Length - L: 6.7" (17 cm)

Diffuser:

Lens

Luminous flux:

820 lm

Typ. power

10W

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

-B24

24°



-B36

36°



Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable



-DL

Dali



-LU

Lutron



-CA

Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

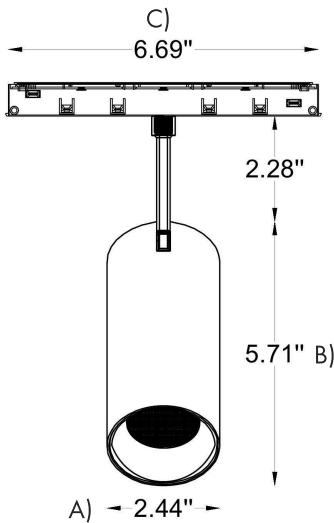

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20S-62

Dimensions:

A) Diameter - Ø: 2.44" (6.2 cm)

B) Height - H: 5.71" (14.5 cm)

C) Length - L: 6.7" (17 cm)

Diffuser:

Lens

Luminous flux:

1200 lm

Typ. power

15W

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

-B15

15°



-B24

24°



-B36

36°



Input voltage: 48VDC

Dimming:

-NON

Non-Dimmable



-DL

Dali



-LU

Lutron



-CA

Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

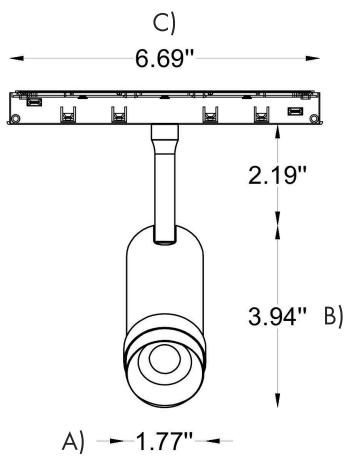

A) 1.77"



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20SZ-45

Dimensions:

A) Diameter - Ø: 1.77" (4.5 cm)

B) Height - H: 3,94" (10 cm)

C) Length - L: 6,7" (17 cm)

Diffuser:

Lens

Luminous flux:

250 lm

Typ. power

5W

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

12° - 50°(zoom)

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

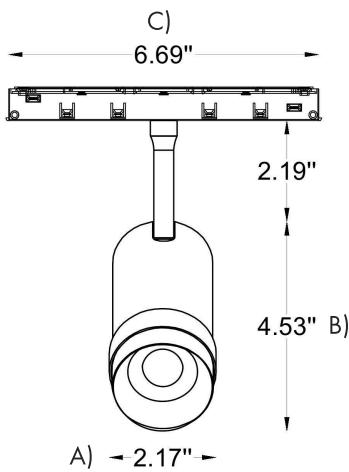

A) 2.17"

C) 6.69"

B) 4.53"

2.19"



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20SZ-55

Dimensions:

A) Diameter - Ø: 2.17" (5.5 cm)

B) Height - H: 3,94" (11.53" cm)

C) Length - L: 6,7" (17 cm)

Diffuser:

Lens

Luminous flux:

500 lm

Typ. power

8W

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

15° - 40° (zoom)

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

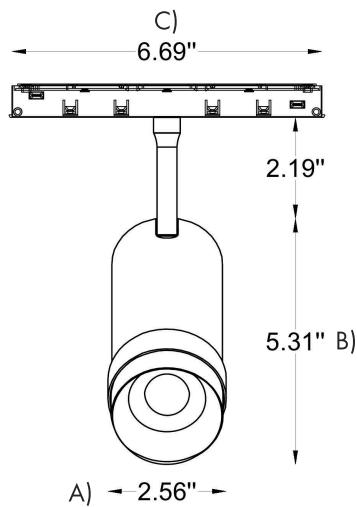

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20SZ-65

Dimensions:

A) Diameter - Ø: 2.17" (6.5 cm)

B) Height - H: 5.31" (13.5" cm)

C) Length - L: 6.7" (17 cm)

Diffuser:

Lens

Luminous flux:

700 lm

Typ. power

12W

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

15° - 36°(zoom)

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com

www.byiba.com

1 877-964-4646

CODE:

LINEAR MODULES

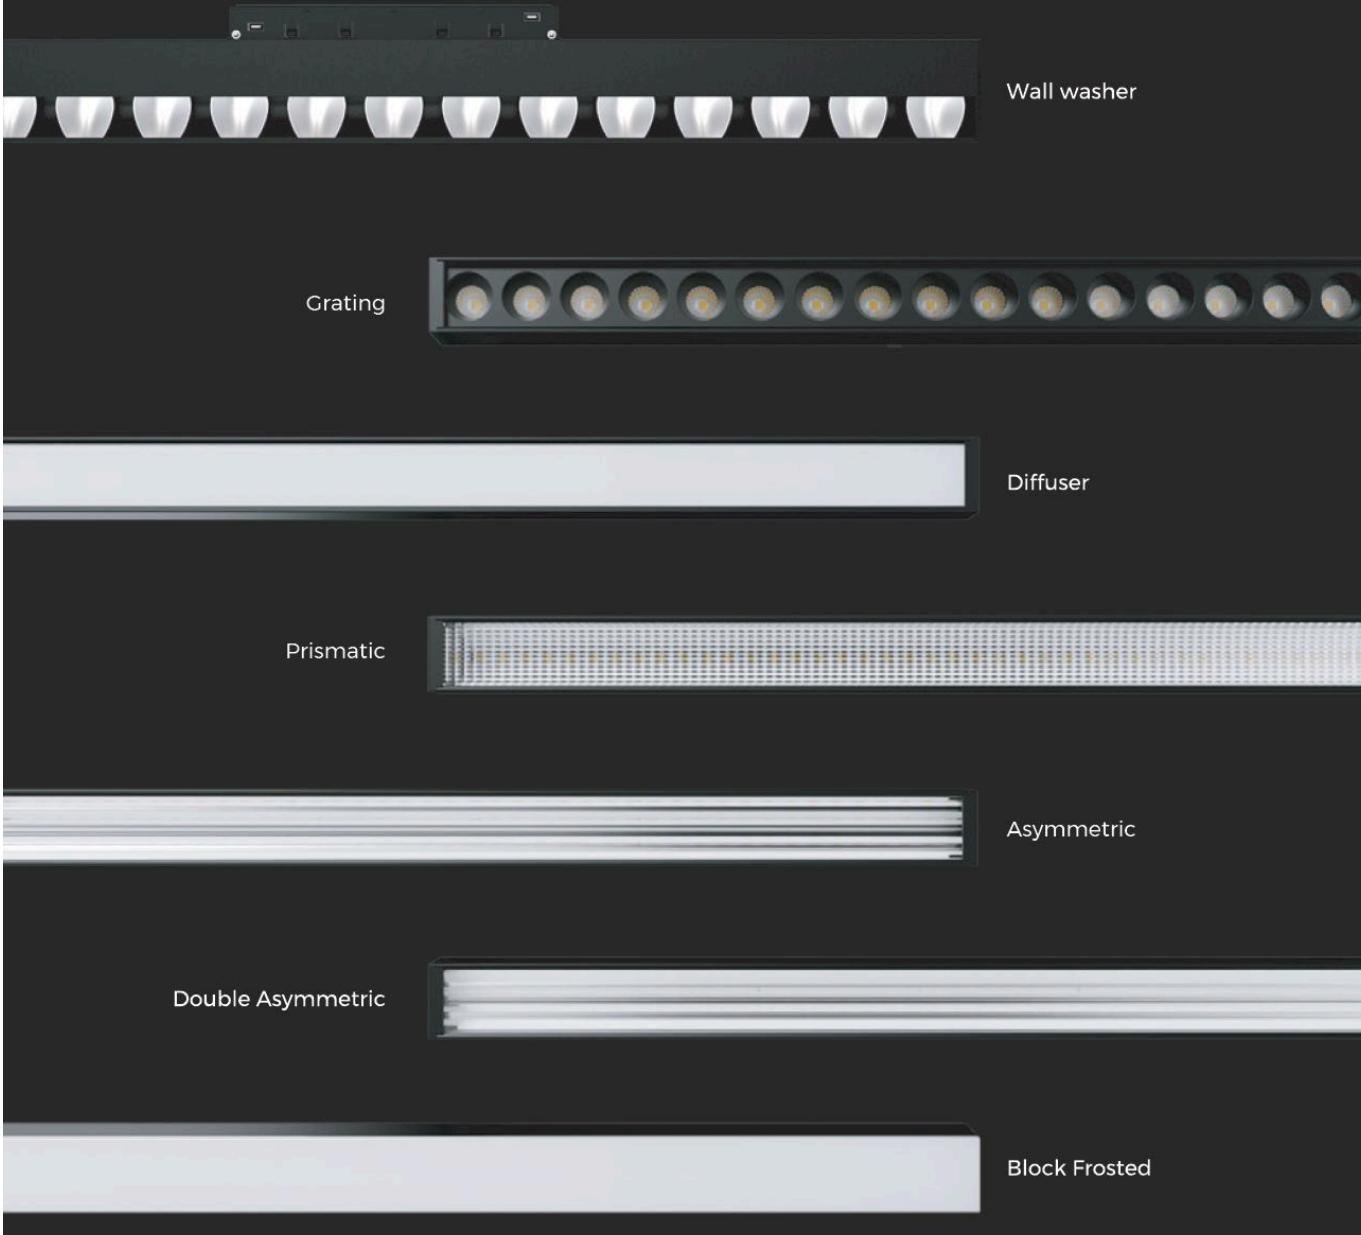WWW.BYIBA.COM[TECHNICAL](#)[OUTDOOR](#)[DECORATIVE](#)

WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

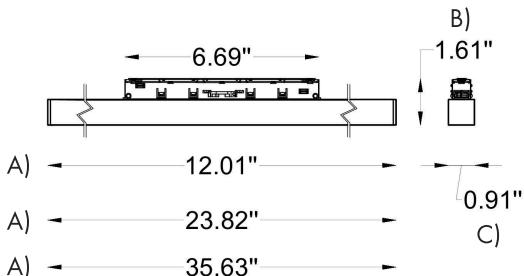WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20FD

Dimensions:

A) Length - **-L1** L: 12" (30.5 cm)
-L2 L: 23.82" (60.5 cm)
-L3 L: 35.63" (90.5 cm)

B) Height - H: 1.61" (4.1 cm)
C) Width - W: 0.91" (2.31 cm)

Diffuser:

Diffuser

Light Source:

-LS1 LED / 7W / 490 lm
-LS2 LED / 14W / 980 lm
-LS3 LED / 20W / 1400 lm

CCT:

-K27 2700K
-K30 3000K
-K40 4000K

CRI:

>90

Beam Angle:

100°

Input voltage:

48VDC

Dimming:

-NON Non-Dimmable
-DL Dali
-LU Lutron
-CA Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

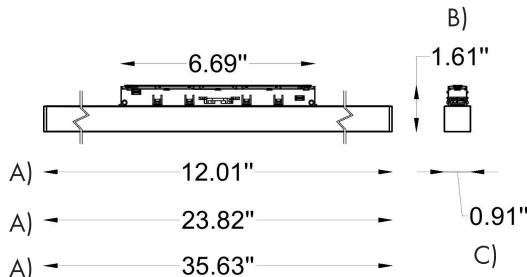WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20FP

Dimensions:

A) Length -

-L1 L: 12" (30.5 cm)

-L2 L: 23.82" (60.5 cm)

-L3 L: 35.63" (90.5 cm)



B) Height -

H: 1.61" (4.1 cm)

C) Width -

W: 0.91" (2.31 cm)

Diffuser:

Prismatic

Light Source:

-LS1 LED / 7W / 525 lm



-LS2 LED / 14W / 1050 lm



-LS3 LED / 20W / 1500 lm



CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

65°x90°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable



-DL

Dali



-LU

Lutron



-CA

Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

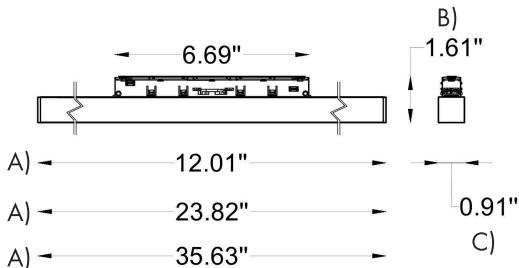WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20LA

Dimensions:

A) Length -

-L1 L: 12" (30.5 cm)

-L2 L: 23.82" (60.5 cm)

-L3 L: 35.63" (90.5 cm)

B) Height -

H: 1.61" (4.1 cm)

C) Width -

W: 0.91" (2.31 cm)

Diffuser:

Lens (Asymmetric)

Light Source:

-LS1 LED / 7W / 700 lm

-LS2 LED / 14W / 1400 lm

-LS3 LED / 20W / 2000 lm

CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

90° x45° x15°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

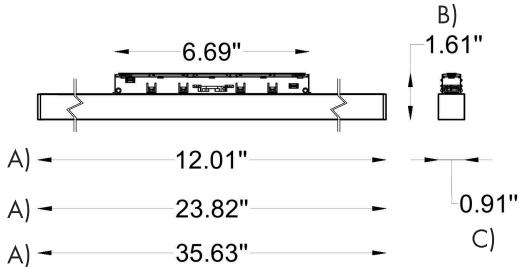

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20LS

Dimensions:

A) Length -

-L1 L: 12" (30.5 cm)

-L2 L: 23.82" (60.5 cm)

-L3 L: 35.63" (90.5 cm)

B) Height -

H: 1.61" (4.1 cm)

C) Width -

W: 0.91" (2.31 cm)

Diffuser:

Lens (Double asymmetric)

Light Source:

-LS1 LED / 7W / 700 lm

-LS2 LED / 14W / 1400 lm

-LS3 LED / 20W / 2000 lm

CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

100° x 90° x 15°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

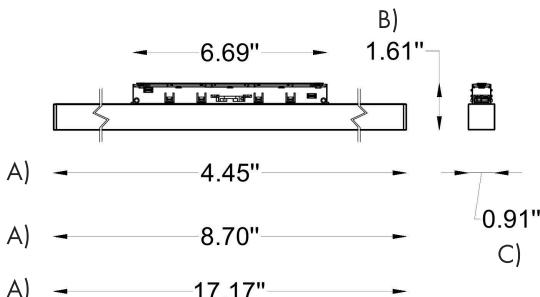WWW.BULLARDCOLLECTION.COM[TECHNICAL](#)[OUTDOOR](#)[DECORATIVE](#)

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20G

Dimensions:

A) Length -

-L1 L: 4.45" (11.3 cm)

-L2 L: 8.7" (22.1 cm)

-L3 L: 17.17" (43.61 cm)

B) Height -

H: 1.61" (4.1 cm)

C) Width -

W: 0.91" (2.31 cm)

Diffuser:

Grating

Light Source:

-LS1 LED / 6W / 470 lm

-LS2 LED / 12W / 940 lm

-LS3 LED / 24W / 1800 lm

CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

-B1 30°

-B2 55°

Input voltage:

48VDC

Dimming:

-NON Non-Dimmable

-DL Dali

-LU Lutron

-CA Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:



sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

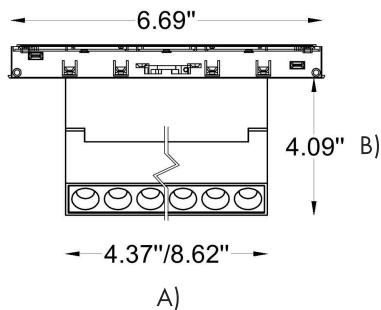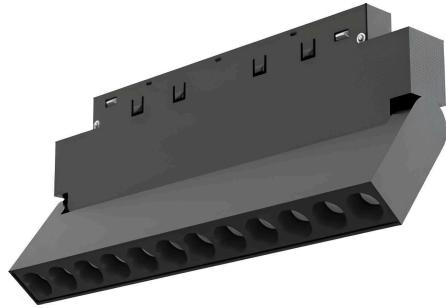

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20G-A

Dimensions:

A) Length -

-L1

L: 4.37" (11.1 cm)

-L2

L: 8.62" (21.92 cm)

B) Height -

H: 4.1" (10.4 cm)

Diffuser:

Grating

Light Source:

-LS1 LED / 6W / 420 lm

-LS2 LED / 12W / 940 lm



CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

-B1 30°

-B2 40°



Input voltage:

48VDC

Dimming:

-NON Non-Dimmable

-DL Dali

-LU Lutron

-CA Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range -

-20 to +40°C

Maintenance of lumen - L80 -

50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

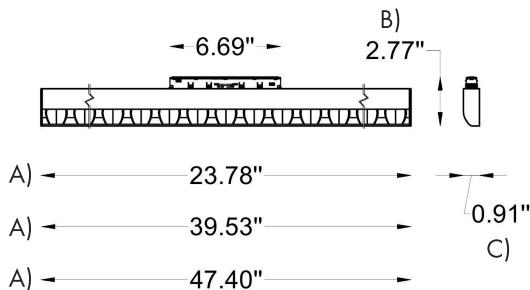

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20GW

Dimensions:

A) Length -

-L1 L: 23.78" (60 cm)

-L2 L: 39.53" (100 cm)

-L3 L: 47.40" (120 cm)

B) Height -

H: 2.77" (7.3 cm)

C) Width -

W: 0.91" (2.31 cm)

Diffuser:

Lens

Light Source:

-LS1 LED / 10W / 900 lm

-LS2 LED / 15W / 1350 lm

-LS3 LED / 20W / 1800 lm

CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

-B1 60°

-B2 75°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

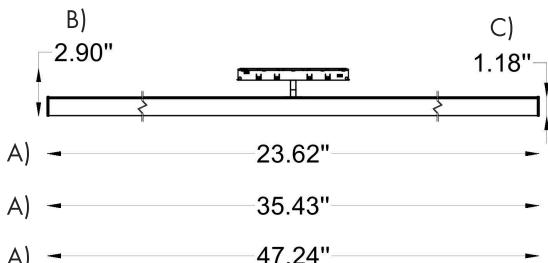

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20CD

Dimensions:

A) Length -

-L1 L: 23.62" (60 cm)

-L2 L: 35.43" (100 cm)

-L3 L: 47.24" (120 cm)

B) Height -

H: 2.9" (7.4 cm)

C) Diameter -

Ø: 1.81" (3 cm)

Diffuser:

PC

Light Source:

-LS1 LED / 12W / 1200 lm

-LS2 LED / 18W / 1800 lm

-LS3 LED / 24W / 2400 lm

CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

-B1 150°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com

www.byiba.com

1 877-964-4646

CODE:

DECORATIVE MODULES

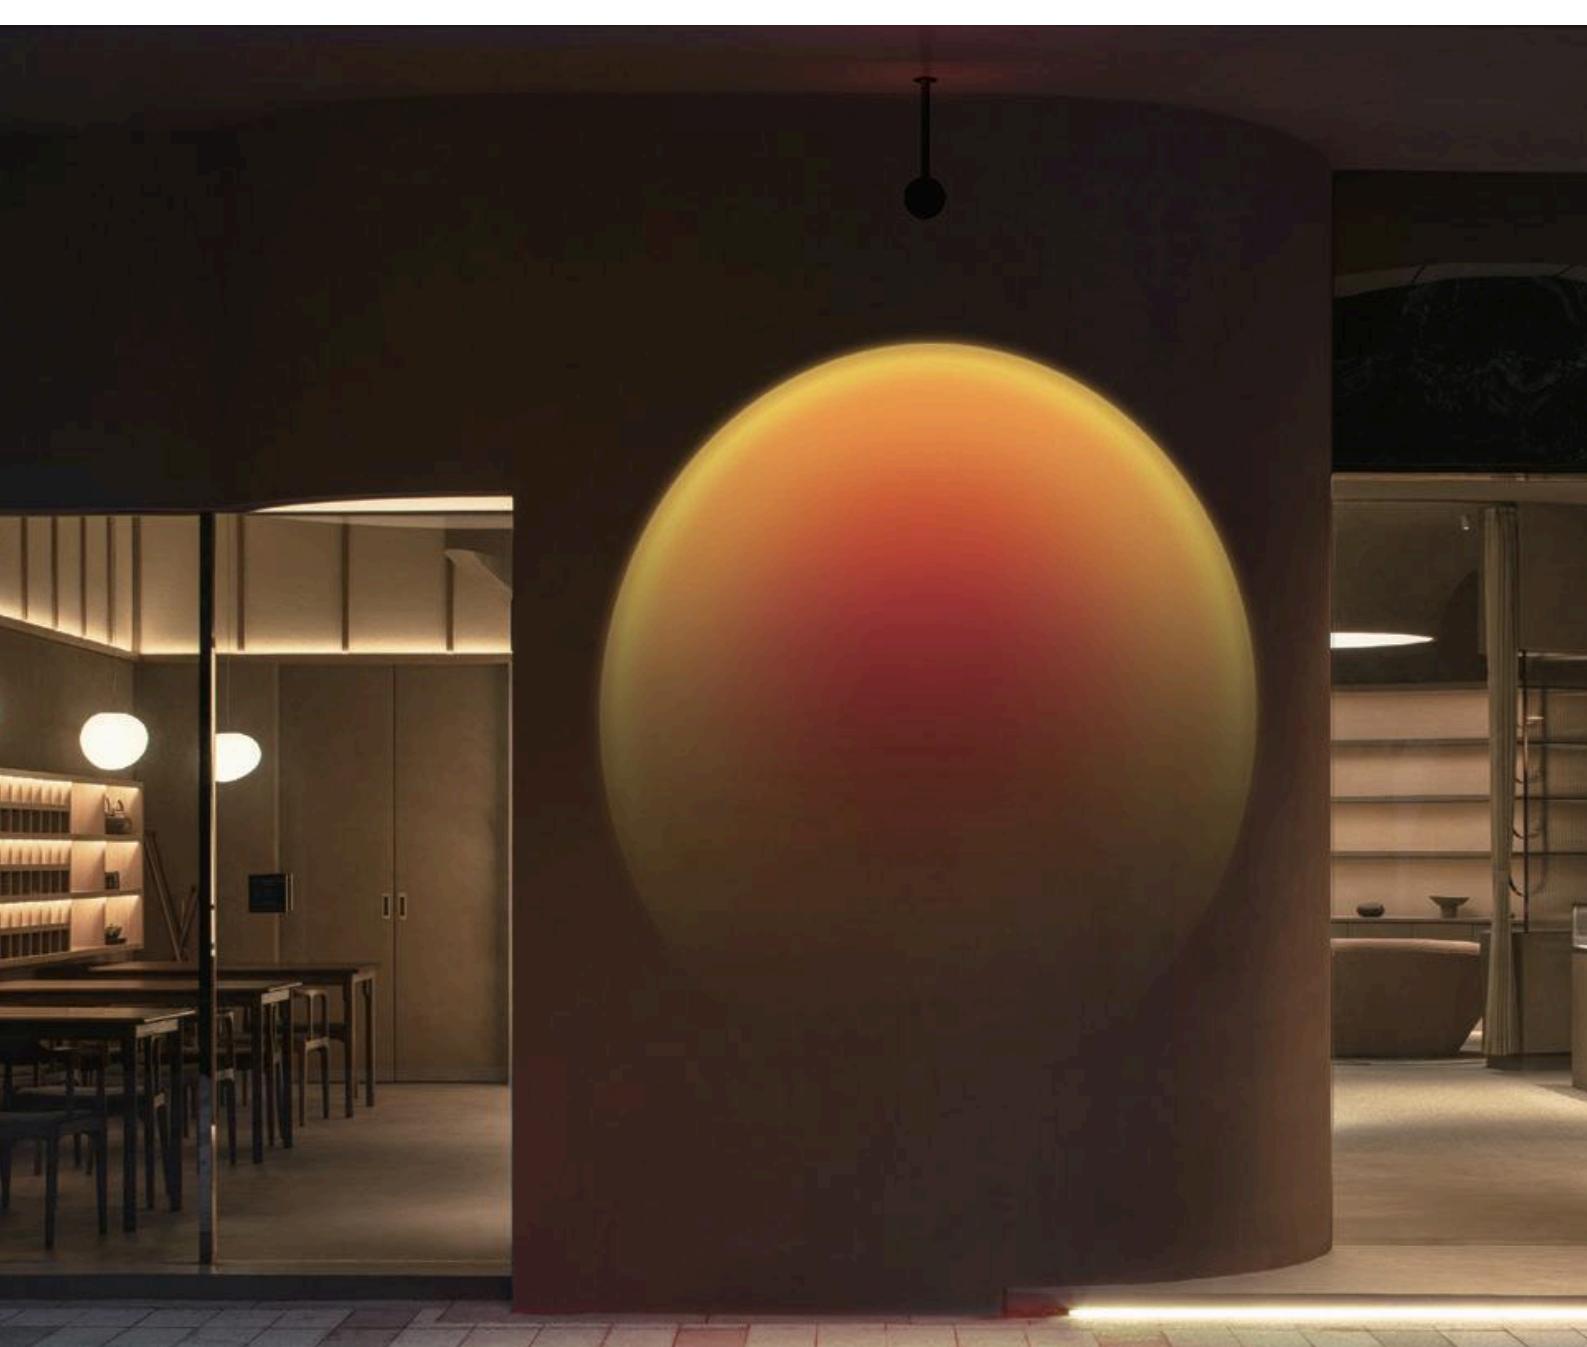

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

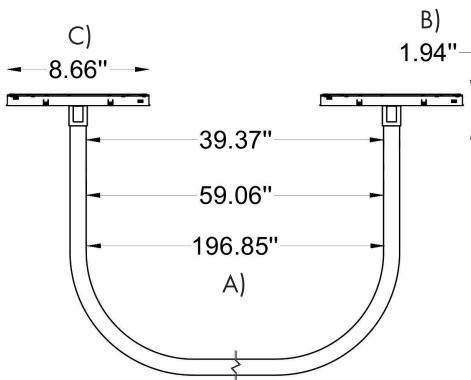

LED **48 VDC** **IP20** **OLUTRON** **CASAMBI**



WWW.BULLARDCOLLECTION.COM

[TECHNICAL](#)

[OUTDOOR](#)

[DECORATIVE](#)

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20NK-25

Dimensions:

A) Length -

-L1 L: 39.37" (100 cm)**-L2** L: 59.06" (150 cm)**-L3** L: 196.85" (500 cm)

B) Height -

H: 1.94" (4.93 cm)

C) Length -

L: 8.66" (22 cm)

Diffuser:

Silicone Neon

Light Source:

-LS1 LED / 14W / 910 lm**-LS2** LED / 35W / 2275 lm**-LS3** LED / 70W / 4550 lm

CCT:

-K27 2700K**-K30** 3000K**-K40** 4000K

CRI:

>90

Beam Angle:

B1 100°

Input voltage:

48VDC

Dimming:

-NON Non-Dimmable**-DL** Dali**-LU** Lutron**-CA** Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

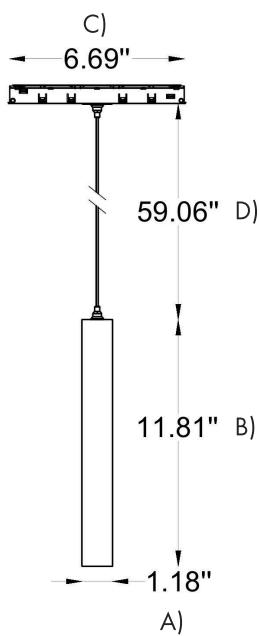

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20I-30

Dimensions:

A) Diameter - Ø: 1.18" (3 cm)

B) Height - H: 11.81" (30 cm)

C) Length - L: 6.69" (17 cm)

D) Cable - L: 59.06" (150 cm)

Diffuser:

Spotlight

Light Source:

LED / 5W / 330 lm

CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

-B1 24°



-B2 36°



Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable



-DL



Dali




-LU



PROJECT

SPEC TYPE

NOTES

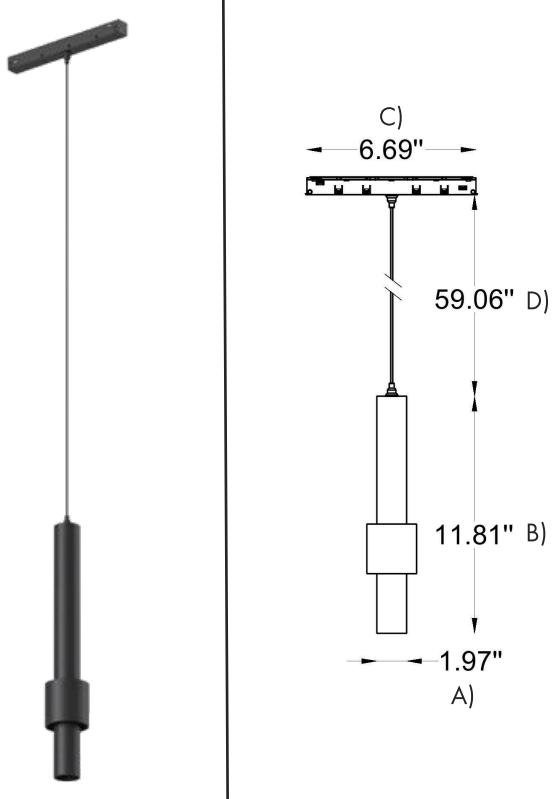WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646

Updated 03/02/2025

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20I-50

Dimensions:

A) Diameter - Ø: 1.97" (5 cm)

B) Height - H: 11.81" (30 cm)

C) Length - L: 6.69" (17 cm)

D) Cable - L: 59.06" (150 cm)

Diffuser:

Spotlight

Light Source:

LED / 5W / 330 lm

CCT:

-K27 2700K**-K30** 3000K**-K40** 4000K

CRI:

>90

Beam Angle:

-B1 24°**-B2** 36°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

**-DL**

Dali

**-LU**

Lutron

**-CA**

Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C


Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

PROJECT

SPEC TYPE

NOTES

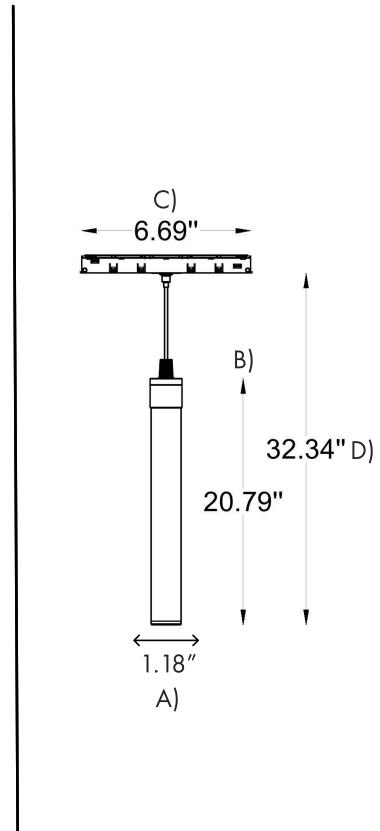WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20IJ-30

Dimensions:

A) Diameter - Ø: 1.18" (3 cm)

B) Height - H: 11.81" (30 cm)

C) Length - L: 6.69" (17 cm)

D) Max. Height - L: 59.06" (150 cm)

Diffuser:

Silicone Neon rigid tube

Light Source:

LED / 7W / 490 lm

CCT:

-K27 2700K



-K30 3000K



-K35 3500K



-K40 4000K



CRI:

>90

Beam Angle:

360°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable



-DL Dali



-LU Lutron



-CA Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C


Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

PROJECT

SPEC TYPE

NOTES

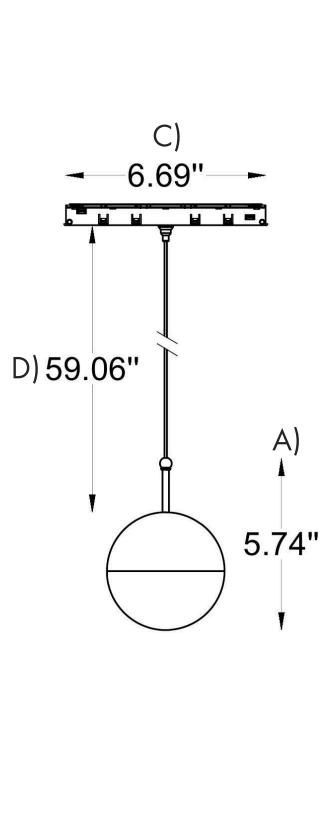
WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20IB-100

Dimensions:

A) Diameter - Ø: 5.74" (3 cm)

B) Length - L: 6.69" (17 cm)

D) Cable - L: 59.06" (150 cm)

Diffuser:

Glass

Light Source:

LED / 5W / 500 lm

CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

360°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL Dali

-LU Lutron

-CA Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

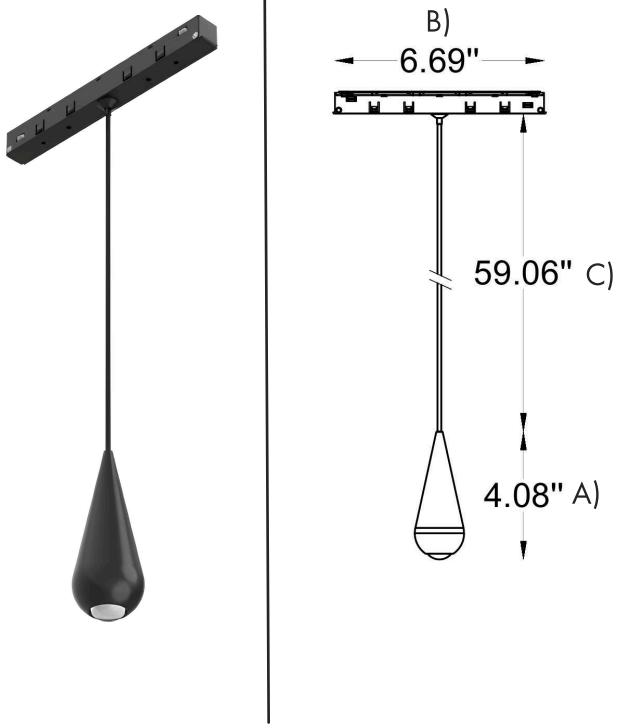WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20IW-40

Dimensions:

A) Height - H: 4.08" (4 cm)

B) Length - L: 6.69" (17 cm)

C) Cable - L: 59.06" (150 cm)

Diffuser:

Lens

Light Source:

LED / 3W / 280 lm

CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI:

>90

Beam Angle:

110°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL Dali

-LU Lutron

-CA Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

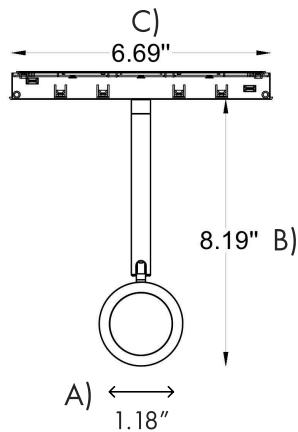

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20SS-55

Dimensions:

A) Diameter - Ø: 2.17" (5.5 cm)

B) Height - H: 6.69" (17 cm)

C) Length - L: 59.06" (150 cm)

Diffuser:

Lens

Light Source:

LED / 3W / 170 lm

CCT:

1500K (Colorfull)

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

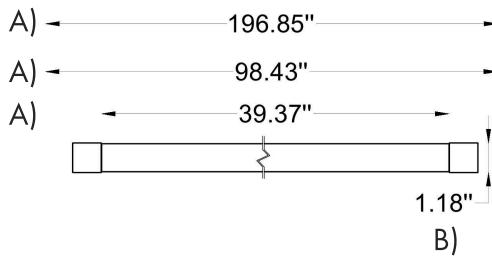WWW.BULLARDCOLLECTION.COM[TECHNICAL](#)[OUTDOOR](#)[DECORATIVE](#)

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-RNR30NK

Dimensions:

A) Length -

-L1 L: 39.37" (100 cm)

-L2 L: 98.43" (250 cm)

-L3 L: 196,85" (500 cm)



B) Diameter -

Ø: 1.81" (3 cm)

Diffuser:

Round Neon

Light Source:

LED / 14W / 960 lm **for L1 model***LED / 35W / 2380 lm **for L2 model***LED / 70W / 4770 lm **for L3 model***

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

360°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable



-DL

Dali



-LU

Lutron



-CA

Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

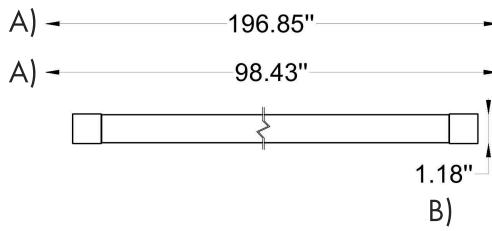

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-RNR30NJ

Dimensions:

A) Length -

-L1

L: 39.37" (100 cm)

-L2

L: 98.43" (250 cm)

B) Diameter -

Ø: 1.81" (3 cm)

Diffuser:

Round Tube

Light Source:

LED / 14W / 940 lm for L1 model*

LED / 35W / 2340 lm for L2 model*

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

360°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM< 5 step

Intallation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

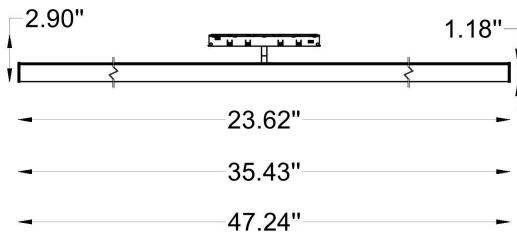

LED **48 VDC** **IP20** **OLUTRON** **CASAMBI**

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-TLSR-NMT-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20NK-27

Dimensions:

A) Length -

-L1 L: 42.52" (108 cm)

-L2 L: 62.2" (158 cm)

-L3 L: 200" (508 cm)



B) Length 2 -

L: 2.9" (7.4 cm)

C) Height -

H: 1.81" (2.4 cm)

Diffuser:

Silicone Neon

Light Source:

-LS1 LED / 10W / 450 lm



-LS2 LED / 14W / 630 lm



-LS3 LED / 48W / 2160 lm



CCT:

-K27 2700K



-K30 3000K



-K40 4000K



CRI: >90

Beam Angle: 110°

Input voltage: 48VDC

Dimming:

-NON Non-Dimmable



-DL Dali



-LU Lutron



-CA Casambi



Coating:

White (neon)

IP rating:

IP20

Color tolerance:

SDCM< 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

ACCESSORIES:


-PN-D
Pendant cable (Track)




-TLS-R892
Pendant cable (Neon)




-PG-I
Pendant rod (Track)




-TLS-R893
Pendant rod (Neon)




-CL-18
Ceiling accessories (Neon)




-CL-21
Ceiling screw (Track)




-TLS-R862(N)
Power feeder of track




-TLS-R865
Female end cap



-TLS-R600
End cap




-TLS-R860
Turned connector



-TLS-R861
Straight connector
(Without Wire locker)



-TLS-R863(N)
I-shaped electrical
connector
180° splicing bar



HOW TO ORDER:

Example:

CODE: PN-D-TLS-R893-CL21-TLS-R861

NOTES

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS

POWER SUPPLY:

-PN-D


100W Power supply

**-BN-V48-150P**

150W Power supply

**-BN-V48-250P**

250 Power supply



HOW TO ORDER:

Example:

CODE: PN-D

NOTES

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646