

ROLL
(track)

BY-RLL-TC

PROJECT

SPEC TYPE

NOTES

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

GENERAL INFORMATION:

The ROLL Non-Magnetic Track system is available in 1-Circuit and 3-Circuit track profiles, with lengths of 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm), operating at 110-277V. The profiles are available in white or black finishes, constructed from aluminum with an electrostatic powder coating.

It includes three spotlight models with the following dimensions:

- Ø: 2.56" (6.5 cm) x H: 6.5" (16.5 cm)
- Ø: 2.6" (7.1 cm) x H: 7.24" (18.4 cm)
- Ø: 3.27" (8.3 cm) x H: 7.4" (18.8 cm)

The spotlights are available in wattages of 20W, 23W, 24W, 27W, and 36W, with aluminum anodized specular silver reflectors or lenses. They come in CCT options of 3000K and 4000K, with CRI ratings of 80 or 90. Finish options for the spotlights include white and black.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black, Gray

LIGHTING:

LED

VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:




sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

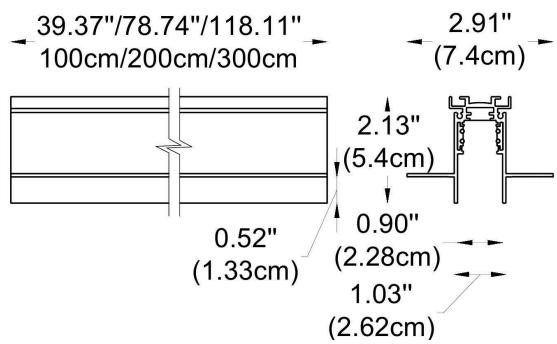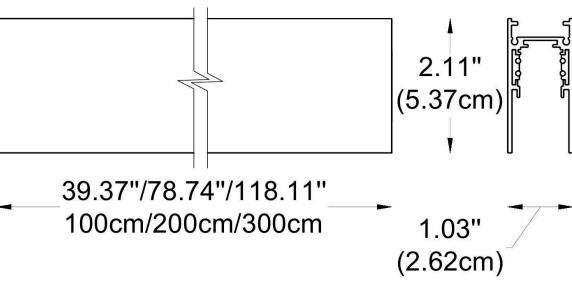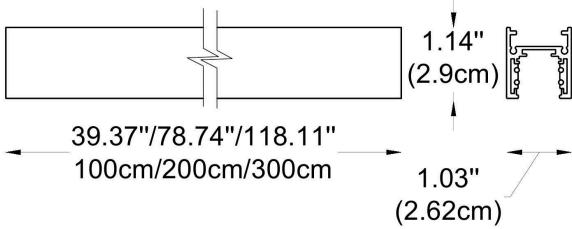WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-RLL-TC-1-01-BL

CODE FOR TRACK HEAD: 65341-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

BY-RLL-TC-1-01-BL

1 CHOOSE TRACK MODEL:

1-Circuit Track Profile



-1-01 L: 39.4" (100 cm)

-1-02 L: 78.7" (200 cm)

-1-03 L: 118" (300 cm)

3-Circuit Track Profile



-2-01 L: 39.4" (100 cm)

-2-02 L: 78.7" (200 cm)

-2-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

-BL	Black
-WH	White



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



REFLECTOR

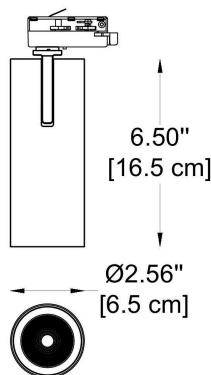WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-RLL-TC-1-01-BL

CODE FOR TRACK HEAD: 65341-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65341-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65341-01

Dimensions:

Ø: 2.56" (6.5 cm) x H: 6.5" (16.5 cm)

Housing:

AL. Die-Casting, Electrostatic Powder Coating

Reflector:

AL. Anodized Specular Silver

Light Source:

LED (COB)

Power & Currents:

20W / 500 mA

CCT:

-K30 - 3000K**-K40** - 4000K

CRI:

-C80 - 80**-C90** - 90

Beam Angle & lumens:

-B1 - 15.8° = 2008 lm**-B2** - 28.1° = 1818 lm**-B3** - 40.0° = 1810 lm


Finish Options:

-WL - White**-BL** - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

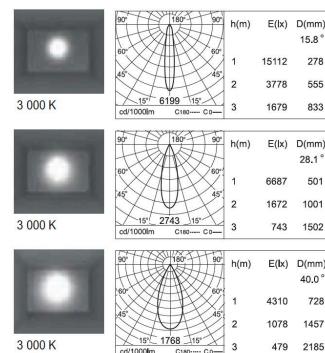

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

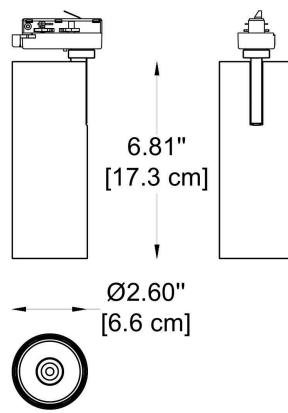WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-RLL-TC-1-01-BL

CODE FOR TRACK HEAD: 65341-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65341-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65342-01

Dimensions:

Ø: 2.6" (6.6 cm) x H: 6.81" (17.3 cm)

Housing:

AL. Die-Casting, Electrostatic Powder Coating

Reflector:

LENS

Light Source:

LED (COB)

Power & Currents:

23W / 600 mA

CCT:

-K30 - 3000K**-K40** - 4000K

CRI:

-C80 - 80**-C90** - 90

Beam Angle & lumens:

-B1 - 26.2° = 2378 lm**-B2** - 34.6° = 2332 lm**-B3** - 48.9° = 2502 lm


Finish Options:

-WL - White**-BL** - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

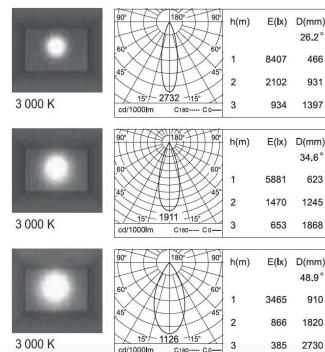

WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.comwww.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

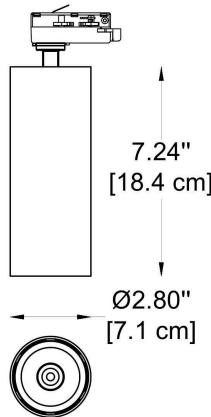WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-RLL-TC-1-01-BL

CODE FOR TRACK HEAD: 65341-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65341-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65370-05

Dimensions:

Ø: 2.6" (7.1 cm) x H: 7.24" (18.4 cm)

Housing:

AL. Die-Casting, Electrostatic Powder Coating

Reflector:

LENS

Light Source:

LED (COB)

Power & Currents:

24W / 600 mA

CCT:

-K30 - 3000K**-K40** - 4000K

CRI:

-C80 - 80**-C90** - 90

Beam Angle & lumens:

-B1 - 23.5° = 2610 lm**-B2** - 31.0° = 2623 lm**-B3** - 47.2° = 2675 lm



Finish Options:

-WL - White**-BL** - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646




WE WELCOME ALL CUSTOM ORDERS

PROJECT

SPEC TYPE

NOTES

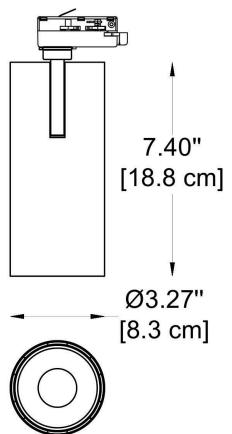WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.comwww.byiba.com

1 877-964-4646

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-RLL-TC-1-01-BL

CODE FOR TRACK HEAD: 65341-01-K30-C90-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65341-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65170-05

Dimensions:

Ø: 3.27" (8.3 cm) x H: 7.4" (18.8 cm)

Housing:

AL. Die-Casting, Electrostatic Powder Coating

Reflector:

LENS

Light Source:

LED (COB)

Power & Currents:

-W1 - 20W / 500 mA**-W2** - 27W / 700 mA**-W3** - 36W / 900 mA

CCT:

-K30 - 3000K**-K40** - 4000K

CRI:

-C80 - 80**-C90** - 90

Beam Angle & lumens:

For 20W model:

-B1 - 20.0° = 2278 lm**-B2** - 30.6° = 2299 lm**-B3** - 50.7° = 2335 lm

For 27W model:

-B1 - 20° = 2993 lm**-B2** - 30.7° = 2086 lm**-B3** - 50.9° = 3119 lm

For 36W model:

-B1 - 20.4° = 3455 lm**-B2** - 28.9° = 3562 lm**-B3** - 46.1° = 3600 lm

Finish Options:

-WL - White**-BL** - Black


Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PROJECT

SPEC TYPE

NOTES

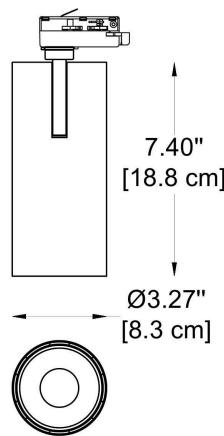

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-RLL-TC-1-01-BL

CODE FOR TRACK HEAD: 65341-01-K30-C90-B1-WL




CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:




65341-01-K30-C90-B1-WL

PHOTOMETRICS:




For 20W model:



For 27W model:



For 36W model:



CONTACT US:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646




WE WELCOME ALL CUSTOM ORDERS

ACCESSORIES FOR 1 CIRCUIT TRACK:


-105
Feed-in Cap
- BL - Black
- WH - White

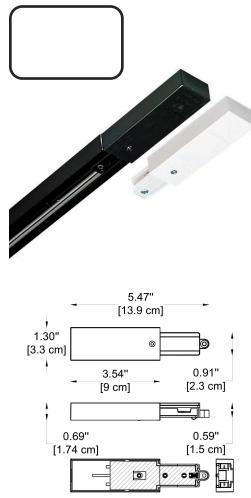


-111
X Connector
- BL - Black
- WH - White

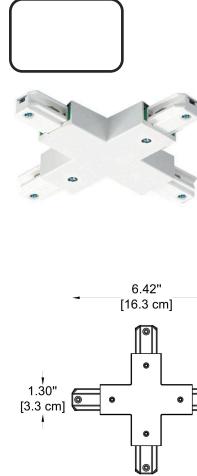


-106
End Cap
- BL - Black
- WH - White

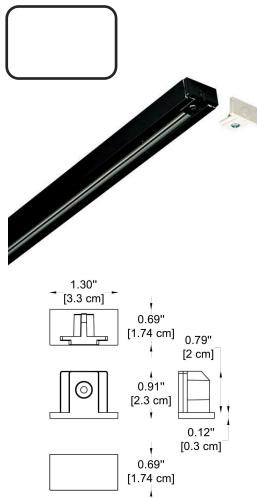


-107
Straight Connector
- BL - Black
- WH - White

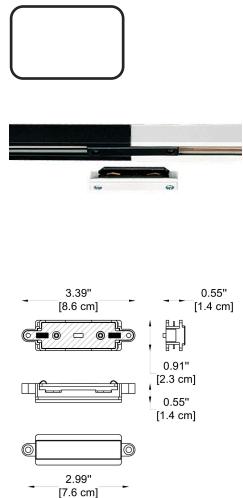

-108
L Connector
- BL - Black
- WH - White

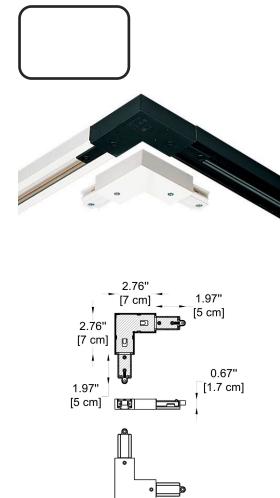

-110
T Connector
- BL - Black
- WH - White

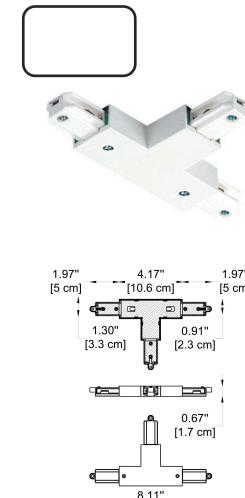

-153
Adapter
- BL - Black
- WH - White



HOW TO ORDER:

Example:
CODE: 105-WH

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE




CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646


WE WELCOME ALL CUSTOM ORDERS

ACCESSORIES FOR 3CIRCUIT TRACK:


-305
Feed-in Cap
-BL - Black
-WH - White




-311
X Connector
-BL - Black
-WH - White





-306
End Cap
-BL - Black
-WH - White




-307
Straight Connector
-BL - Black
-WH - White





-308
L Connector
-BL - Black
-WH - White



-310
T Connector
-BL - Black
-WH - White



-351
Adapter
-BL - Black
-WH - White



HOW TO ORDER:

Example:
CODE: -305-BL

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS