



SMOOTH
(track)

BY-SMO-TC

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The SMOOTH Non-Magnetic Track system comes in both 1-Circuit and 3-Circuit track profiles, with lengths of 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). Operating at 110-277V, the track is made from aluminum with an electrostatic powder coating, available in white or black finishes.

Included are two spotlight models, each measuring Ø 5.35" (13.6 cm) x H 5.3" (13.5 cm), with wattage options of 20W or 28W for the reflector version, and 19W for the lens version. Spotlights feature an anodized specular silver reflector or a lens. CCT options are 3000K, 4000K, or 5000K, with CRI options of 80 or 90, available in white, black, or gray finishes.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black, Gray

LIGHTING:

LED

VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com




www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

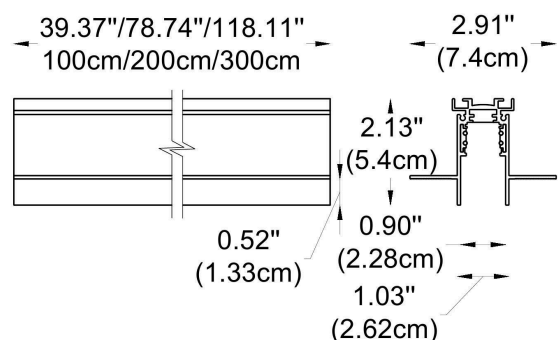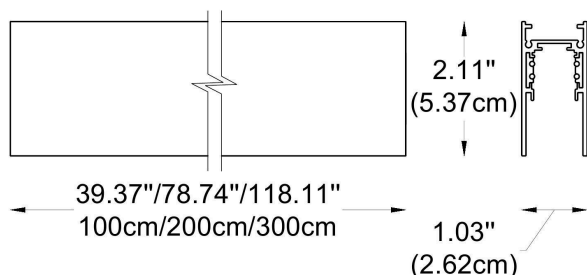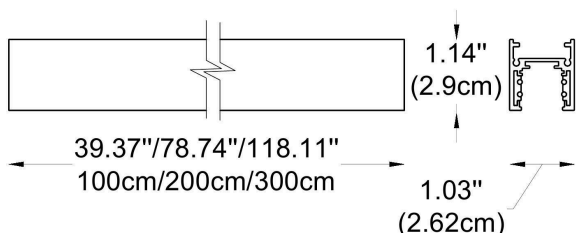

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-SMO-TC-1-01-BL

CODE FOR TRACK HEAD: 65290-01-W0-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

BY-SMO-TC-1-01-BL

1 CHOOSE TRACK MODEL:

1-Circuit Track Profile




-1-01 L: 39.4" (100 cm)

-1-02 L: 78.7" (200 cm)

-1-03 L: 118" (300 cm)

3-Circuit Track Profile

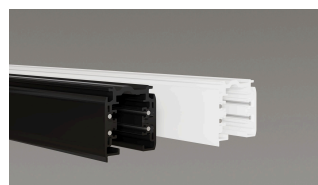

-2-01 L: 39.4" (100 cm)

-2-02 L: 78.7" (200 cm)

-2-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

-BL Black
-WH White

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



REFLECTOR

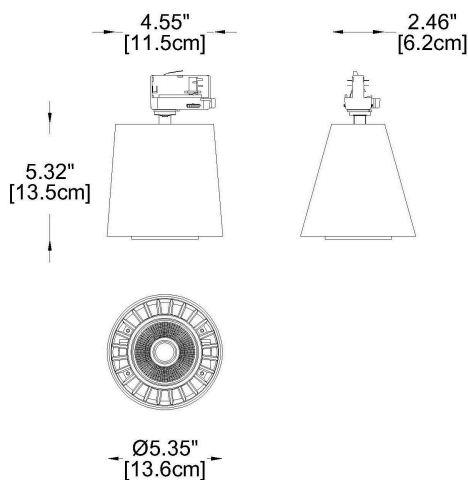

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-SMO-TC-1-01-BL

CODE FOR TRACK HEAD: 65290-01-W0-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65290-01-
W2-K30-
C80-B1-WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65290-01

Dimensions: Ø: 5.35" (13.6 cm) x H: 5.3" (13.5 cm)

Housing: AL. Die-Casting, Electrostatic Powder Coating

Reflector: AL. Anodized Specular Silver

Gear Box: AL. Die-Casting, Electrostatic Powder Coating

Light Source: LED (COB)

Power & Currents: -W2 - 20W / 500 mA

-W3 - 28W / 700 mA

CCT: -K30 - 3000K

-K40 - 4000K

CRI: -C80 - 80

-C90 - 90

Beam Angle & lumens: For 20W model:

-B1 - 17.7° = 2277 lm

-B2 - 25.5° = 2244 lm

-B3 - 38.9° = 2284 lm

For 28W model:

-B1 - 17.8° = 3044 lm

-B2 - 26° = 3000 lm

-B3 - 39.2° = 3056 lm

Finish Options: -WL - White

-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



LENS

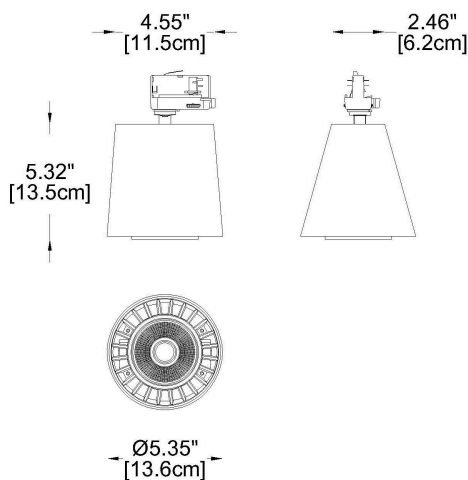

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-SMO-TC-1-01-BL

CODE FOR TRACK HEAD: 65290-01-W0-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65290-01-W2-
K30-C80-B1-
WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65290-02**

Dimensions: Ø: 5.35" (13.6 cm) x H: 5.3" (13.5 cm)

Housing: AL. Die-Casting, Electrostatic Powder Coating

Reflector: Lens

Gear Box: AL. Die-Casting, Electrostatic Powder Coating

Light Source: LED (SMD)

Power : 19W

Output Current: 500 mA

Luminous Flux: 1469 lm

CCT: **-K30 - 3000K**

-K40 - 4000K

-K50 - 5000K

CRI: **-C80 - 80**

-C90 - 90

Finish Options: **-WL - White**


-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

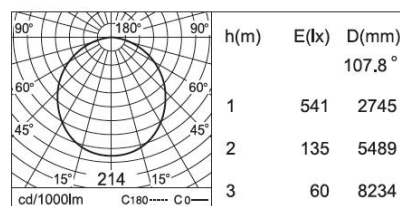

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



REFLECTOR



LENS

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-SMO-TC-1-01-BL

CODE FOR TRACK HEAD: 65290-01-W0-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:

65290-01-W2-
K30-C80-B1-
WL

PHOTOMETRICS:

FOR REFLECTOR TYPE:

20W MODEL



h(m)	E(lx)	D(mm)
1	14893	312
2	3723	624
3	1655	936




h(m)	E(lx)	D(mm)
1	8470	453
2	2118	905
3	941	1358



h(m)	E(lx)	D(mm)
1	4780	705
2	1195	1411
3	531	2116

28W MODEL



h(m)	E(lx)	D(mm)
1	19683	313
2	4921	626
3	2187	940




h(m)	E(lx)	D(mm)
1	10984	461
2	2746	923
3	1220	1384



h(m)	E(lx)	D(mm)
1	6340	713
2	1585	1426
3	704	2139

FOR LENS TYPE:



h(m)	E(lx)	D(mm)
1	541	2745
2	135	5489
3	60	8234



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com

www.byiba.com


1 877-964-4646

ACCESSORIES FOR 1 CIRCUIT TRACK:


-105
Feed-in Cap
-BL - Black
-WH - White

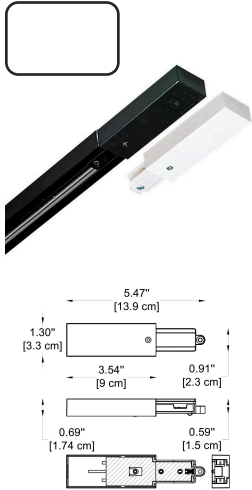


-106
End Cap
-BL - Black
-WH - White

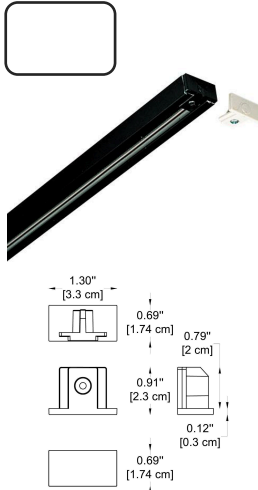


-107
Straight Connector
-BL - Black
-WH - White

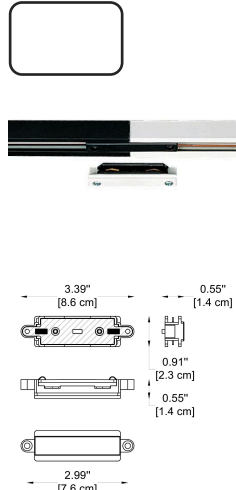


-108
L Connector
-BL - Black
-WH - White

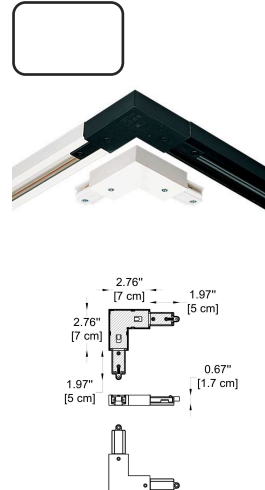

-110
T Connector
-BL - Black
-WH - White

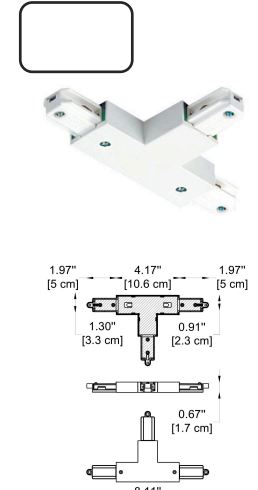

-111
X Connector
-BL - Black
-WH - White

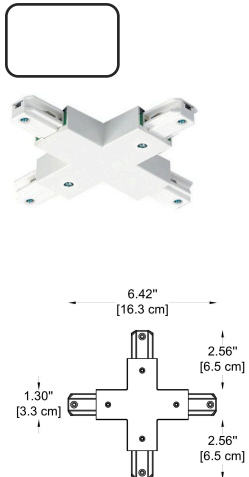

-153
Adapter
-BL - Black
-WH - White



HOW TO ORDER:

Example:
CODE: 105-WH

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE




WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com
www.byiba.com
1 877-964-4646

ACCESSORIES FOR 3CIRCUIT TRACK:


-305
Feed-in Cap
-BL - Black
-WH - White

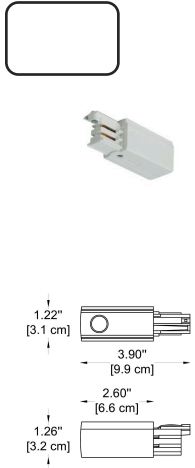


-306
End Cap
-BL - Black
-WH - White

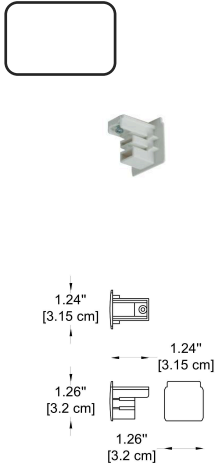


-307
Straight Connector
-BL - Black
-WH - White

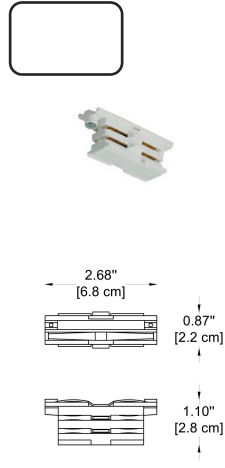


-308
L Connector
-BL - Black
-WH - White

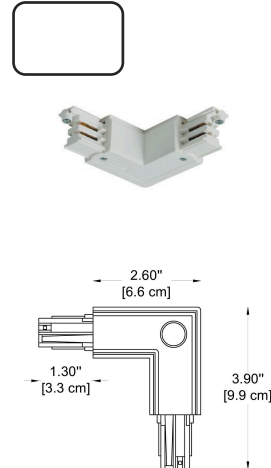


-310
T Connector
-BL - Black
-WH - White

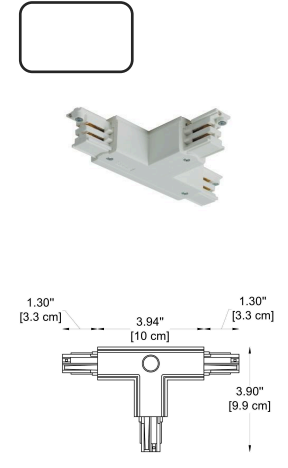

-311
X Connector
-BL - Black
-WH - White

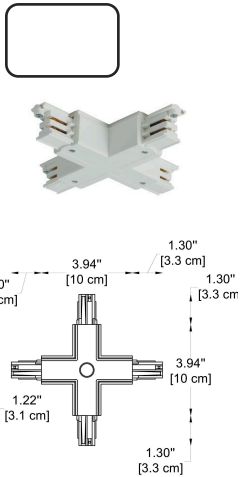

-351
Adapter
-BL - Black
-WH - White

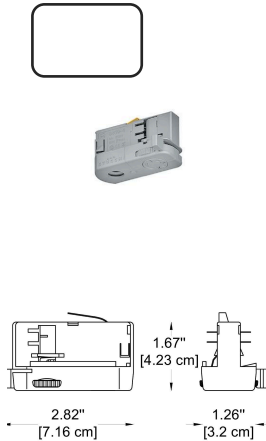

HOW TO ORDER:

Example:
CODE: -305-BL

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646