

UNICO
(track)

BY-UNC-TC

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The UNICO Non-Magnetic Track system features 1-Circuit and 3-Circuit track profiles, available in three lengths: 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). It operates at 110-277V and is crafted from aluminum with an electrostatic powder coating, offered in white or black finishes.

The included spotlight model measures Ø 4.20" (10.6 cm) x H 9.53" (24.2 cm) and comes in 31W or 42W options. The reflector is made of anodized specular silver, or you can choose a lens. CCT options include 3000K or 4000K, with CRI ratings of 80 or 90, available in white, black, or gray finishes.

MATERIAL:

AL, Electrostatic Powder Coating

FINISHING:

White, Black, Gray

LIGHTING:

LED

VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com




www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

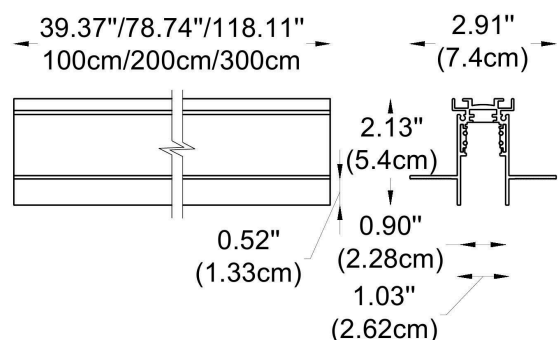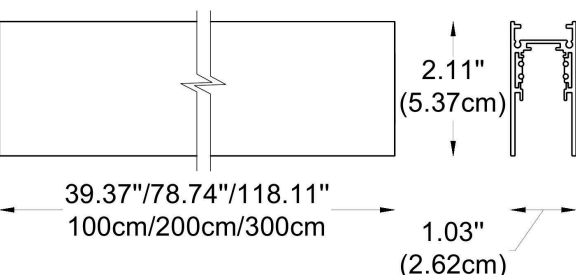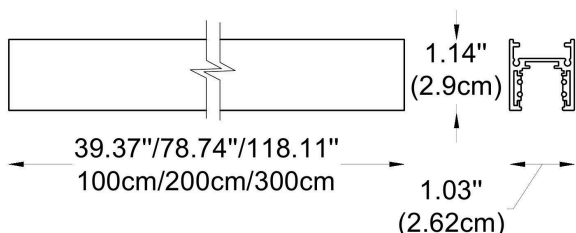

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-UNC-TC-1-01-BL

CODE FOR TRACK HEAD: 65190-W3-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

BY-UNC-TC-1-01-BL

1 CHOOSE TRACK MODEL:

1-Circuit Track Profile




-1-01 L: 39.4" (100 cm)

-1-02 L: 78.7" (200 cm)

-1-03 L: 118" (300 cm)

3-Circuit Track Profile

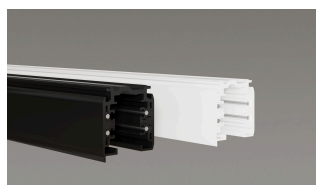

-2-01 L: 39.4" (100 cm)

-2-02 L: 78.7" (200 cm)

-2-03 L: 118" (300 cm)

2 FINISH OPTION TRACK PROFILE:

-BL Black
-WH White

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



REFLECTOR

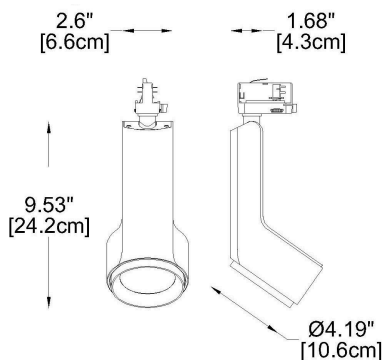

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-UNC-TC-1-01-BL

CODE FOR TRACK HEAD: 65190-W3-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

65190-W3-
K30-C80-B1-
WL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65190**

Dimensions: Ø: 4.20" (10.6 cm) x H: 9.53" (24.2 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: AL. Anodized Specular Silver

Gear Box: AL. Die-Casting, Electrostatic Powder Coating

Light Source: LED (COB)

Power & Currents: **-W2** - 20W / 500 mA

-W3 - 28W / 700 mA

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle & lumens: For 20W model:

-B1 - 17.7° = 2277 lm

-B2 - 25.5° = 2244 lm

-B3 - 38.9° = 2284 lm

For 28W model:

-B1 - 17.8° = 3044 lm

-B2 - 30.6° = 3000 lm

-B3 - 39.2° = 3056 lm

Finish options: **-WL** - White

-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



LENS

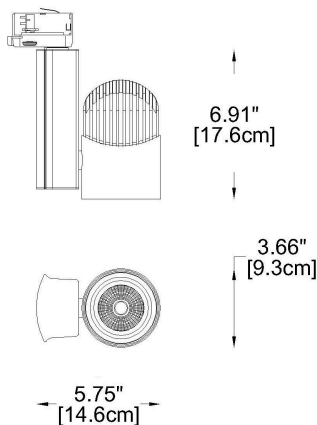

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-UNC-TC-1-01-BL

CODE FOR TRACK HEAD: 65190-W3-K30-C80-B1-WL

CODE FOR ACCESSORIES: 105-WH / 305-BL

65190-W3-K30-C80-B1-WL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65191**

Dimensions: Ø: 4.20" (10.6 cm) x H: 9.53" (24.2 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Gear Box: AL. Die-Casting, Electrostatic Powder Coating

Light Source: LED (COB)

Power & Currents: **-W2** - 20W / 500 mA

-W3 - 27W / 700 mA

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle & lumens: For 20W model:

-B1 - 20° = 2278 lm

-B2 - 30.6° = 2299 lm

-B3 - 50.7° = 2335 lm

For 27W model:

-B1 - 20° = 2993 lm

-B2 - 30.7° = 3086 lm

-B3 - 50.9° = 3119 lm

Finish options: **-WL** - White

-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



REFLECTOR



LENS



HOW TO ORDER:


Example:
CODE FOR TRACK: BY-UNC-TC-1-01-BL
CODE FOR TRACK HEAD: 65190-W3-K30-C80-B1-WL
CODE FOR ACCESSORIES: 105-WH / 305-BL

CODE:


65190-W3-K30-
C80-B1-WL

PHOTOMETRICS:

FOR REFLECTOR TYPE:

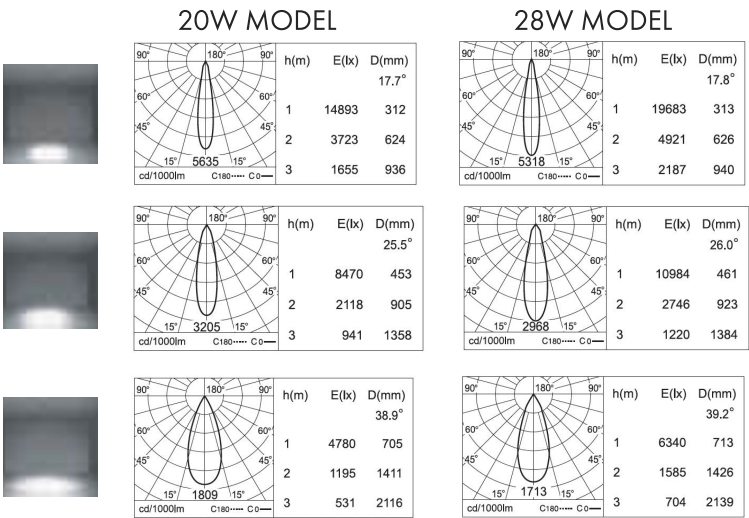

FOR LENS TYPE:

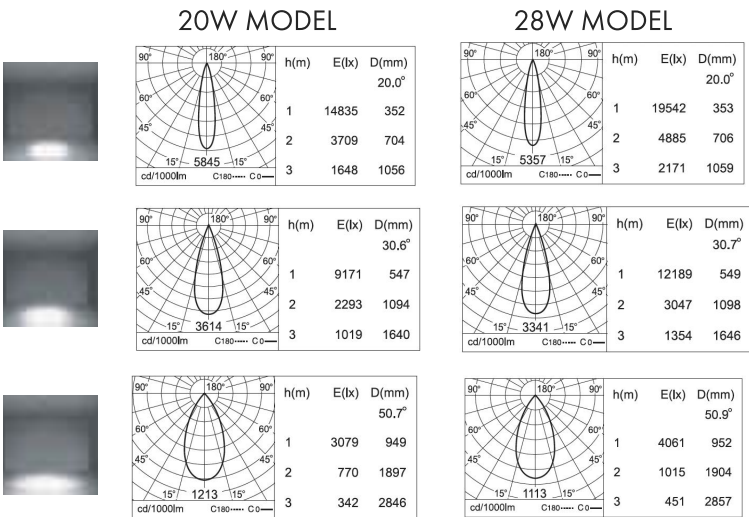

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE




WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com
www.byiba.com
1 877-964-4646

ACCESSORIES FOR 1 CIRCUIT TRACK:


-105
Feed-in Cap
-BL - Black
-WH - White

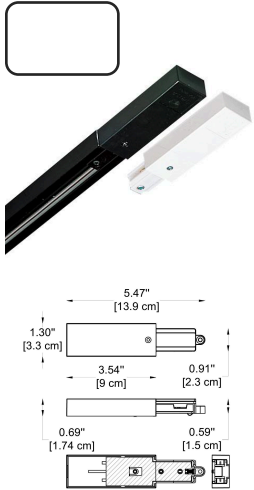


-106
End Cap
-BL - Black
-WH - White

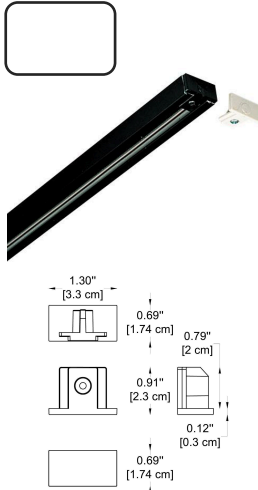


-107
Straight Connector
-BL - Black
-WH - White

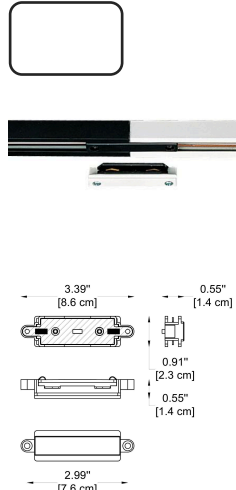


-108
L Connector
-BL - Black
-WH - White

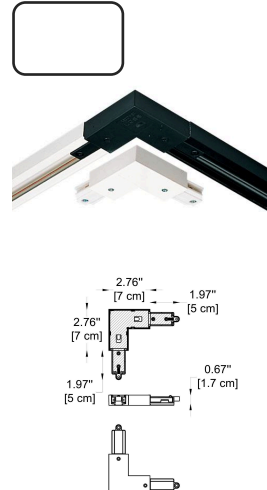

-110
T Connector
-BL - Black
-WH - White

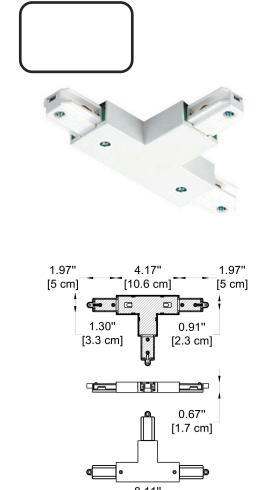

-111
X Connector
-BL - Black
-WH - White

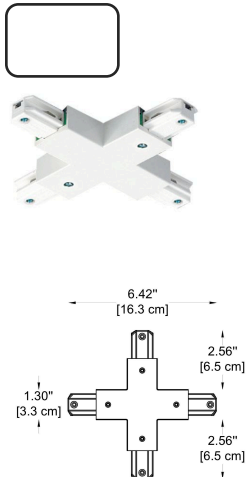

-153
Adapter
-BL - Black
-WH - White



HOW TO ORDER:

Example:
CODE: 105-WH

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE




WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com
www.byiba.com
1 877-964-4646

ACCESSORIES FOR 3CIRCUIT TRACK:


-305
Feed-in Cap
-BL - Black
-WH - White

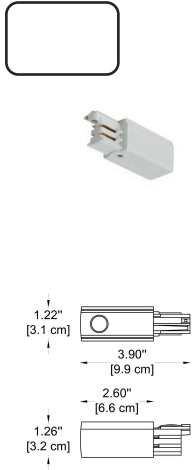


-306
End Cap
-BL - Black
-WH - White

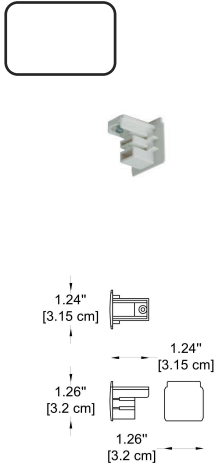


-307
Straight Connector
-BL - Black
-WH - White

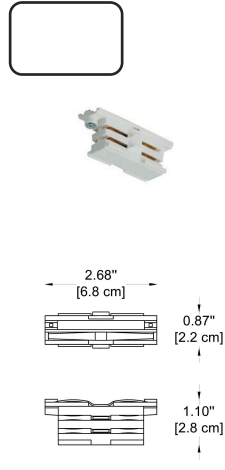


-308
L Connector
-BL - Black
-WH - White

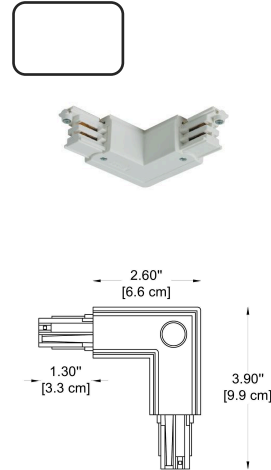


-310
T Connector
-BL - Black
-WH - White

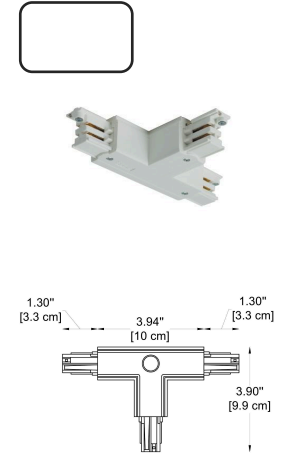

-311
X Connector
-BL - Black
-WH - White

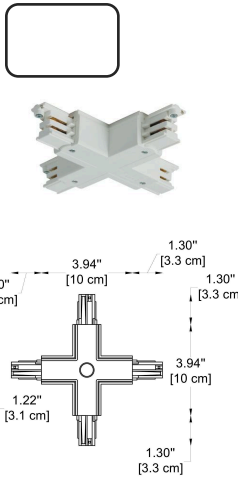

-351
Adapter
-BL - Black
-WH - White

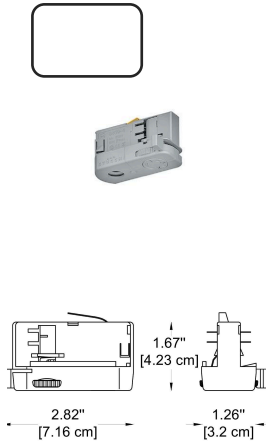

HOW TO ORDER:

Example:
CODE: -305-BL

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646