


MINILED CIMA (CEILING RECESSED)

Transform your spaces with the MINILED CIMA, a recessed LED ceiling light that blends cutting-edge technology with expressive design. Its organic layered pattern creates a dynamic visual effect that plays with light and shadow, making it both a functional luminaire and an artistic architectural element. The distinctive sculptural surface features flowing contours that evoke soft, natural forms — perfect for contemporary interiors where design details matter. Finished in paintable CRISTALY®, it can seamlessly integrate into any ceiling.



		<p>MATERIAL: CRISTALY®</p> <p>LIGHTING: LED</p> <p>VOLTAGE: 110-277V</p> <p>FINISHING: White / Paintable</p> <p>DRIVER POSITION: Remote</p> <p>IP RATING: IP20</p> <p>APPLIANCE CLASS: III</p> <p>DRIVER POSITION: Remote</p> <p>WEIGHT: 24.25 lb</p>
PROJECT		
SPEC TYPE		
NOTES		



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM




Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 03/24/2026

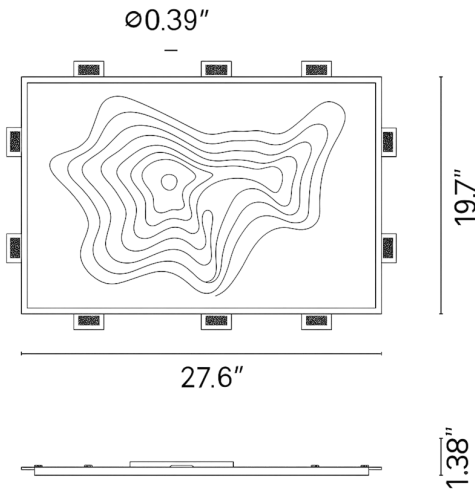

HOW TO ORDER:

Example:
CODE: BY-5516R-9010-L1-B20-K27-DIM

BY-5516R-9010
-L1-B20-K27-
DIM

1 DIMENSIONS:

Height - H: 19.7" (50 cm) Depth - P: 1.38" (3.5 cm)
Length - L: 27.6" (70 cm) Diameter - Ø: 0.39" (1 cm)

2 LIGHT SOURCE:

- L1 LED / 4W / 110-277V / CRI 90
- L2 LED / 6W / 110-277V / CRI 90
- L3 LED / 8.5W / 110-277V / CRI 90
- L4 LED / 11W / 110-277V / CRI 90

3 BEAM ANGLE :

- B20 20°
- Cus Custom on request

4 CCT&LUMENS:

- | | | | |
|---------|-----------------|---|--------------|
| -K27 | 2700K = 450 lm | } | FOR L1 MODEL |
| -K30 | 3000K = 480 lm | | |
| -K40 | 4000K = 510 lm | | |
| -KK27 | 2700K = 630 lm | } | FOR L2 MODEL |
| -KK30 | 3000K = 660 lm | | |
| -KK40 | 4000K = 690 lm | | |
| -KKK27 | 2700K = 820 lm | } | FOR L3 MODEL |
| -KKK30 | 3000K = 850 lm | | |
| -KKK40 | 4000K = 880 lm | | |
| -KKKK27 | 2700K = 1020 lm | } | FOR L4 MODEL |
| -KKKK30 | 3000K = 1050 lm | | |
| -KKKK40 | 4000K = 1080 lm | | |


5 DIMMING OPTIONS:

- DIM 0-10V
- DALI DALI
- LT Lutron
- CS Casambi
- WF WI-FI
- NON Non-Dimmable

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646