


MINILED DOQ (CEILING RECESSED)

The MINILED DOQ is a sleek, minimalist recessed LED lighting module designed to deliver refined accent illumination in contemporary interiors. Its dual-lens configuration provides balanced, glare-controlled light while maintaining a simple architectural presence. Crafted with premium materials and precision machining, this fixture integrates seamlessly into ceilings for subtle yet effective lighting. Perfect for residential and commercial spaces alike, the MINILED DOQ elevates functional light into a thoughtfully designed detail.



		<p>MATERIAL: CRISTALY®</p> <p>LIGHTING: LED</p> <p>VOLTAGE: 110-277V</p> <p>FINISHING: White / Paintable</p> <p>DRIVER POSITION: Remote</p> <p>IP RATING: IP20 / IP44</p> <p>APPLIANCE CLASS: III</p> <p>DRIVER POSITION: Remote</p> <p>WEIGHT: 1.76 lb</p>
<p>PROJECT</p>		
<p>SPEC TYPE</p>		
<p>NOTES</p>		



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.



Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

BY-4249S-9010-
L1-B20-K27-DIM

HOW TO ORDER:

Example:

CODE: BY-4249S-9010-L1-B20-K27-DIM

1 DIMENSIONS:

Height - H: 4.3" (11.5 cm)
 Length - L: 7.68" (19.5 cm)
 Depth - P: 0.78" (2.8 cm)
 Square - h x l: 0.63"(1.6 cm) x 0.63"(1.6 cm)

2 LIGHT SOURCE:


-L1 LED / 2x4W / 110-277V / CRI 90
 -L2 LED / 2x6W / 110-277V / CRI 90
 -L3 LED / 2x8.5W / 110-277V / CRI 90

3 BEAM ANGLE :

-B20 20°
 -B30 30°
 -B40 40°
 -B50 50°

4 CCT&LUMENS:


-K27	2700K = 930 lm	} FOR L1 MODEL
-K30	3000K = 960 lm	
-K40	4000K = 990 lm	
-KK27	2700K = 1290 lm	} FOR L2 MODEL
-KK30	3000K = 1320 lm	
-KK40	4000K = 1350 lm	
-KKK27	2700K = 1670 lm	} FOR L3 MODEL
-KKK30	3000K = 1700 lm	
-KKK40	4000K = 1730 lm	

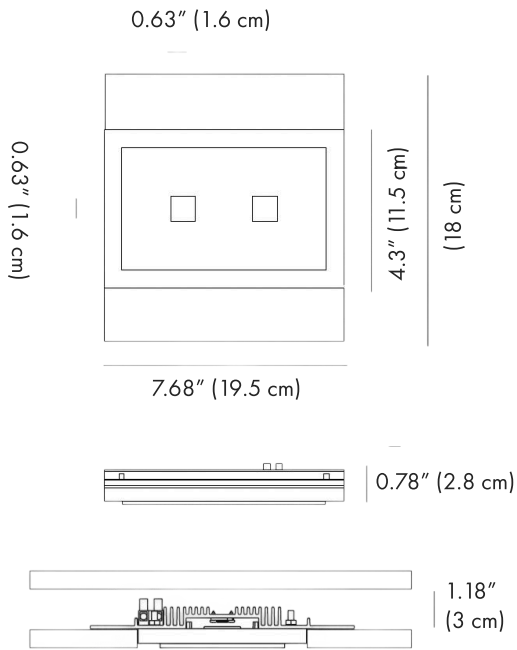

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS


Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

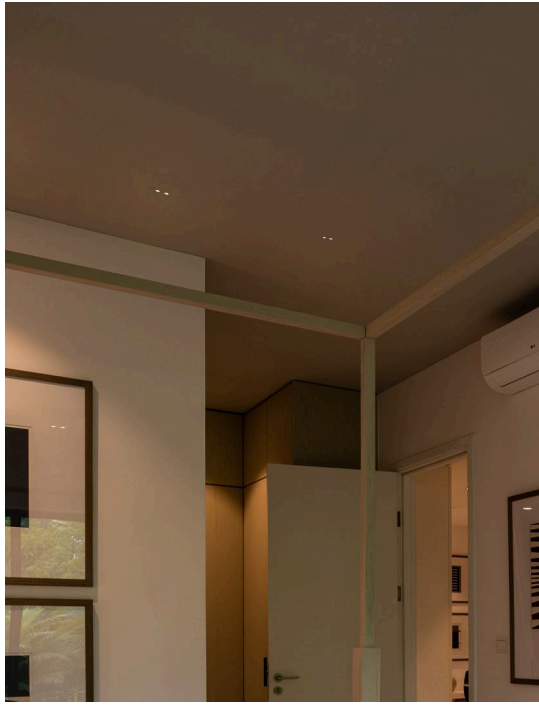

HOW TO ORDER:


Example:
CODE: BY-4249S-9010-L1-B20-K27-DIM

BY-4249S-9010-
L1-B20-K27-DIM

5 DIMMING OPTIONS:

- DIM 0-10V
- DALI DALI
- LT Lutron
- CS Casambi
- WF WI-FI
- NON Non-Dimmable

6 ACCESSORIES:




Housing Box
7.28" × 7.87" × 1.77"
8.46" × 9.06" × 2.17" - Hole

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.