
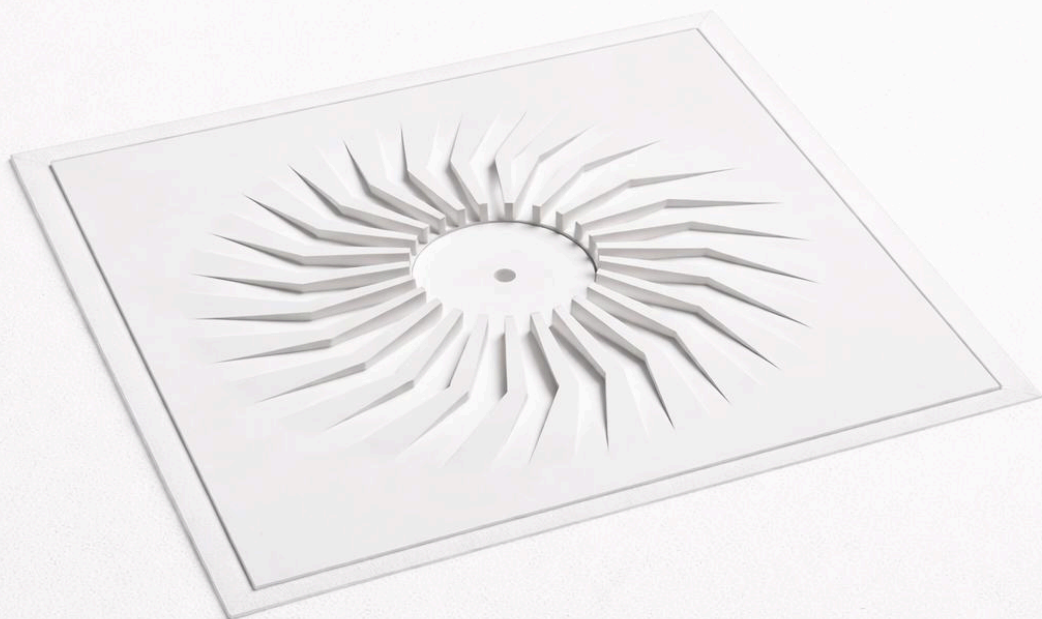


MINILED FABRIC (CEILING RECESSED)

The MINILED FABRIC brings together refined Italian craftsmanship and advanced LED performance to deliver a recessed ceiling light that's as beautiful as it is efficient. Designed for contemporary interiors, this lighting solution transcends ordinary illumination to become an architectural detail that enhances any space. Equipped with high-quality MINILED technology, this fixture provides efficient and comfortable illumination with excellent color rendering, and is available in three color temperatures — warm to neutral.



	
PROJECT	
SPEC TYPE	
NOTES	

MATERIAL:

CRISTALY®

LIGHTING:

LED

VOLTAGE:

110-277V

FINISHING:

White / Paintable

DRIVER POSITION:

Remote

IP RATING:

IP20

APPLIANCE CLASS:

III

DRIVER POSITION:

Remote

WEIGHT:

7.94 lb



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.



Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

BY-5514R-9010
-L1-B20-K27-
DIM

HOW TO ORDER:

Example:

CODE: BY-5514R-9010-L1-B20-K27-DIM

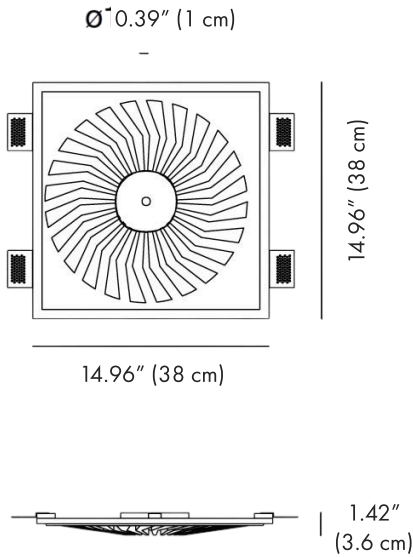

1 DIMENSIONS:

Height - H: 14.96" (38 cm) Depth - P: 1.42" (3.6 cm)
Length - L: 14.96" (38 cm) Diameter - Ø: 0.39" (1 cm)

2 LIGHT SOURCE:

- L1 LED / 4W / 110-277V / CRI 90
- L2 LED / 6W / 110-277V / CRI 90
- L3 LED / 8.5W / 110-277V / CRI 90
- L4 LED / 11W / 110-277V / CRI 90

3 BEAM ANGLE :

- B20 20°
- Cus Custom on request

4 CCT&LUMENS:

- | | | |
|---------|-----------------|----------------|
| -K27 | 2700K = 450 lm | } FOR L1 MODEL |
| -K30 | 3000K = 480 lm | |
| -K40 | 4000K = 510 lm | |
| -KK27 | 2700K = 630 lm | } FOR L2 MODEL |
| -KK30 | 3000K = 660 lm | |
| -KK40 | 4000K = 690 lm | |
| -KKK27 | 2700K = 820 lm | } FOR L3 MODEL |
| -KKK30 | 3000K = 850 lm | |
| -KKK40 | 4000K = 880 lm | |
| -KKKK27 | 2700K = 1020 lm | } FOR L4 MODEL |
| -KKKK30 | 3000K = 1050 lm | |
| -KKKK40 | 4000K = 1080 lm | |


5 DIMMING OPTIONS:

- DIM 0-10V
- DALI DALI
- LT Lutron
- CS Casambi
- WF WI-FI
- NON Non-Dimmable

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646