




MINILED (CEILING RECESSED)

The MINILED is a compact, recessed LED lighting module that combines minimalist design with precision illumination, ideal for modern interiors seeking subtle yet effective lighting solutions. Its clean square form and concealed light source deliver smooth, glare-free light while maintaining a refined architectural presence. Crafted with premium materials and Italian attention to detail, this fixture integrates seamlessly in ceilings with a discreet profile. Perfect for accent, pathway, or task lighting in residential and commercial settings, it elevates functional lighting into a thoughtfully designed element.





MATERIAL:

CRISTALY®

LIGHTING:

LED

VOLTAGE:

110-277V

FINISHING:

White / Paintable

DRIVER POSITION:

Remote

IP RATING:

IP20 / IP44

APPLIANCE CLASS:

III

DRIVER POSITION:

Remote

WEIGHT:

1.1 lb

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.




Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

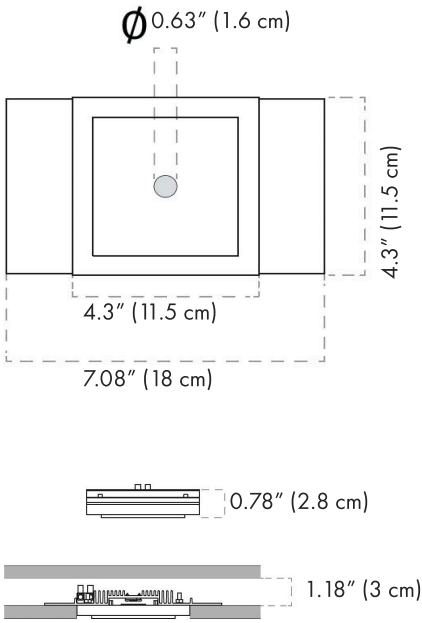

HOW TO ORDER:

Example:

CODE: BY-4247R-9010-L1-B20-K27-DIM

BY-4247R-9010-L1-B20-K27-DIM

1 DIMENSIONS:

Height - H: 4.3'' (11.5 cm)
 Length - L: 4.3'' (11.5 cm)
 Depth - P: 0.78'' (2.8 cm)
 Diameter - \varnothing : 0.63'' (1.6 cm)

2 LIGHT SOURCE:

-L1 LED / 4W / 110-277V / CRI 90
 -L2 LED / 6W / 110-277V / CRI 90
 -L3 LED / 8.5W / 110-277V / CRI 90
 -L4 LED / 11W / 110-277V / CRI 90

3 BEAM ANGLE :

-B20 20°
 -B30 30°
 -B40 40°
 -B50 50°


4 CCT&LUMENS:

-K27	2700K = 450 lm	} FOR L1 MODEL
-K30	3000K = 480 lm	
-K40	4000K = 510 lm	
-KK27	2700K = 630 lm	} FOR L2 MODEL
-KK30	3000K = 660 lm	
-KK40	4000K = 690 lm	
-KKK27	2700K = 820 lm	} FOR L3 MODEL
-KKK30	3000K = 850 lm	
-KKK40	4000K = 880 lm	
-KKKK27	2700K = 1020 lm	} FOR L4 MODEL
-KKKK30	3000K = 1050 lm	
-KKKK40	4000K = 1080 lm	

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646



HOW TO ORDER:

Example:


CODE: BY-4247R-9010-L1-B20-K27-DIM

BY-4247R-9010-
L1-B20-K27-DIM

5 DIMMING OPTIONS:

- DIM 0-10V
- DALI DALI
- LT Lutron
- CS Casambi
- WF WI-FI
- NON Non-Dimmable

6 ACCESSORIES:




Housing Box
7.3" × 4.7" × 1.7"
8.5" × 5.9" × 2.2" - Hole

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.