




Req. space behind the plasterboard:
45mm
(1,77")

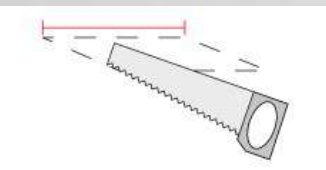


hole on the plasterboard
105x105mm
(4,13"x4,13")

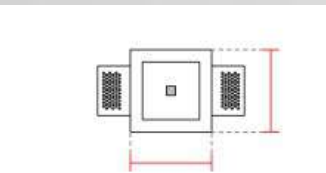


External measures
100x100mm
(3,93")

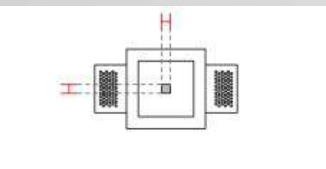

Measures of the light output
11x11mm
(0,43"x0,43")

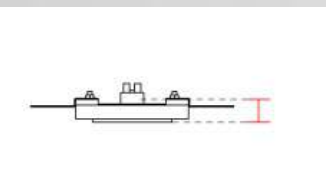

Height without electrical part
25mm
(0,98")

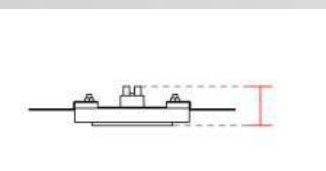

Height including the electrical part:
40mm
(1,57")

4249A

Recessed Spotlight / CRISTALY
Surface finish : CRISTALY

MODEL:

Code	4249A
Product family	CEILING RECESSED LIGHTING
Type	Recessed Spotlight

MATERIAL/SURFACE FINISH:

Code	004
Material	CRISTALY
Surface finish	CRISTALY

CODE ELECTRICAL PART

4249A-3000	LED 2W-24Vdc-200lm-3000°K-CRI90
4249A-2700	LED 2W-24Vdc-190lm-2700°K-CRI90
4249A-4000	LED 2W-24Vdc-210lm-4000°K-CRI90

GENERAL DATA:

Protection Index	IP20-IP44
Isolation Class	III
Weight [Kg]	0.35
Country of production	MADE IN ITALY
Mounting instruction	025.598_9010

INSTALLATION

Multisize system	YES
Position	Ceiling lighting


PACKAGING:

Type	White american Box
Measures AxBxH	139x139x73mm
Gross Weight [Kg]	0.3789
Master carton	NO
Quantity of articles	
Measures AxBxH	

Notes


LED maintenance without masonry work

FOTOMETRIC DATA 4249A-2700:

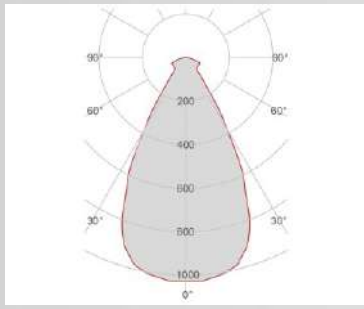


Electrical part	2700_A	Illuminance	1m	63lux
Power	2W		2m	16lux
Light Output	190lm		3m	7lux
Colour Temperature	2700°K		4m	4lux
CRI	90		5m	3lux
Lamp Light Output	32%			
Light Output of the lamp	60.8lm			
Beam Angle	55°			
Beam Inclination				

FOTOMETRIC DATA 4249A-3000:

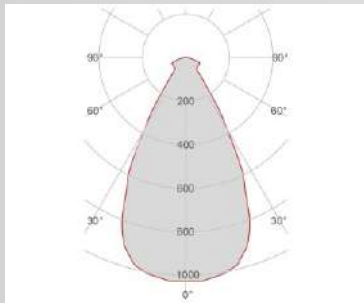

Electrical part	3000_A	Illuminance	1m	66lux
Power	2W		2m	16lux
Light Output	200lm		3m	7lux
Colour Temperature	3000°K		4m	4lux
CRI	90		5m	3lux
Lamp Light Output	32%			
Light Output of the lamp	64lm			
Beam Angle	55°			
Beam Inclination				


FOTOMETRIC DATA 4249A-4000:

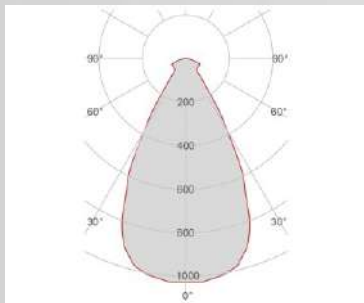


Electrical part	4000_A	Illuminance	1m	69lux
Power	2W		2m	17lux
Light Output	210lm		3m	8lux
Colour Temperature	4000°K		4m	4lux
CRI	90		5m	3lux
Lamp Light Output	32%			
Light Output of the lamp	67.2lm			
Beam Angle	55°			
Beam Inclination				

ACCESSORIES

Housing Box for Brickwork

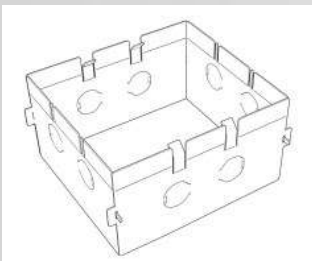


Code 023.450
Measures 105X105X65mm
Measures of the hole 135X135X75mm




Code 099.142
Description Emergency Kit
Notes


Standard Power Supply



Code 026.258
Measures 130x42x23mm
Power 12W
Input 110-277V~W
Output 24Vdc




Code 026.259
Measures 167x45x30mm
Power 36W
Input 110-277V~W
Output 24Vdc

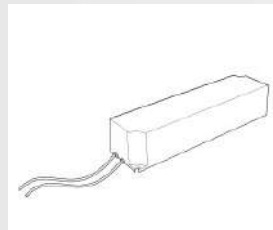


Code 026.260
Measures 157x54x36mm
Power 60W
Input 110-277V~W
Output 24Vdc

Dimmable Power Supply



Code 026.219
Measures 155x51x26mm
Power 21.6W
Input 110-277V~W
Output 24Vdc
Dimmable PUSH/0-10V/DALI

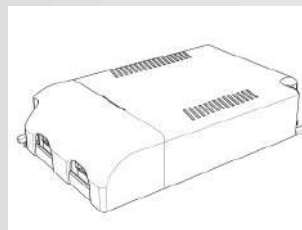

Code 026.209
Measures 125x82x29mm
Power 60W
Input 110-277 V~W
Output 24Vdc
Dimmable PUSH/1-10V