



ABITO  
(pendant)

BY-513-P

PROJECT

SPEC TYPE

NOTES



LED

110-277V

Grounding symbol

IP20

Light beam diagram

1.8 kg

2.6 kg

GENERAL INFORMATION:

Our modern and minimalist pendant lighting fixtures, available in two sizes, are crafted from aluminum with an electrostatic powder coating. The small model measures Ø 12.3" (31.2 cm) x H 2.24" (5.7 cm), and the big model measures Ø 13.8" (35 cm) x H 2.56" (6.5 cm). Finished in black, these LED fixtures support 110-277V, with color temperatures of 3000K, 4000K, and 5700K, and wattages of 80W, 100W, 120W, and 150W, offering CRI options of 80 or 90. ETL certified and designed for indoor use, they are perfect for both residential and commercial spaces.

HOUSING:

AL. Spinning Processing, Electrostatic Powder Coating

FINISHING:

Black

LIGHTING:

LED SMD

INPUT VOLTAGE:

110-277V

IP RATING:

20

OPERATING TEMPERATURE RANGE:

-20 to +40 C

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS



CONTACT US:

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)  
[www.byiba.com](http://www.byiba.com)  
 1 877-964-4646

PROJECT

SPEC TYPE

NOTES

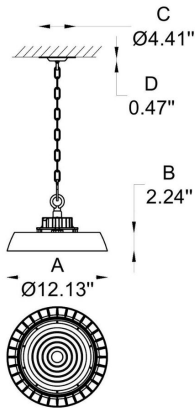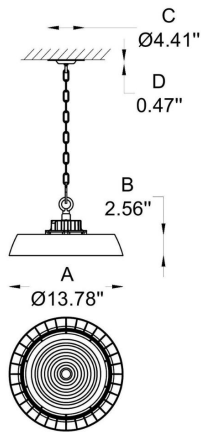

1.8 kg 2.6 kg

### HOW TO ORDER:

Example:

CODE: BY-513-P-60-W15-B1-K30-80-RE-A-ACC1

CODE:

BY-513-P-60-  
W15-B1-  
K30-80-RE-A-  
ACC1

### 1 MODEL:

- 60 A) Diameter- Ø: 13.8" (35 cm)  
B) Height - H: 2.56" (6.5 cm)  
C/D) Canopy Ø: 4.4" (11 cm) x H: 0.5" (1.3 cm)
- 50 A) Diameter- Ø: 12.3" (31.2 cm)  
B) Height H: 2.24" (5.7 cm)  
C) Canopy Ø: 4.4" (11 cm) x H: 0.5" (1.3 cm)

### 2 LIGHT SOURCE:

- W15 LED - 150W - 650 mA for 60 model
- W12 LED - 120W - 520 mA
- W10 LED - 100W - 435 mA for 50 model
- W8 LED - 80W - 350 mA

### 3 BEAM ANGLE - LUMINOUS FLUX:

- B1 114.9° 17 808 lm for 150W
- B1.1 93.6° 17 849 lm
- B2 114.9° 14 833 lm for 120W
- B2.2 93.7° 15 025 lm
- B3 114.5° 11 643 lm for 100W
- B3.3 93.4° 11 817 lm
- B4 114.3° 9 961 lm for 80W
- B4.4 92.0° 9 937 lm

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)


[www.byiba.com](http://www.byiba.com)

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

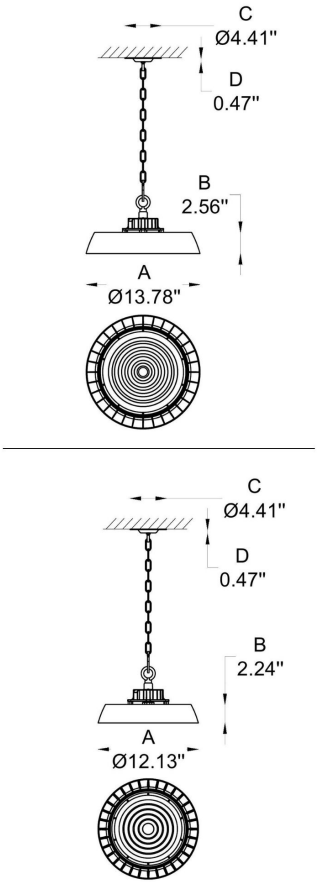

W

1.8 kg

W

2.6 kg

HOW TO ORDER:

CODE:

Example:  
CODE: BY-513-P-60-W15-B1-K30-80-RE-A-ACC1

BY-513-P-60-  
W15-B1-  
K30-80-RE-A-  
ACC1

4 CCT SPECIFY:

- K30 3000K
- K40 4000K
- K57 5700K

5 CRI:


- 80 CRI 80
- 90 CRI 90

6 DRIVER POSITION:

- RE Remove

7 FLANGE OPTIONS:

- A B



8 ACCESSORIES:

- ACC1 -ACC2



- Clear Lens Sanding Lens

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com  
www.byiba.com  
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

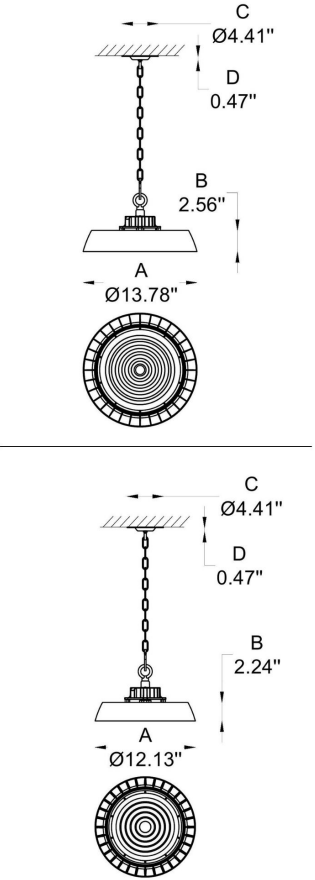

W 1.8 kg W 2.6 kg

HOW TO ORDER:


Example:  
CODE: BY-513-P-60-W15-B1-K30-80-RE-A-ACC1

CODE:


BY-513-P-60-  
W15-B1-  
K30-80-RE-A-  
ACC1

9 PHOTOMETRICS

80W




Clear Lens




Sanding Lens

100W




Clear Lens




Sanding Lens

120W




Clear Lens




Sanding Lens

150W



Clear Lens



Sanding Lens

[WWW.BULLARDCOLLECTION.COM](http://WWW.BULLARDCOLLECTION.COM)



CONTACT US:

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)  
[www.byiba.com](http://www.byiba.com)  
1 877-964-4646

WE WELCOME ALL CUSTOM ORDERS