



BYIBA CURVY (magnetic track system)

BY-BCRV-TC

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

BYIBA CURVY MAGNETIC TRACK SYSTEM is a minimalistic track lighting solution that connects and powers it's LED heads via a magnetic core. The design of the 24-volt system not only ensures a reliable and safe connection between each fixture to the track, it allows for ease in the relocation of each-at any time. BYIBA CURVY magnetic track is available in custom RAL colors, wood painted finishes, gold and bronze finishes as well as the original black and white options.

MATERIAL:

Aluminum

FINISHING:

Black/White/Bronze/Gold

LIGHTING:

LED

INPUT VOLTAGE:

24VDC

IP RATING:

20

MAXIMUM POWER:

200W

CONNECTION:

Terminal

INSTALLATION TYPE:

Surface / Pendant / Recessed

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

BY-BCRV-TC-CUS-S-BL-BL

1 TRACK MODELS:

-C1

DIMENSIONS:

A) Length - L: 35.43" (90 cm)
B) Depth - P: 17.72" (45 cm)
C) Profile width - W: 1.54" (3.90 cm)

-C2

DIMENSIONS:

A) Length - L: 35.43" (90 cm)
B) Profile width - W: 1.54" (3.90 cm)

-C3

DIMENSIONS:

A) Length - L: 16.93" (43 cm)
B) Profile width - W: 1.54" (3.90 cm)

-CUS

Custom on request

2 INSTALLATION TYPE:


-S Suspended
-R Recessed
-SM Surface-Mounted

3 TRACK FINISH OPTIONS:


-BL Black
-BR Bronze
-WH White
-GL Gold

4 CANOPY FINISH OPTIONS: (for suspension version)


-BL Black
-BR Bronze
-WH White
-GL Gold

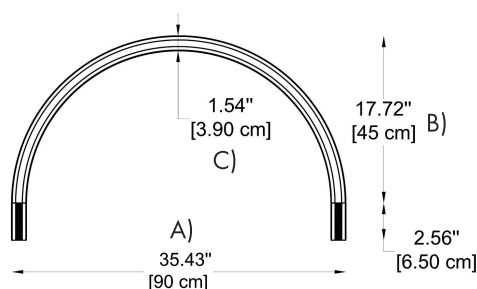

-C1

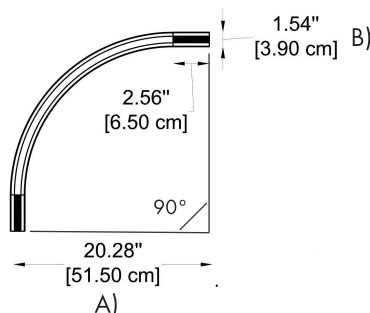

-C2

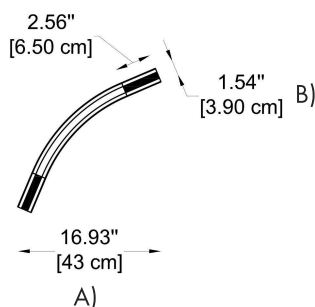

-C3



WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com




www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

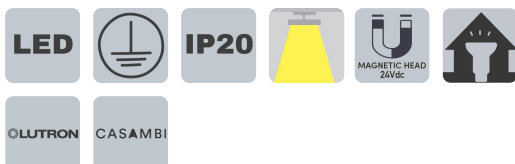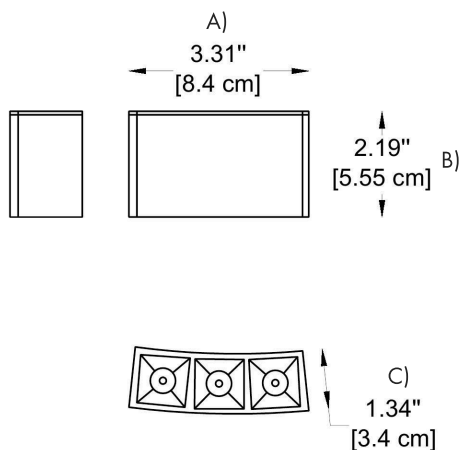

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-DOT3-D9

Dimensions:

A) Length - 3.30" (8,4 cm)

B) Height - 2.18" (5,5 cm)

C) Width - 1.33" (3,4 cm)

Material:

Aluminum

Light Source:

LED / 4W / 280 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Weight (lb)

0,33

Beam Angle:

-B12 - 12°

-B34 - 34°

-B48 - 48°

CCT:

-K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS - Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LU - LUTRON

-CS - CASAMBI

Operating temperature range - -20 to +40°C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

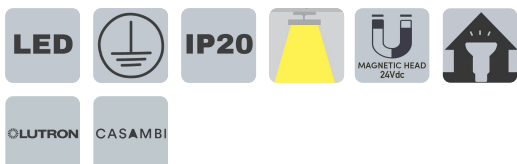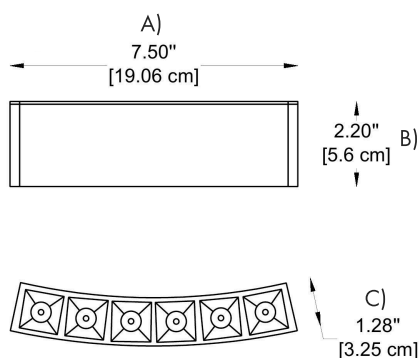

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-DOT-06-D9**
 Dimensions: A) Length - 7.5" (19 cm)
 B) Height - 2.20" (5.6 cm)
 C) Width - 1.28" (3.25 cm)

Material: Aliminum
 Light Source: LED / 8W / 511 lm / 24Vdc
 Lighting type: Direct
 Lighting distribution: Symmetric
 Optical type: Spot
 Dimmable: Yes
 Driver: Remote
 Driver type: Electronic
 Emergency: Without
 Insulation class: III
 Weight (lb) 0,33

Beam Angle: **-B12** - 12° ☐
-B34 - 34° ☐
-B48 - 48° ☐

CCT: **-K30** - 3000K ☐
-K40 - 4000K ☐
-K50 - 5000K ☐

CRI: **-C80** - 80 ☐
-C90 - 90 ☐

Finish Options: **-WL** - White (RAL9003) ☐
-BL - Black (RAL9005) ☐
-CUS - Custom on request* ☐

Dimminng Options: **-DIM** - 0-10V ☐
-DL - DALI ☐
-TR - TRIAC ☐
-LU - LUTRON ☐
-CS - CASAMBI ☐

Operating temperature range - -20 to +40°C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

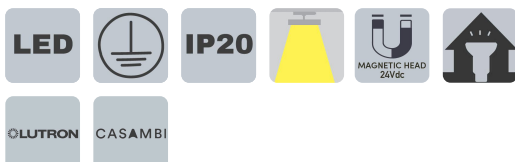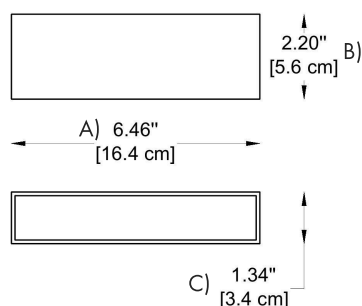

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-DOT-16-D9**
Dimensions: A) Length - 6.5" (16.4 cm)
 B) Height - 2.2" (5.6 cm)
 C) Width - 1.34" (3.4 cm)

Material: Aliminum
Light Source: LED / 7W / 262 lm / 24Vdc
Lighting type: Direct
Lighting distribution: Symmetric
Optical type: Diffuse
Dimmable: Yes
Driver: Remote
Driver type: Electronic
Emergency: Without
Insulation class: III
Weight (lb) 0,60

Beam Angle: **-B12** - 12° ☐
-B34 - 34° ☐
-B48 - 48° ☐

CCT: **-K30** - 3000K ☐
-K40 - 4000K ☐
-K50 - 5000K ☐

CRI: **-C80** - 80 ☐
-C90 - 90 ☐

Finish Options: **-WL** - White (RAL9003) ☐
-BL - Black (RAL9005) ☐
-CUS - Custom on request* ☐

Dimminng Options: **-DIM** - 0-10V ☐
-DL - DALI ☐
-TR - TRIAC ☐
-LU - LUTRON ☐
-CS - CASAMBI ☐

Operating temperature range - -20 to +40°C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

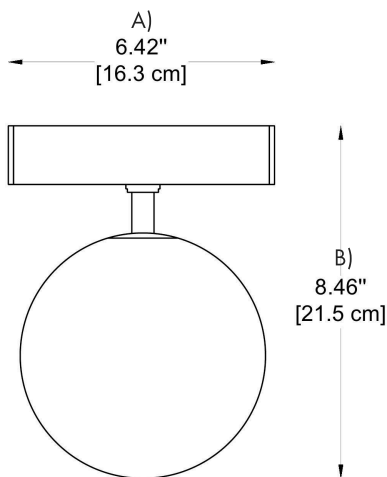

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-GL-D9**
 Dimensions: A) Length - 6.42" (16.3 cm)
 B) Height - 2.2" (21.5 cm)

Material: Aliminum
 Light Source: LED / 5W / 278 lm / 24Vdc
 Lighting type: Direct
 Lighting distribution: Symmetric
 Optical type: Diffuse
 Dimmable: Yes
 Driver: Remote
 Driver type: Electronic
 Emergency: Without
 Insulation class: III
 Weight (lb) 1,37

CCT: **-K30** - 3000K ☐
-K40 - 4000K ☐
-K50 - 5000K ☐

CRI: **-C80** - 80 ☐
-C90 - 90 ☐

Finish Options: **-WL** - White (RAL9003) ☐
-BL - Black (RAL9005) ☐
-CUS - Custom on request* ☐

Dimming Options: **-DIM** - 0-10V ☐
-DL - DALI ☐
-TR - TRIAC ☐
-LU - LUTRON ☐
-CS - CASAMBI ☐

Operating temperature range - -20 to +40°C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

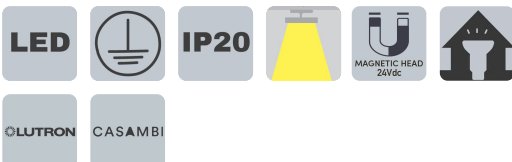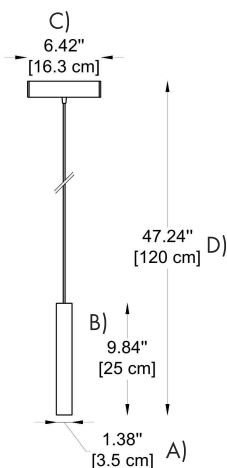

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-35-R-D9
Dimensions:	A) Diameter - 1.38" (3.5 cm)
	B) Height - 9.84" (25 cm)
	C) Canopy - 1.34" (16.3 cm)
	D) Max. Height - 47.24" (120 cm)

Material:	Aluminum
Light Source:	LED / 5W / 378 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Spot
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III
Weight (lb)	1,37

Beam Angle:	-B18 - 18°	<input type="checkbox"/>
	-B24 - 24°	<input type="checkbox"/>
	-B36 - 38°	<input type="checkbox"/>

CCT:	-K27 - 2700K	<input type="checkbox"/>
	-K30 - 3000K	<input type="checkbox"/>
	-K40 - 4000K	<input type="checkbox"/>
	-K50 - 5000K	<input type="checkbox"/>

CRI:	-C80 - 80	<input type="checkbox"/>
	-C90 - 90	<input type="checkbox"/>

Finish Options:	-WL - White (RAL9003)	<input type="checkbox"/>
	-BL - Black (RAL9005)	<input type="checkbox"/>
	-CUS - Custom on request*	<input type="checkbox"/>

Dimming Options:	-DIM - 0-10V	<input type="checkbox"/>
	-DL - DALI	<input type="checkbox"/>
	-TR - TRIAC	<input type="checkbox"/>
	-LU - LUTRON	<input type="checkbox"/>
	-CS - CASAMBI	<input type="checkbox"/>

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

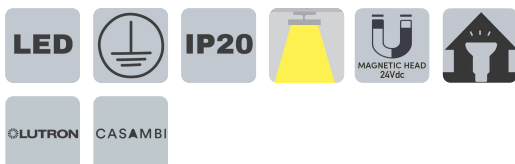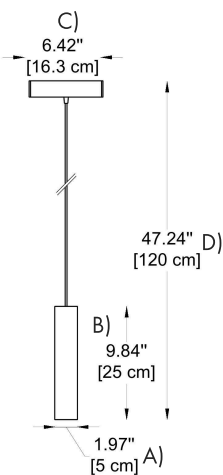

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-35-R-D9
Dimensions:	A) Diameter - 1.97" (5 cm)
	B) Height - 9.84" (25 cm)
	C) Canopy - 6.42" (16.3 cm)
	D) Max. Height - 47.24" (120 cm)

Material:	Aluminum
Light Source:	LED / 10W / 692 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Spot
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III
Weight (lb)	1,37

Beam Angle:	-B18 - 18°	<input type="checkbox"/>
	-B24 - 24°	<input type="checkbox"/>
	-B36 - 36°	<input type="checkbox"/>

CCT:	-K27 - 2700K	<input type="checkbox"/>
	-K30 - 3000K	<input type="checkbox"/>
	-K40 - 4000K	<input type="checkbox"/>
	-K50 - 5000K	<input type="checkbox"/>

CRI:	-C80 - 80	<input type="checkbox"/>
	-C90 - 90	<input type="checkbox"/>

Finish Options:	-WL - White (RAL9003)	<input type="checkbox"/>
	-BL - Black (RAL9005)	<input type="checkbox"/>
	-CUS - Custom on request*	<input type="checkbox"/>

Dimming Options:	-DIM - 0-10V	<input type="checkbox"/>
	-DL - DALI	<input type="checkbox"/>
	-TR - TRIAC	<input type="checkbox"/>
	-LU - LUTRON	<input type="checkbox"/>
	-CS - CASAMBI	<input type="checkbox"/>

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-35-T-D9
Dimensions:	A) Length - 8.78" (22.3 cm)
	B) Height - 3.94" (10 cm)
	C) Diameter - 1.38" (3.5 cm)

Material:	Aluminum
Light Source:	LED / 2x5W / 700 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Spot
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III
Weight (lb)	1,21



Beam Angle:	-B20 - 20°	<input type="checkbox"/>
	-B30 - 30°	<input type="checkbox"/>
	-B40 - 40°	<input type="checkbox"/>
	-B60 - 60°	<input type="checkbox"/>

CCT:	-K27 - 2700K	<input type="checkbox"/>
	-K30 - 3000K	<input type="checkbox"/>
	-K40 - 4000K	<input type="checkbox"/>
	-K50 - 5000K	<input type="checkbox"/>

CRI:	-C80 - 80	<input type="checkbox"/>
	-C90 - 90	<input type="checkbox"/>

Finish Options:	-WL - White (RAL9003)	<input type="checkbox"/>
	-BL - Black (RAL9005)	<input type="checkbox"/>
	-CUS - Custom on request*	<input type="checkbox"/>

Dimming Options:	-DIM - 0-10V	<input type="checkbox"/>
	-DL - DALI	<input type="checkbox"/>
	-TR - TRIAC	<input type="checkbox"/>
	-LU - LUTRON	<input type="checkbox"/>
	-CS - CASAMBI	<input type="checkbox"/>

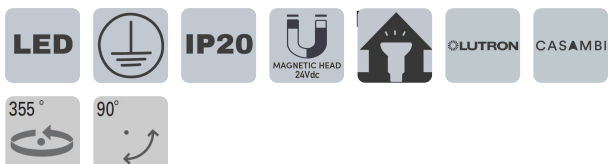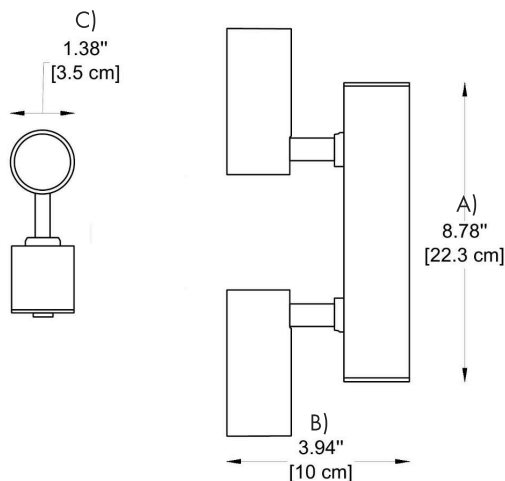

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

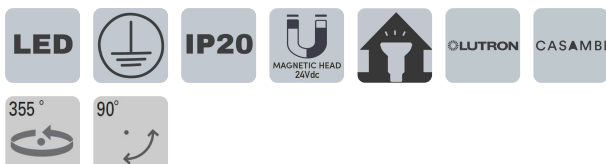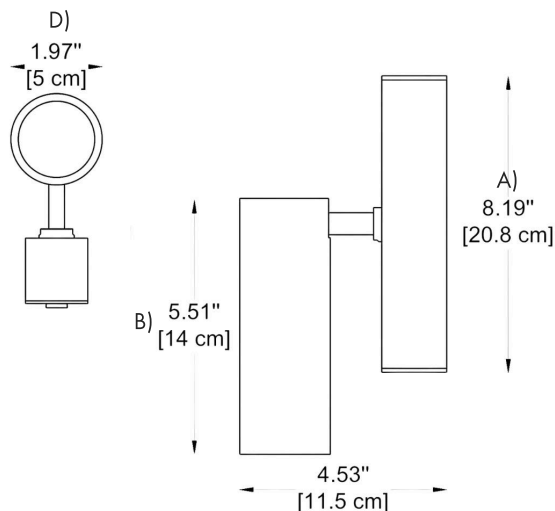

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-50-D9
Dimensions:	A) Canopy Length - 8.19" (20.8 cm)
	B) Head Length - 5.51" (14 cm)
	C) Height - 4.53" (11.5 cm)
	D) Diameter - 1.97" (5 cm)

Material:	Aluminum
Light Source:	LED / 10W / 700 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Spot
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III
Weight (lb)	1,21

Beam Angle:	-B18 - 18°	<input type="checkbox"/>
	-B24 - 24°	<input type="checkbox"/>
	-B36 - 36°	<input type="checkbox"/>

CCT:	-K27 - 2700K	<input type="checkbox"/>
	-K30 - 3000K	<input type="checkbox"/>
	-K40 - 4000K	<input type="checkbox"/>
	-K50 - 5000K	<input type="checkbox"/>

CRI:	-C80 - 80	<input type="checkbox"/>
	-C90 - 90	<input type="checkbox"/>

Finish Options:	-WL - White (RAL9003)	<input type="checkbox"/>
	-BL - Black (RAL9005)	<input type="checkbox"/>
	-CUS - Custom on request*	<input type="checkbox"/>

Dimming Options:	-DIM - 0-10V	<input type="checkbox"/>
	-DL - DALI	<input type="checkbox"/>
	-TR - TRIAC	<input type="checkbox"/>
	-LU - LUTRON	<input type="checkbox"/>
	-CS - CASAMBI	<input type="checkbox"/>

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

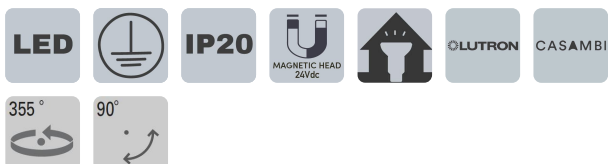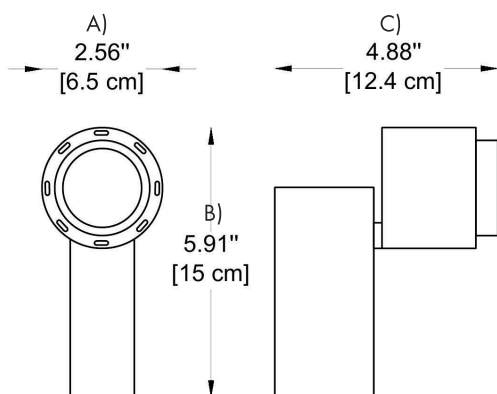

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65-R-D9
Dimensions: A) Diameter - 2.56" (6.5 cm)
 B) Length - 5.91" (15 cm)
 C) Height - 4.88" (12.4 cm)

Material: Aliminum
Light Source: LED / 8W / 276 lm / 24Vdc
Lighting type: Direct
Lighting distribution: Symmetric
Optical type: Spot
Dimmable: Yes
Driver: Remote
Driver type: Electronic
Emergency: Without
Insulation class: III
Weight (lb) 1, 1

Beam Angle: -B20 - 20° ☐
 -B30 - 30° ☐
 -B40 - 40° ☐

CCT: -K27 - 2700K ☐
 -K30 - 3000K ☐
 -K40 - 4000K ☐
 -K50 - 5000K ☐

CRI: -C80 - 80 ☐
 -C90 - 90 ☐

Finish Options: -WL - White (RAL9003) ☐
 -BL - Black (RAL9005) ☐
 -CUS - Custom on request* ☐

Dimming Options: -DIM - 0-10V ☐
 -DL - DALI ☐
 -TR - TRIAC ☐
 -LU - LUTRON ☐
 -CS - CASAMBI ☐

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

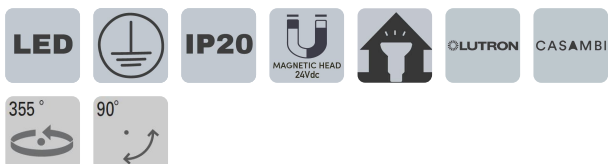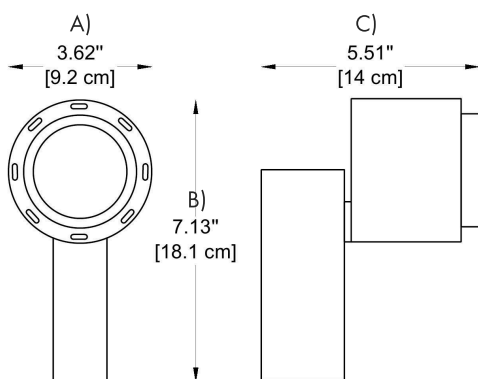

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65-R-D9
Dimensions:	A) Diameter - 3.62" (9.2 cm)
	B) Length - 7.13" (18.1 cm)
	C) Height - 5.51" (14 cm)

Material:	Aluminum
Light Source:	LED / 15W / 625 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Spot
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III
Weight (lb)	1,52

Beam Angle:	-B20 - 20°	<input type="checkbox"/>
	-B30 - 30°	<input type="checkbox"/>
	-B40 - 40°	<input type="checkbox"/>

CCT:	-K27 - 2700K	<input type="checkbox"/>
	-K30 - 3000K	<input type="checkbox"/>
	-K40 - 4000K	<input type="checkbox"/>
	-K50 - 5000K	<input type="checkbox"/>

CRI:	-C80 - 80	<input type="checkbox"/>
	-C90 - 90	<input type="checkbox"/>

Finish Options:	-WL - White (RAL9003)	<input type="checkbox"/>
	-BL - Black (RAL9005)	<input type="checkbox"/>
	-CUS - Custom on request*	<input type="checkbox"/>

Dimming Options:	-DIM - 0-10V	<input type="checkbox"/>
	-DL - DALI	<input type="checkbox"/>
	-TR - TRIAC	<input type="checkbox"/>
	-LU - LUTRON	<input type="checkbox"/>
	-CS - CASAMBI	<input type="checkbox"/>

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

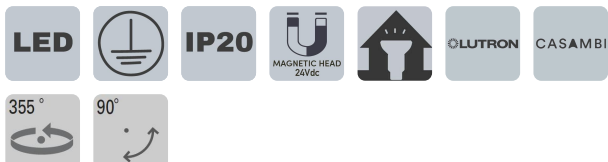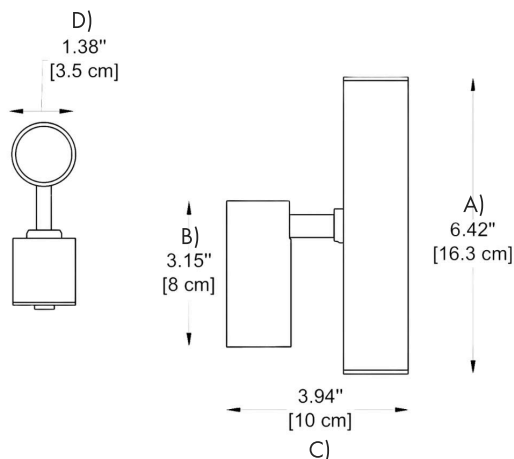

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-BCRV-TC-CUS-S-BL-BL

CODE FOR TRACK HEAD: DOT3-D9-B12-K30-C80-WL-DIM

CODE:

DOT3-D9-
B12-K30-
C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-50-D9

Dimensions:

A) Canopy Length - 8.19" (16.3 cm)

B) Head Length - 3.15" (8 cm)

C) Height - 3.94" (10 cm)

D) Diameter - 1.38" (3.5 cm)

Material:

Aluminum

Light Source:

LED / 5W / 378 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Weight (lb)

1,21

Beam Angle:

-B18 - 20°

-B24 - 30°

-B36 - 40°

-B60 - 60°

CCT:

-K27 - 2700K

-K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS - Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LU - LUTRON

-CS - CASAMBI

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

ACCESSORIES:

Pendant mounting kit for full circle profile, includes 3 sets.



Recessed mounted plate for magnetic track



New surface mounted for magnetic track, 1 set includes 1 pc of each accessory



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646