


FOTOMETRIC DATA P010B-00-A/P010B-00-B

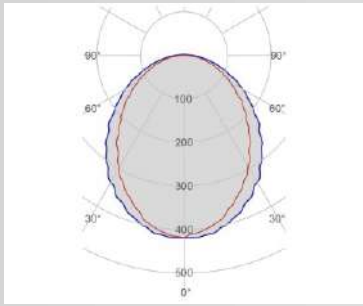


Electrical part	021.793.100
Power	10W
Light Output	1150lm
Colour Temperature	3000°K
CRI	90

Illuminance	1m	317lux
	2m	79lux
	3m	35lux
	4m	20lux
	5m	13lux

Lamp Light Output	66%
Light Output of the lamp	759lm
Beam Angle	88°
Beam Inclination	

FOTOMETRIC DATA P0010C-00-A/P010C-00-B

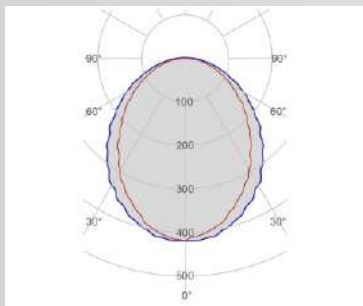


Electrical part	021.793.200
Power	20W
Light Output	2300lm
Colour Temperature	3000°K
CRI	90

Illuminance	1m	635lux
	2m	159lux
	3m	71lux
	4m	40lux
	5m	25lux

Lamp Light Output	66%
Light Output of the lamp	1518lm
Beam Angle	88°
Beam Inclination	

FOTOMETRIC DATA P011D-00-A/P010D-00-B:

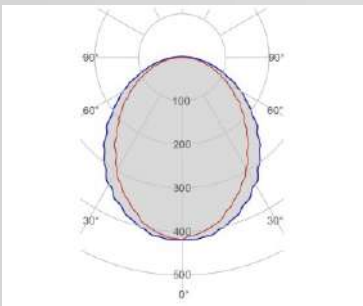

Electrical part	021.793.300
Power	30W
Light Output	3450lm
Colour Temperature	3000°K
CRI	90

Illuminance	1m	952lux
	2m	238lux
	3m	106lux
	4m	59lux
	5m	38lux

Lamp Light Output	66%
Light Output of the lamp	2277lm
Beam Angle	88°
Beam Inclination	


ACCESSORIES:

LED strip




Code 021.793
Power 10W/m
Tension 24Vdc
Flux 1150lm/m
Colour Temperature 3000°K
CRI 90
led/m 224


Other Accessories




Code P012.KIT01
Description Couple of end caps
Notes




Code 029.010.100
Description Replacement opal cover
Notes 1000mm



Code 029.017.100
Description Replacement opal cover
Notes L 1000mm



Code TGA
Description Cut to size
Notes (45°-90°)



Code TGP
Description Custom Cut
Notes (different angles)